




 **Knightsbridge**


# THE COMPLETE OUTDOOR RANGE



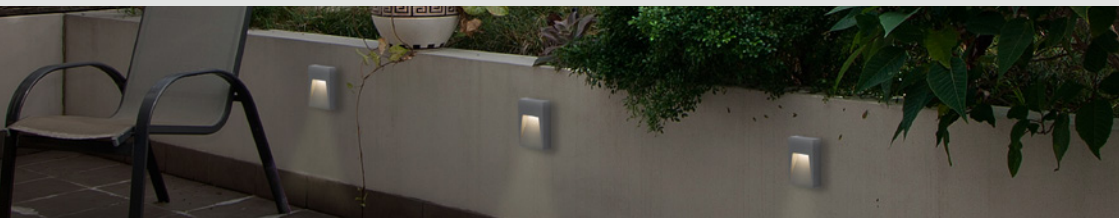

## WALL LIGHTS

Pages 12-25



## WEATHERPROOF ACCESSORIES

Pages 4-11



## SENSORS

Pages 47-48



## GROUND LIGHTS

Pages 35-41



## BOLLARDS & PEDESTALS

Pages 35-36



## SPIKE LIGHTS


Pages 26-31



## FLOODLIGHTS

Pages 42-45




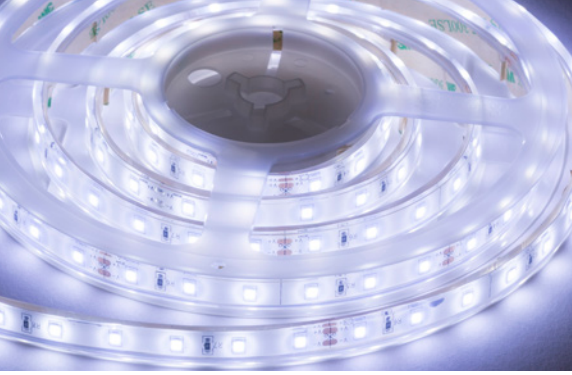

 **Knightsbridge**

WEATHERPROOF  
WIRING  
ACCESSORIES



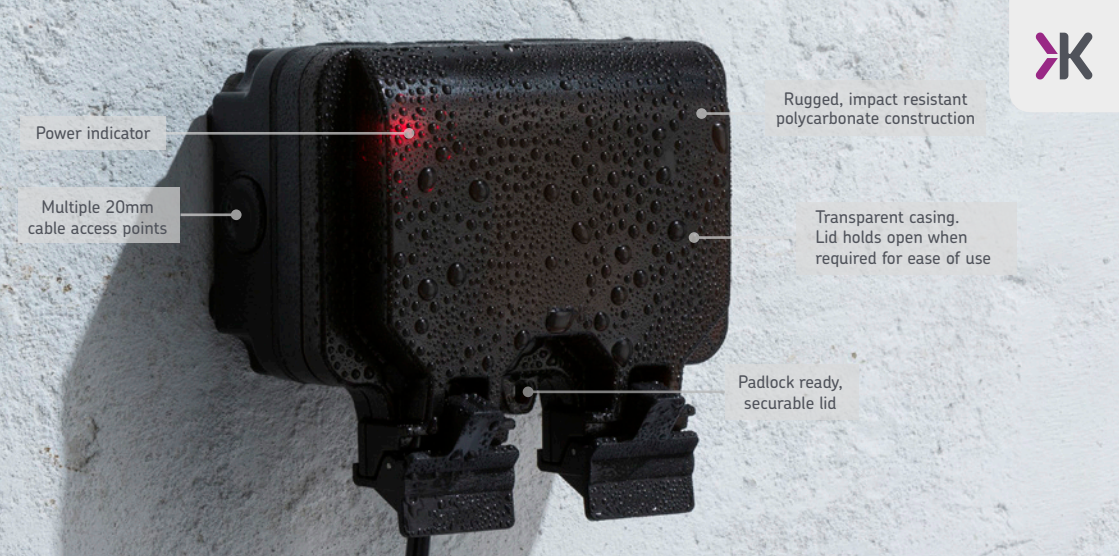

Power indicator

Multiple 20mm cable access points

Rugged, impact resistant polycarbonate construction

Transparent casing. Lid holds open when required for ease of use

Padlock ready, securable lid

IP66

IK06

## 13A OUTDOOR SWITCHED SOCKETS

Code	Size	Model
OP7N	1G	DP + Indicator (Twin Earth)
OP9N	2G	DP + Indicator (Twin Earth)
OP9RCD	2G	DP + RCD (Type-A)



## IP66 2G SMART OUTDOOR SWITCHED SOCKET

- Controls up to 2 outdoor appliances
- Manually override by using the switch on the socket
- Rugged outdoor enclosure
- Range: 20m-40m (depending on Wi-Fi signal coverage)

Code	Model
OP9KW	Smart Outdoor Socket



## 13A 2G REMOTE CONTROLLED OUTDOOR SOCKET

Remote control outdoor socket solution, enabling you to control your socket from a convenient key fob style remote control

- Control either socket from your key remote fob
- Ideal for controlling outdoor devices like water features or pond lighting
- Remote fob remote requires 2 x 3V CR2016 Lithium batteries (included)
- Range of up to 30m

Code	Model
OP9R	IP66 2G Remote Controlled Switched Socket





Rugged, impact resistant polycarbonate construction

Multiple 20mm cable access points

Built-in blue LED indicator

20AX switches

Unique circular rocker switch design

OP3

IP66

IK06

## 20AX OUTDOOR SWITCHES

- Manufactured from robust, high impact grade polycarbonate for a long life
- Black finish with unique circular rocker switch
- IP66 / IK06 rated
- 20AX 2-way switch function
- Multiple 20mm cable entries/exits allow for optimum positioning
- Certified to BS EN 60669-1

Code	Model
OP2	1G 2-Way with Indicator
OP3	2G 2-Way with Indicator
OP21	1G Retractive with Indicator



## FUSED SPUR UNITS

- Manufactured from robust, high impact grade polycarbonate for a long life
- Black finish with a smoked black front casing for indicator visibility
- IP66 / IK06 rated
- Transparent user-friendly lid with large catch feature makes it simple and easy to open and close, Lid can hold open when required for ease of use
- Wider cable channels and casing will accommodate most plugs with thick over-moulded strain reliefs typically associated with outdoor products
- Multiple 20mm cable entries/exits allow for optimum positioning
- Certified to BS 1363-4

Code	Model
OP63N	Switched + Indicator
OP6N	Unswitched + Indicator





OP3GBK

IP66 IK06

## OUTDOOR CONTROL BOXES

- Manual and RF remote control boxes
- Rugged and impact resistant polycarbonate construction
- Multiple 20mm cable access points
- Range of up to 20m on wireless models (dependent on environment)

Code	Load	Model	Finish
IP3G	13A	3G	Grey
OP3GBK	13A	3G	Black
IP5G	13A	5G	Grey
OP5GBK	13A	5G	Black



## RF REMOTE CONTROLLED

Code	Load	Model	Finish
IP663G	13A	3G Control Box + Remote	Grey
OP663GBK	13A	3G Control Box + Remote	Black
IP665G	13A	5G Control Box + Remote	Grey
OP665GBK	13A	5G Control Box + Remote	Black
IPREMOT	13A	Spare Remote Control	Grey
OPREMOT	13A	Spare Remote Control	Black







JB55BK

IP55

IK06

## WEATHERPROOF BOXES

Ideal for creating bespoke outdoor wiring requirements, for outdoor seasonal lighting, and general outdoor power requirements

- 5 channel gasket allows 1 x power in and 4 x power out, ideal for use with a 4G trailing socket
- Wall mountable via rear mounting plate
- Velcro mounting pad included with velcro tape
- Screwless design, easy to open and close



Code	Height	Width	Projection	Model
JB55	334mm	220mm	116mm	Grey
JB55BK	334mm	220mm	116mm	Black

## OUTDOOR ENCLOSURES

- Rugged, impact resistant polycarbonate construction
- Multiple 20mm cable access points
- Designed for use up to 230V 50Hz

Code	Height	Width	Projection	Model
JB007	86mm	74mm	62mm	Grey
JB008	86mm	125mm	62mm	Grey
JB009	111mm	181mm	100mm	Grey
JB0010	184mm	274mm	135mm	Grey

Code	Height	Width	Projection	Model
JB007BK	86mm	74mm	62mm	Black
JB008BK	86mm	125mm	62mm	Black
JB009BK	111mm	181mm	100mm	Black
JB0010BK	184mm	274mm	135mm	Black





JB003

IP68

## WEATHERPROOF CONNECTORS

- IP68 rated
- 450V 16A
- 3 pole
- For use with H07RNF 3G 0.75mm<sup>2</sup> to 4.0mm<sup>2</sup> cable

Code	Depth	Cable Diameter	Model
JB002	5bar	Min. 5mm / Max. 14mm	Inline Connector
JB003	2bar	Min. 5mm / Max. 14mm	3-Way Connector
JB004	2bar	Min. 5mm / Max. 10mm	3-Way Connector box
JB0011	2bar	Min. 5mm / Max. 12mm	Plug & Socket Connector



## IP66 CABLE GLAND

For use with outdoor switches, sockets, and enclosures

IP66

Code	Size	Qty
JB006	M20 (20mm)	10





# FLEX-CUT

24V colour-changing

24V IP67

24V high lumen

24V single colour

For all bespoke LED Flex lengths, providing a step-by-step guide to buying LED Flex and all available accessories



24V

IP67



## 24V IP67 SINGLE COLOUR LED FLEX

- Silicone encapsulated IP67 LED Flex, ideal for exterior use
- Dimmable when using **LEDFRA7** remote control unit, or when using constant voltage dimmable drivers (not included)

**Driver:** Required

**Compatible remote:** LEDFRA7



Code	Watts/mtr	LEDs/mtr	Colour	CCT	Width	Length	Lumens/mtr
LFC24IPWW	4.8W	64	Warm White	3000K	10mm	30000mm	560lm
LFC24IPCW	4.8W	64	Cool White	4000K	10mm	30000mm	610lm
LFC24IPDL	4.8W	64	Daylight	6000K	10mm	30000mm	590lm

## 24V IP67 COLOUR-CHANGING LED FLEX

- Silicone encapsulated IP67 LED Flex, ideal for exterior use
- Fully controllable with a selection of remote control units (not included)

**Driver:** Required

**Compatible remotes:** LEDFRA9



Code	Watts/mtr	LEDs/mtr	Colour	Width	Length
LFC24IPRGB	9W	36	RGB	12.2mm	30000mm

## 24V IP67 CCT ADJUSTABLE LED FLEX

- Silicone encapsulated IP67 LED Flex, ideal for exterior use
- Colour temperature adjustable, Warm White 2700K to Daylight 6000K

**Driver:** Required

**Compatible remotes:** LEDFRA8



Code	Watts/mtr	LEDs/mtr	Colour	Width	Length
LFC24IPCCT	11W	120	CCT 2700 - 6000K	12mm	30000mm






## SMART LED FLEX CONTROLLER

- Compatible with single colour, CCT, RGB, and RGBW Flex
- Enables users to adjust the colour temperature of their LED Flex via the SmartKnight app
- RGB and RGBW LED Flex only: enables users to adjust the RGB colour, with over 16 million colour options, via the SmartKnight app


Code	Model
LEDFWIFI	12V / 24V



### NO HUB REQUIRED

Products connect directly via Wi-Fi enabling global remote access.

No space and money wasted on additional hubs / gateway devices



### TIMERS

Set up schedules within the home, using the timer function to automate when devices turn on/off.



### VOICE CONTROL

Voice control works with Hey Google or Amazon Alexa



### GEOFENCING

Never come home to darkness; set up lights to automatically turn on/off based on your GPS location



### SCENES

Utilise preset scenes such as 'Movie', or create your own.

To explore our full range of LED Flex accessories, including connectors and drivers, please visit [mlaccessories.co.uk](http://mlaccessories.co.uk)





HEOD1309BK



## INFRARED HEATERS

- Pre-wired with 3m cable
- Wall and pole bracket supplied
- Supplied with 1.3kW Quartz shortwave infrared R7s double ended heat lamp - 254mm (lifespan of 3000hrs)
- No CO2 or NOx emissions
- Within a few seconds of operation, lamp reaches working temperature

**Construction:** Die-cast Aluminium

**Driver:** Not required

**Lamp type:** R7s

Height	Length	Depth (mm)
245	345	179

Code	Wattage	Model
HEOD1309BK	1300W	Black
HEOD1309W	1300W	White
HEOT1300W	1300W	254mm 1300W R7s Double Ended Lamp





**>Knightsbridge**

OUTDOOR WALL  
LIGHTS



WALL2LC

230V  
50Hz

IP65



## WALL1L WALL LIGHT

**Construction:** 304 Stainless Steel  
(WALL1LBK: Die-cast Aluminium)

**Lamp type:** GU10 LED



Code	Finish	Height	Diameter	Base Ø	Projection
WALL1L	Stainless Steel	120mm	60mm	78mm	86mm
WALL1LBK	Black	112mm	64mm	78mm	94mm
WALL1LC	Copper Effect	120mm	60mm	78mm	86mm

## WALL2L UP / DOWN WALL LIGHT

**Construction:** 304 Stainless Steel  
(WALL2LBK: Die-cast Aluminium)

**Lamp type:** GU10 LED



Code	Finish	Height	Diameter	Base Ø	Projection
WALL2L	Stainless Steel	162mm	60mm	78mm	86mm
WALL2LBK	Black	166mm	64mm	78mm	94mm
WALL2LC	Copper Effect	162mm	60mm	78mm	86mm

## WALL3L WALL LIGHT

**Construction:** 304 Stainless Steel  
(WALL3LBK: Die-cast Aluminium)

**Lamp type:** GU10 LED



Code	Finish	Height	Diameter	Base Ø	Projection
WALL3L	Stainless Steel	140mm	60mm	78mm	155mm
WALL3LBK	Black	145mm	64mm	78mm	166mm
WALL3LC	Copper Effect	140mm	60mm	78mm	155mm



WALL4LSS



### WALL4L UP/DOWN WALL LIGHT WITH PIR SENSOR

- Sensor detection range 8m when mounted at 2.4m
- PIR field of detection: 110°
- Includes manual override

**Construction:** 304 Stainless Steel

**Lamp type:** GU10 LED

Code	Finish	Height	Diameter	Projection
WALL4LSS	Stainless Steel	222mm	60mm	112mm



### WALL5L WALL LIGHT WITH PIR SENSOR

- Sensor detection range 8m when mounted at 2.4m
- PIR field of detection: 110°
- Includes manual override

**Construction:** 304 Stainless Steel

**Lamp type:** GU10 LED

Code	Finish	Height	Diameter	Projection
WALL5LSS	Stainless Steel	184mm	60mm	112mm



**Important:**

Some of our outdoor lighting products may not be suitable for use in coastal areas where salt corrosion is prevalent.



WALL2

230V  
50Hz

IP65



## HEAVY GAUGE WALL LIGHTS

**Construction:** 304 Stainless Steel

**Lamp type:** GU10 LED



Code	Finish	Height	Diameter	Base Ø	Projection
WALL1	Stainless Steel	108mm	62mm	76mm	92mm
WALL2	Stainless Steel	160mm	62mm	76mm	92mm
WALL3	Stainless Steel	140mm	62mm	76mm	162mm



MATCHING  
SPIKE LIGHTS  
AND BOLLARDS  
AVAILABLE





OWALL1BK



## SINGLE FITTINGS

**Construction:** 201 Stainless Steel  
**Lamp type:** GU10 LED



Code	Finish	Height	Diameter	Projection
OWALL1A	Anthracite	120mm	60mm	96mm
OWALL1BC	Brushed Chrome	120mm	60mm	96mm
OWALL1BK	Black	120mm	60mm	96mm
OWALL1W	White	120mm	60mm	96mm

## UP/DOWN FITTINGS

**Construction:** 201 Stainless Steel  
**Lamp type:** GU10 LED x 2



Code	Finish	Height	Diameter	Projection
OWALL2A	Anthracite	170mm	60mm	96mm
OWALL2BC	Brushed Chrome	170mm	60mm	96mm
OWALL2BK	Black	170mm	60mm	96mm
OWALL2W	White	170mm	60mm	96mm

## PHOTOCELL SENSOR MODELS

**Construction:** 201 Stainless Steel  
**Lamp type:** GU10 LED



Code	Finish	Height	Diameter	Projection	Code	Finish	Height	Diameter	Projection
OWALL1AP	Anthracite	120mm	60mm	96mm	OWALL2AP	Anthracite	170mm	60mm	96mm
OWALL1BCP	Brushed Chrome	120mm	60mm	96mm	OWALL2BCP	Brushed Chrome	170mm	60mm	96mm
OWALL1BKP	Black	120mm	60mm	96mm	OWALL2BKP	Black	170mm	60mm	96mm
OWALL1WP	White	120mm	60mm	96mm	OWALL2WP	White	170mm	60mm	96mm



WAD12A

230V  
50Hz

IP65



3  
YEAR  
WARRANTY



## ADJUSTABLE UP/DOWN WALL LIGHTS

- Adjustable beam angle, from 0° to 100°
- Independently adjustable lighting effect

**Construction:** Die-cast Aluminium

**Driver:** Integral

**Lamp type:** LED

Height	Width	Projection (mm)
125	100	100



Code	Wattage	Finish	Colour	CCT	Lumens
WAD12AA	2 x 6W	Anthracite	Warm White	3000K	2 x 300lm
WAD12ABK	2 x 6W	Matt Black	Warm White	3000K	2 x 300lm

## LED STAINLESS STEEL EXTERIOR WALL LIGHTS

**Construction:** 304 Stainless Steel

**Driver:** Integral

**Lamp type:** LED



Code	Wattage	Finish	Colour	CCT	Height	Width	Projection	Lumens
NH022W	2 x 3W	Stainless Steel	Daylight	6000K	147mm	70mm	73mm	30lm

## LED ROUND WALL LIGHT WITH INTERCHANGEABLE FASCIA

- Supplied with 2 magnetic interchangeable plate options

**Construction:** Die-cast Aluminium

**Driver:** Integral

**Lamp type:** LED

Overall Ø	Projection (mm)
155	48



Code	Wattage	Finish	Colour	CCT	Lumens
RD10BK	10W	Matt Black	Warm White	3000K	570lm



NH020W



## LED GUIDE / STAIR / WALL LIGHTS

**Construction:** Die-cast Aluminium

**Driver:** Integral

**Lamp type:** LED

Height	Width	Cut-out	Recessed Depth (mm)
121	121	110	70

Code	Wattage	Finish	Colour	CCT	Lumens
NH016W	0.8W	Grey	Daylight	6000K	55lm
NH017W	0.8W	Grey	Daylight	6000K	55lm



NH016W



NH017W

## WHITE / BLUE RECESSED LED GUIDE LIGHTS

**Construction:** Die-cast Aluminium

**Driver:** Integral

**Lamp type:** LED



Height	Width	Cut-out	Recessed Depth (mm)
80	80	75	50

Code	Wattage	Finish	Colour	CCT	Lumens
NH020B	1W	Matt White	Blue	-	-
NH020W	1W	Matt White	Daylight	6000K	45lm
NH019W	1W	Matt White	Daylight	6000K	45lm



NH020W



NH020B



NH019W

### Important:

Some of our outdoor lighting products may not be suitable for use in coastal areas where salt corrosion is prevalent.





RWL2W



## LED WALL / GUIDE LIGHTS

**Construction:** Aluminium

**Driver:** Integral

**Lamp type:** LED



LWR4W



LWR2G



LWS4G



LWS2W

Code	Shape	Wattage	Finish	Colour	CCT	Diameter	Projection	Lumens
LWR2G	Round	3W	Grey	Warm White	3500K	115mm	28mm	160lm
LWR2W	Round	3W	White	Warm White	3500K	115mm	28mm	160lm
LWR4G	Round	5W	Grey	Warm White	3500K	220mm	28mm	230lm
LWR4W	Round	5W	White	Warm White	3500K	220mm	28mm	230lm

Code	Shape	Wattage	Finish	Colour	CCT	Height	Width	Projection	Lumens
LWS2G	Square	3W	Grey	Warm White	3500K	105mm	105mm	28mm	160lm
LWS2W	Square	3W	White	Warm White	3500K	105mm	105mm	28mm	160lm
LWS4G	Square	5W	Grey	Warm White	3500K	200mm	200mm	28mm	230lm
LWS4W	Square	5W	White	Warm White	3500K	200mm	200mm	28mm	230lm

## LED GUIDE LIGHTS

**Construction:** Aluminium

**Driver:** Integral

**Lamp type:** LED



RWL2A



RWL5W

Code	Wattage	Finish	Colour	CCT	Height	Width	Projection	Lumens
RWL2A	2W	Anthracite	Warm White	3500K	140mm	100mm	32mm	105lm
RWL2W	2W	White	Warm White	3500K	140mm	100mm	32mm	105lm
RWL5A	5W	Anthracite	Warm White	3500K	70mm	200mm	32mm	230lm
RWL5W	5W	White	Warm White	3500K	70mm	200mm	32mm	230lm





BL5BK



## CCT ADJUSTABLE SURFACE-MOUNT LED BRICKLIGHTS

- Robust, polycarbonate construction, ideal for Outdoor path / walkway lighting. slim profile, surface mount installation can avoid additional cut out while achieving similar bricklight look and feel.
- Colour temperature adjustable (3000K or 4000K)
- Supplied with 3 x accessories (Grill, Louvre, Shade)
- Kit available to transform fitting to retrofit, recessed bricklight (not included)

**Construction:** Polycarbonate

**Driver:** Integral

**Lamp type:** LED



CCT version only

Height	Length	Projection (mm)
100	235	32



Code	Wattage	Finish	Colour	CCT	Lumens	
BL5BK	5W	Black	CCT	3000/4000K	495/530lm	
BL5G	5W	Grey	CCT	3000/4000K	495/530lm	
BL5BLBK	5W	Black	Blue	-	65lm	<b>NEW</b>
BL5BLG	5W	Grey	Blue	-	65lm	<b>NEW</b>

## RETROFIT KITS

- Back box accessory kit to convert BL5xx fitting to a bricklight, enabling retrofitting or replace existing installations

Height	Length	Projection	Cut-out (mm)
100	235	14	L/H/D 197 x 70 x56

Code	Model
BLKITBK	Retrofit kit - black
BLKITG	Retrofit kit - grey



### Important:

Some of our outdoor lighting products may not be suitable for use in coastal areas where salt corrosion is prevalent.



BLED5SW



## LED BRICKLIGHT

- Supplied complete with 2 fascia plates  
- Plain and louvre/grille

**Construction:** Aluminium

**Driver:** Integral

**Lamp type:** LED



3500K version only



Height	Length	Recessed Depth	Cut-out L/H/D (mm)		
101	235	70	226 x 86 x 70		
Code	Wattage	Finish	Colour	CCT	Lumens
BLED5BB	5W	Black	Blue	-	-
BLED5BW	5W	Black	Warm White	3500K	110lm
BLED5SB	5W	Brushed Steel	Blue	-	-
BLED5SW	5W	Brushed Steel	Warm White	3500K	110lm



LANT1



## EXTERIOR LED LANTERNS

- Durable, corrosion-resilient construction
- Low-maintenance, long-life and energy efficient
- Sensor detection angle 90° with manual override (PIR models)

**Construction:** Polycarbonate

**Driver:** Integral

**Lamp type:** LED



Height	Width	Base Ø	Projection (mm)
375	177	97	230

Code	Wattage	Mode	Finish	Colour	CCT	Lumens
LANT1	8W	Standard	Black	Cool White	4000K	555lm
LANT1W	8W	Standard	White	Cool White	4000K	555lm
LANT2	8W	With PIR	Black	Cool White	4000K	555lm
LANT2W	8W	With PIR	White	Cool White	4000K	555lm
LANT1BKP	8W	Photocell	Black	Cool White	4000K	555lm <b>NEW</b>
LANT1WP	8W	Photocell	White	Cool White	4000K	555lm <b>NEW</b>



## EXTERIOR LED HALF-LANTERNS

- Sensor detection angle 90° with manual override (PIR models)

**Construction:** Polycarbonate

**Driver:** Integral

**Lamp type:** LED



Height	Width	Projection (mm)
362	175	99

Code	Wattage	Mode	Finish	Colour	CCT	Lumens
LANT3	8W	Standard	Black	Cool White	4000K	440lm
LANT3W	8W	Standard	White	Cool White	4000K	440lm
LANT4	8W	With PIR	Black	Cool White	4000K	440lm
LANT4W	8W	With PIR	White	Cool White	4000K	440lm
LANT3BKP	8W	Photocell	Black	Cool White	4000K	440lm <b>NEW</b>
LANT3WP	8W	Photocell	White	Cool White	4000K	440lm <b>NEW</b>



### Important:

Some of our outdoor lighting products may not be suitable for use in coastal areas where salt corrosion is prevalent.



NH027



## STAINLESS STEEL EXTERIOR WALL LIGHTS

**Construction:** 201 Stainless Steel

**Driver:** Not Required

**Lamp type:** E27 (40W max.)

Height	Width (mm)
276	205



NH027



NH027S



NH028



NH028S

Code	Mode	Finish	Projection
NH027	Window Fascia	Stainless Steel	90mm
NH027S	Window Fascia with PIR	Stainless Steel	96mm
NH028	Slotted Fascia	Stainless Steel	90mm
NH028S	Slotted Fascia with PIR	Stainless Steel	96mm

## STAINLESS STEEL LANTERN

- Stainless steel with clear glass
- Powder-coated finish
- LED compatible

**Construction:** 304 Stainless Steel

**Driver:** Not Required

**Lamp type:** E27 (40W max.)



Code	Finish	Height	Width	Base	Projection(mm)
LANTBK	Anthractive	200	120	H: 100 W:78	150
LANTSS	Brushed Chrome	200	120	H: 100 W:78	150



### Important:

Some of our outdoor lighting products may not be suitable for use in coastal areas where salt corrosion is prevalent.

OL01W



## E27 OUTDOOR WALL LIGHT

**Construction:** Die-cast Aluminium

**Driver:** Not Required

**Lamp type:** E27 (20W max.)

Code	Finish	Height	Width	Projection (mm)
OL01W	Black	245	108	148



## GU10 WALL LIGHT

**Construction:** 304 Stainless Steel

**Driver:** Not Required

**Lamp type:** GU10 LED

Code	Finish	Diameter	Height	Projection (mm)
GDL1	Anthraccite	102	195	144



## E27 OUTDOOR WALL LIGHT

**Construction:** Aluminium & glass

**Driver:** Not Required

**Lamp type:** E27 GLS (15W max.)

Code	Finish	Diameter	Height	Projection (mm)
OLG1W	Black	130	295	185



MATCHING BOLLARDS  
ALSO AVAILABLE





 **Knightsbridge**

SPIKE LIGHTS



SPIKEGUBK



## GROUND SPIKE LIGHT

- Supplied with 1.5m cable
- Supplied with wall mount and ground spike

**Construction:** Die-cast Aluminium

**Driver:** Not Required

**Lamp type:** GU10 LED

Code	Finish	Overall Ø	Height	Spike Length (mm)
SPIKEGUBK	Black	65	330	173



## GROUND SPIKE LIGHT

- Supplied with 3m cable

**Construction:** 304 Stainless Steel (GU10SPIKE) / Die-cast Aluminium (GU10SPIKEBK)

**Driver:** Not Required

**Lamp type:** GU10 LED

Code	Finish	Overall Ø	Height	Spike Length (mm)
GU10SPIKE	Stainless Steel	65	250	120
GU10SPIKEBK	Black	65	250	120





GUSPIKES

230V  
50Hz

IP65



## GROUND SPIKE LIGHT

- Supplied with 2m cable

**Construction:** Die-cast Aluminium

**Driver:** Not Required

**Lamp type:** GU10 LED

Code	Finish	Overall Ø	Height	
GUSPIKES	Black	72	327	<b>NEW</b>
GUSPIKER	Black	72	343	<b>NEW</b>



## LIGHT GAUGE SPIKE LIGHT

- Supplied with 2m cable

**Construction:** 304 Stainless Steel

**Driver:** Not Required

**Lamp type:** GU10 LED

Code	Finish	Overall Ø	Height	Spike Length (mm)
GU10SPIKEL	Stainless Steel	60	250	120



## EXTENSION SPIKES

**Construction:** Stainless Steel

Code	Finish	Height
EXT2	Stainless Steel	604mm
EXT3	Black	604mm







GUSPGR



## GROUND SPIKE LIGHT

- Wall-mountable option
- Supplied with 2m cable

**Construction:** Die-cast Aluminium / Spike - Polycarbonate

**Driver:** Not Required

**Lamp type:** GU10 LED (10W max.)



Code	Finish	Overall Ø	Height	Spike Length (mm)
GUSPBK	Black	98	326	170
GUSPGR	Grey	98	326	170
SPIKEXT1	Black			

## GROUND SPIKE LIGHT

- Supplied with 2m cable

**Construction:** Die-cast Aluminium

**Driver:** Not Required

**Lamp type:** GU10 LED



Code	Finish	Overall Ø	Height	Spike Length (mm)
SPIKE50BL	Black	98	345	165



### Important:

Some of our outdoor lighting products may not be suitable for use in coastal areas where salt corrosion is prevalent.



SPIKE5A

230V  
50Hz

IP65

LED BLACK SPIKE LIGHT

- Supplied with 2m cable

**Construction:** 304 Stainless Steel Bezel, Die-cast Aluminium Body  
**Lamp type:** CoB LED



Code	Wattage	Finish	Colour	CCT	Lumens	Overall Ø	Height	Spike Length (mm)
SPIKE5A	6W	Black	Warm White	3000K	380lm	95	340	210



LED BLACK SPIKE LIGHT

- Supplied with 3m cable
- Supplied with wall mount and spike

**Construction:** Die-cast Aluminium  
**Lamp type:** CoB LED



Code	Wattage	Finish	Colour	CCT	Lumens	Overall Ø	Height	Spike Length (mm)
SPIKE4BL	4W	Black	Warm White	3000K	355lm	60	305	173





SPIKE55



## LED SPIKE LIGHT

- Supplied with 2m cable

**Construction:** 304 Stainless Steel

**Lamp type:** CoB LED



Code	Wattage	Finish	Colour	CCT	Lumens	Overall Ø	Height	Spike Length (mm)
SPIKE55	6W	Stainless Steel	Warm White	3000K	400lm	63	255	110



## MINI ALUMINIUM LED SPIKE LIGHT

**Construction:** Aluminium

**Lamp type:** CoB LED



Code	Wattage	Finish	Colour	CCT	Lumens	Overall Ø	Height	Spike Length (mm)
LSPIKEA	4W	Brushed Chrome	Warm White	3000K	175lm	49	227	110



## LED SPIKE LIGHT

**Construction:** 304 Stainless Steel

**Driver:** 350mA constant current driver required

**Lamp type:** CoB LED



Code	Wattage	Finish	Colour	CCT	Lumens	Overall Ø	Height	Spike Length (mm)
SPIKEW	1W	Stainless Steel	Daylight	6000K	85lm	49	225	120



### Important:

Some of our outdoor lighting products may not be suitable for use in coastal areas where salt corrosion is prevalent.







**>Knightsbridge**

BOLLARDS &  
PEDESTALS



OL01B

230V  
50Hz

IP54



## E27 OUTDOOR PEDESTAL AND BOLLARD

• Opal polycarbonate 360° diffuser

**Construction:** Die-cast Aluminium

**Driver:** Not Required

**Lamp type:** E27 (20W max.)

Code	Model	Finish	Height	Width	Depth
OL01P	Pedestal	Black	265mm	108mm	108mm
OL01B	Bollard	Black	650mm	108mm	108mm



OL01P



OL01B

## E27 OUTDOOR PEDESTAL

**Construction:** Aluminium & glass

**Driver:** Not Required

**Lamp type:** E27 GLS (15W max.)

Code	Model	Finish	Height	Diameter
OLG1P	Pedestal	Black	500mm	150mm



MATCHING WALL LIGHTS  
ALSO AVAILABLE



GDL2

230V  
50Hz

IP54

### GU10 BOLLARDS

**Construction:** 304 Stainless Steel  
**Lamp type:** GU10 LED



GDLMK23      GDLSPIKE2

Code	Model	Diameter	Height
GDL2	GU10 Bollard	102mm	650mm
GDL3	GU10 Bollard	102mm	1100mm
GDLMK23	Mounting Kit for GDL2 and GDL3	135mm	155mm
GDLSPIKE2	Ground Spike for GDL2	87mm	400mm

### GROUND BOLLARD

**Construction:** 304 Stainless Steel  
**Lamp type:** GU10 LED

Code	Finish	Height
GROUND2	Stainless Steel	260mm



IP65



MATCHING WALL LIGHTS  
 ALSO AVAILABLE

**Important:**  
 Some of our outdoor lighting products may not be suitable for use in coastal areas where salt corrosion is prevalent.





**>Knightsbridge**

GROUND  
LIGHTS



316WALK



## GU10 GROUND LIGHT

**Construction:** 304 Stainless Steel

**Driver:** Not Required

**Lamp type:** GU10 LED

Code	Model	Bezel	Cut-out	Recessed Depth (mm)
WGULEN	Round	105	92	158



## GU10 GROUND LIGHT

**Construction:** 304 Stainless Steel

**Driver:** Not Required

**Lamp type:** GU10 LED

Cut-out	Recessed Depth (mm)
92	132

Code	Model	Bezel
WGULED	Round	105mm
WSGULED	Square	100mm x 100mm
WHGULED	Hexagon	115mm x 100mm



WGULED



WSGULED



WHGULED

## 316 STAINLESS STEEL GU10 GROUND LIGHT

**Construction:** 316 Stainless Steel

**Driver:** Not Required

**Lamp type:** GU10 LED

Code	Model	Bezel	Cut-out	Sleeve Ø	Recessed Depth (mm)
316WALK	316 Stainless Steel	101	80	95	190





LEDGL3W

230V  
50Hz

IP65

## LED GROUND LIGHTS

- Ideal for driveways and decking, safe for indoor and outdoor use
- Supplied with 2m outdoor flexible cable

**Construction:** 304 Stainless Steel

**Driver:** Integral

**Lamp type:** LED



Bezel	Cut-out Ø	Recessed Depth (mm)
92	78	94

Code	Wattage	Model	Colour	CCT	Lumens
LEDGL3W	3W	Stainless Steel	Warm White	3000K	270lm
LEDGL3D	3W	Stainless Steel	Daylight	6000K	290lm

## GROUND LIGHT WITH HALF LIP

**Construction:** 304 Stainless Steel

**Driver:** Not Required

**Lamp type:** GU10 LED

230V  
50Hz

IP65



Code	Model	Bezel	Cut-out Ø	Sleeve Ø	Recessed Depth	Overall Height (mm)
CAPWGU	Stainless Steel	88	65	70	109	138





LEDM08W1

230V  
50Hz

IP65



## COB LED GROUND LIGHTS

- Pre-wired with 2m cable

**Construction:** 304 Stainless Steel

**Driver:** Integral

**Lamp type:** CoB LED



Code	Wattage	Finish	Colour	CCT	Bezel Ø	Sleeve Ø	Recessed Depth	Lumens
LDGL5	5W	Stainless Steel	Warm White	3000K	68mm	60mm	80mm	240lm
LDGL6	6W	Stainless Steel	Warm White	3000K	129mm	114mm	70mm	405lm
LDGL9	9W	Stainless Steel	Warm White	3000K	160mm	144mm	88mm	610lm

## LED GROUND LIGHTS

- Pre-wired with 1.5m cable

**Construction:** Stainless Steel & Aluminium

**Driver:** integral

**Lamp type:** LED



Bezel	Cut-out	Sleeve Ø	Recessed Depth (mm)
62	50	60	82.5

Code	Wattage	Finish	Colour	CCT	Lumens
LEDM07B	1.5W	Stainless Steel	Blue	-	-
LEDM07W	1.5W	Stainless Steel	Cool White	4000K	70lm

## LED SHALLOW GROUND LIGHTS

- Pre-wired with 2.5m cable
- Supplied with polycarbonate housing
- This fitting is extremely shallow making it very versatile

**Construction:** Stainless Steel & Aluminium

**Driver:** Integral

**Lamp type:** LED



Bezel Ø	Cut-out Ø	Sleeve Ø	Recessed Depth (mm)
110	90	97	52

Code	Wattage	Finish	Colour	CCT	Lumens
LEDM08B1	1.7W	Stainless Steel	Blue	-	-
LEDM08W1	1.7W	Stainless Steel	Cool White	4000K	90lm



LEDM06W




## LED WALL MARKER / GROUND LIGHTS WITH INTERCHANGEABLE FASCIAS

- Supplied with 3 interchangeable chrome effect polycarbonate heads for directional light output
- Suitable for ground and wall installation
- Pre-wired with 2m cable

**Construction:** Stainless Steel & Polycarbonate

**Driver:** Integral

**Lamp type:** LED

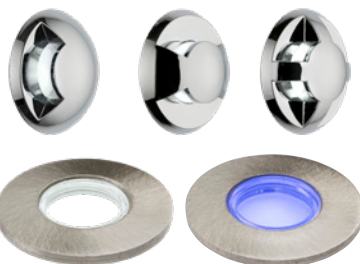

Bezel Ø	Cut-out Ø	Recessed Depth (mm)
38	32	48

Code	Wattage	Finish	Colour	CCT	Lumens
LEDM06B	0.6W	Brushed Nickel	Blue	-	-
LEDM06W	0.6W	Brushed Nickel	Daylight	6000K	50lm

## LED DECKING KIT

- 10 x 0.2W LED
- Stainless steel bezels supplied as standard

**Construction:** Polycarbonate

**Driver:** Included

**Lamp type:** LED



Bezel Ø	Cut-out Ø	Recessed Depth (mm)
30	25	27

Code	Wattage	Finish	Colour	CCT	Lumens
KIT16WW	2.2W	Stainless Steel	Warm White	3000K	105lm
KIT16W	2.2W	Stainless Steel	Daylight	6000K	90lm
KIT16B	2.2W	Stainless Steel	Blue	-	-



HPLED1W

230V  
50Hz

IP65



## LED DECKING LIGHTS (1W)

- Weight load: 500kg

Construction: 304 Stainless Steel

Driver: Integral

Lamp type: LED



Bezel Ø	Cut-out Ø	Sleeve Ø	Recessed Depth (mm)
62	40	60	90

Code	Wattage	Finish	Colour
HPLED1W	1W	Stainless Steel	Daylight



## CONSTANT CURRENT LED DECKING LIGHTS

- 350mA constant current driver required

Construction: 304 Stainless Steel

Driver: Required

Lamp type: LED



Daylight only

Bezel Ø	Cut-out Ø	Recessed Depth (mm)
60	50	40

Code	Wattage	Finish	Colour
1IPB	1W	Stainless Steel	Blue
1IPW	1W	Stainless Steel	Daylight



350mA

IP68



## LED DECKING LIGHTS (0.5W)

- 24V constant voltage

Construction: 304 Stainless Steel

Driver: Required

Lamp type: LED



Cool white only

Bezel Ø	Cut-out Ø	Recessed Depth (mm)
36	28	59

Code	Wattage	Finish	Colour
4IPB	0.5W	Stainless Steel	Blue
4IPW	0.5W	Stainless Steel	Cool White



24V

IP67







 **Knightsbridge**

FLOODLIGHTS



FLR10

230V  
50Hz

IP65



3  
YEAR  
WARRANTY



## LED FLOODLIGHTS

Exclusive to Knightsbridge, this range of floodlights is manufactured from die-cast aluminium with anti-glare fascia. Ideal for domestic and commercial installations

- Instant ignition and high lumen output with driver-on-board SMD LED technology
- Installation via easy-fix angled mounting bracket
- Internal junction box enables the installer to wire directly to the fixture without the need for external connections and boxes
- PIR sensor versions also available with override function, adjustable time, sensitivity, and lux levels

**Construction:** Die-cast Aluminium

**Lamp type:** LED

**PIR field of detection:** 120°



Code	Wattage	Model	Colour	CCT	Height	Width	Depth	Lumens
FLR10	10W	Standard	Cool White	4000K	105mm	130mm	53mm	800lm
FLR20	20W	Standard	Cool White	4000K	125mm	150mm	53mm	1600lm
FLR30	30W	Standard	Cool White	4000K	160mm	185mm	53mm	2400lm
FLR50	50W	Standard	Cool White	4000K	205mm	225mm	53mm	4000lm
FLR10P	10W	With PIR	Cool White	4000K	140mm	130mm	53mm	800lm



Angled bracket for easy installation



Lux, time, and range adjustment on PIR models, with manual override function



Internal junction box for direct wiring



FLP100

230V  
50Hz

IP65



3  
YEAR  
WARRANTY



## HIGH POWER LED FLOODLIGHTS

LED Floodlights with high lumen output and instant ignition makes this luminaire ideal for security / high level illumination in commercial, retail, and industrial environments

- Internal terminal block on the rear allows for direct wiring
- Low maintenance and energy efficient with high output
- Fortified bracket and fastenings



**Construction:** Die-cast Aluminium

**Driver:** Integral

**Lamp type:** LED



Code	Wattage	Colour	CCT	Height	Width	Depth	Lumens
FLP100	100W	Cool White	4000K	205mm	300mm	60mm	8400lm
FLP100A	100W	Daylight	6000K	205mm	300mm	60mm	9200lm
FLP150	150W	Cool White	4000K	237mm	360mm	73mm	13500lm
FLP150A	150W	Daylight	6000K	237mm	360mm	73mm	14100lm
FLPA200	200W	Cool White	4000K	237mm	360mm	73mm	19655lm
FLP200A	200W	Daylight	6000K	237mm	360mm	73mm	18400lm



Internal terminal block for direct wiring





FL16ABK

230V  
50Hz

IP55



3  
YEAR  
WARRANTY



## LED SECURITY SPOTLIGHTS WITH PIR


- Adjustable die-cast aluminium head and polycarbonate body
- Cree LED
- Instant ignition
- Easy-fix mounting for simple installation
- Integral 180° PIR sensor with adjustable lux and time set 10m detection range (approx.)

**Construction:** Die-cast Aluminium & Polycarbonate

**Driver:** Integral

**Lamp type:** LED

**PIR field of detection:** 180°

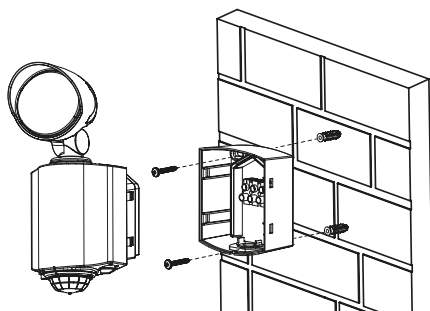

Code	Wattage	Finish	CCT	Height	Width	Projection	Lumens
FL8ABK	8W	Black	5000K	176mm	78mm	107mm	610lm
FL8AW	8W	White	5000K	176mm	78mm	107mm	610lm
FL16ABK	2 x 8W	Black	5000K	176mm	141mm	113mm	1300lm
FL16AW	2 x 8W	White	5000K	176mm	141mm	113mm	1300lm





FLTPB



## TWIN SPOT SECURITY FLOODLIGHTS

- 2 x 9W LED
- Individual adjustable heads
- Long life and low-maintenance
- Ideal for outdoor and indoor applications; domestic, retail, and commercial use

PIR version:

- Illuminates for a fixed period of 90 seconds - illumination is constant whilst movement is detected
- Manual override facility
- Maximum detection distance approx. 8 metres

**Construction:** Die-cast Aluminium

**Driver:** Integral

**Lamp type:** CoB LED

**PIR field of detection:** 120°



Code	Wattage	Model	CCT	Height	Width	Projection	Lumens
FLTB	2 x 9W	Black	3500K	104mm	205mm	150mm	1455lm
FLTW	2 x 9W	White	3500K	104mm	205mm	150mm	1455lm
FLTPB	2 x 9W	Black with PIR	3500K	120mm	205mm	150mm	1455lm
FLTPW	2 x 9W	White with PIR	3500K	120mm	205mm	150mm	1455lm



 **Knightsbridge**

SENSORS





OS001B

230V  
50Hz

IP55

MANUAL  
OVERRIDE

CORNER  
MOUNTABLE

## OUTDOOR PIR SENSORS

- Completely adjustable head unit for optimum positioning
- Easy to install – wire to the rear mounting plate then simply click the PIR unit into the mounting plate
- Versatile mounting options including wall, ceiling, or corner mounting
- Includes shrouding kit for shielding parts of the PIR to prevent accidental activation
- Automatic operation or manual override function



OS001



OS001B

**Field of detection: 200°**

Code	Range*	Function	Max. Load	Colour
OS001	12m	Override function / Adjustable Lux Adjustable Time (3 sec - 30mins)	2000W Incandescent / 225W LED	White
OS001B	12m	Override function / Adjustable Lux Adjustable Time (3 sec - 30mins)	2000W Incandescent / 225W LED	Black

## OUTDOOR PIR SENSORS

- Adjustable head unit (up /down)
- Wall or ceiling mountable

**Field of detection: 180°**



OS004



OS004B

230V  
50Hz

IP44

Code	Range*	Function	Max. Load	Colour
OS004	12m	Adjustable Lux / Adjustable Time (10s - 8mins)	1200W Incandescent / 300W LED	White
OS004B	12m	Adjustable Lux / Adjustable Time (10s - 8mins)	1200W Incandescent / 300W LED	Black

\* When mounted at 2.4 metres high



OS0014

230V  
50Hz

IP44

## OUTDOOR PIR SENSORS (COMPACT)

- Adjustable head unit
- Wall or ceiling mountable

**Field of detection: 180°**

\* When mounted at 2.4 metres high



OS0014



OS0014B

Code	Range*	Function	Max. Load	Colour
OS0014	12m	Adjustable Lux / Adjustable Time (10 sec - 15mins)	2000W Incandescent 1000W LED	White
OS0014B	12m	Adjustable Lux / Adjustable Time (10 sec- 15mins)	2000W Incandescent 1000W LED	Black

## OUTDOOR PHOTOCELL SENSOR

- Dusk-to-dawn photocell timer. Ideal for controlling outdoor lighting during the evenings for security and convenience
- Suitable for shop window display lighting or advertising systems
- Wall mountable - easy installation



230V  
50Hz

IP55

Code	Function	Max. Load	Colour
OS006	Ambient Light Memory Function - 2/4/6/8hr durations	1000W Incandescent / 200W LED	White
OS006B	Ambient Light Memory Function - 2/4/6/8hr durations	1000W Incandescent / 200W LED	Black

## PHOTOCELL SENSORS



TRPCKIT



TRRPC



OSPCKIT

230V  
50Hz

Code	Function	IP Rating	Max. Load	Colour
TRPCKIT	NEMA Photocell Kit - Dusk-to-Dawn Sensor	IP54	2000W Tungsten Halogen, 2 x 400W SON 3 x 150W HQI, 1800vA	Black
TRRPC	Remote Miniature Photocell	IP65	2000W Tungsten Halogen, 2 x 400W SON 3 x 150W HQI, 1800vA	Black
OSPCKIT		IP66	10A / Incandescent 1000W / LED 300W	Black



@KnightsbridgeML



@Knightsbridgemla



@Knightsbridgemla



01582 88 77 60



[mlaccessories.co.uk](http://mlaccessories.co.uk)