

## INSTALLATION & MAINTENANCE MANUAL SHEXX



230V  
50Hz

IP  
65



**ML**  
ACCESSORIES LTD



CE



134

## GENERAL INSTRUCTIONS

**These instructions should be read carefully and retained after installation by the end user for future reference and maintenance.**

**These instructions should be used to aid installation of the following products:**


**SHE1B / SHE1G / SHE2B / SHE2G**

## SAFETY

- This product must be installed in accordance with the latest edition of the IEE Wiring Regulations (BS7671) and current Building Regulations. If in any doubt, consult a qualified electrician
- Please isolate mains prior to installation or maintenance
- Check the total load on the circuit (including when this luminaire is fitted) does not exceed the rating of the circuit cable, fuse or circuit breaker
- Please note the IP (Ingress Protection) rating of this luminaire when deciding the location for installation
- This product is Class I and must be earthed
- This product is IP65 rated


## INSTALLATION

- Provide power to the required point of installation. Suitable IP rated junction boxes should be used where required
- Remove the diffuser by removing the four screws using the Allen key provided (see Fig. 1)

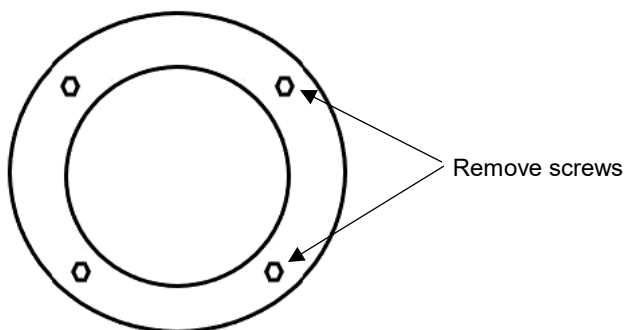


**Fig. 1**

- Mark the location of the fixing holes and drill the holes ensuring not to infringe with any gas / water pipes or electrical cables
- Feed the cable via the rubber grommet to retain IP rating and secure the baseplate to the surface
- Connect the Live (brown), Neutral (blue) and Earth (green/yellow) to the terminals on the terminal block of the chosen LED plate ensuring the cable is secured in the cable clamp (see Fig. 2)

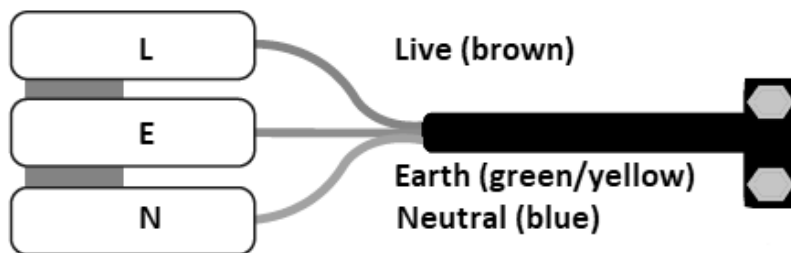

**Fig. 2**

- Ensure the earth lead on the LED plate is secured correctly to the earth lead on the body of the fitting
- Fasten the LED plate screws
- Choose the required colour temperature by means of the DIP switch (see Fig. 3)

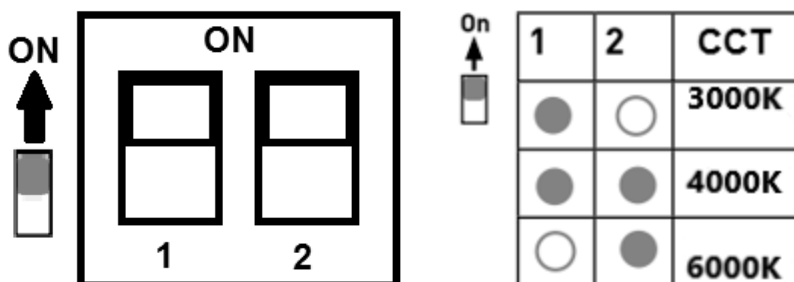

**Fig. 3**

- Reattach the diffuser and replace screws
- Switch on and check for correct operation

## WARNING

This product must be disconnected from the circuit if subjected to any high voltage or insulation resistance testing. Irreparable damage will occur if this instruction is not followed

## GENERAL

This product should be recycled in the correct manner when it reaches the end of its life. Check local authorities for where facilities exist

Clean with a soft dry cloth only, do not use aggressive cleaning products or solvents which may damage the product

This product is non-dimmable

## WARRANTY

This product has a warranty of 5 years from date of purchase. Failure to install this product in accordance with the current edition of the IEE Wiring Regulations, improper use, or removal of the batch code will invalidate the warranty. If this product should fail within its warranty period it should be returned to the place of purchase for a free of charge replacement. ML Accessories does not accept responsibility for any installation costs associated with the replacement product. Your statutory rights are not affected. ML Accessories reserve the right to alter product specification without prior notice