

Fig. 3

Removing from track

- Switch power off
- Make sure adapter adjustment knob and locking lever are set as per (Fig. 3A)
- Rotate locking lever clockwise (Fig. 3B)
- Remove adapter (Fig. 3C)

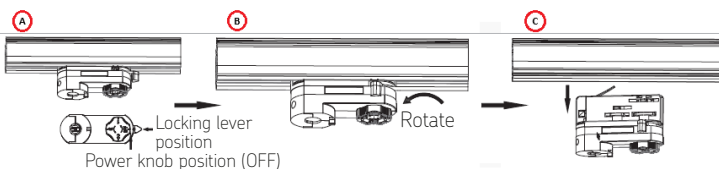


Fig. 3

WARNING

This product must be disconnected from the circuit if subjected to any high voltage or insulation resistance testing. Irreparable damage will occur if this instruction is not followed.

GENERAL

Clean with a soft dry cloth only, do not use aggressive cleaning products or solvents which may damage the product.

Do not use any source of high-pressure washers to maintain or clean this luminaire. This product is dimmable – dependant on bulb

This product should be recycled in the correct manner when it reaches the end of its life. Check local authorities for where facilities exist.

WARRANTY

This product has a warranty of 5 years from date of purchase. Failure to install this product in accordance with the current edition of the IEE Wiring Regulations (BS7671), improper use, or removal of the batch code will invalidate the warranty. If this product should fail within its warranty period, it should be returned to the place of purchase for a free of charge replacement. ML Accessories does not accept responsibility for any installation costs associated with the replacement product. Your statutory rights are not affected. ML Accessories reserve the right to alter product specification without prior notice.

SUPPLIED BY:

(UK) MANUFACTURER
ML ACCESSORIES LTD, UNIT E CHILTERN PARK,
 BOSCOMBE ROAD, DUNSTABLE LU5 4LT,
 WWW.MLACCESSORIES.CO.UK

(EU) AUTHORISED REPRESENTATIVE
SLV LIGHTING GROUP,
 DAIMLERSTRASSE 21-23,
 52531 ÜBACH-PALENBERG, GERMANY
EMAIL: EPREL@GROUP.SLV.COM

MADE IN CHINA

230V
50Hz

IP20



ML
ACCESSORIES LTD



CE **UK** **CA**



155

SM_JUL25_V1



GENERAL INSTRUCTIONS

These instructions should be read carefully and retained after installation by the end-user for future reference and maintenance.

These instructions should be used to aid the installation of the following products:

KLADBK / KLADW

SAFETY

- This product must be installed in accordance with the latest edition of the IEE Wiring Regulations (BS7671) and current Building Regulations. If in any doubt, consult a qualified electrician
- Please isolate mains prior to installation or maintenance
- Check the total load on the circuit (including when this luminaire is fitted) does not exceed the rating of the circuit cable, fuse, or circuit breaker
- Please note the IP (Ingress Protection) rating of this product when deciding the location for installation
- This product is for indoor use only
- These products are Class I and must be earthed
- This product is IP20 rated

INSTALLATION

- This Power adapter may be used for powering a pendant lamp or providing power to a 3-circuit track.
- Check it is compatible for the track (Fig. 2B)
- Power adapter is rated for maximum 250V at 16A however due to size limit of power cable (0.75mm²), **maximum of 6A @ 240V** can be drawn. Check load before use.

Supply/pendant cable assembly

- Remove back cover for access to supply terminals (Fig. 1).
- Remove outer insulation from power cable, check wires are long enough to reach screw.
- Remove 10-15mm of insulation from each wire and add ferrules on them.
- Fit cable securing accessories on cable and mount onto power adapter.
- Place each wire into correct terminals, observing polarity L – Live (brown), E – Earth (green/yellow), N – Neutral (blue). Tighten screws to maximum torque of 5kgf.cm
- Refit back cover.


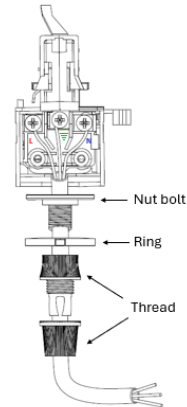


Fig. 1



Power Cable

1. Wire: 0.75mm², 18AWG
2. Screws assembly to withstand Torque: 5kgf.cm

Mounting onto track

- Check and make sure power knob and locking lever is set as per (Fig. 2A)
- Align adapter with track, make sure correct orientation and earth tab aligns with earth strip on track (Fig. 2B) before inserting into track.


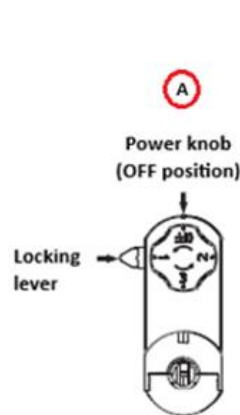


Fig. 2

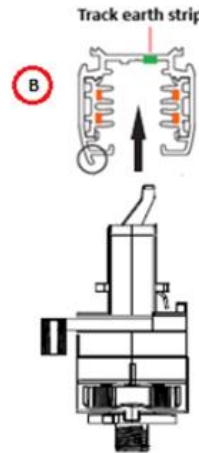

- Once adapter fully-in, turn securing lever anticlockwise until fully locks and adapter secure (Fig. 3B). Note: If lever very stiff or when fully turned adapter is still insecure, check orientation or it is compatible with track being used (Fig.2)
- Turn circuit adjustment knob (Fig. 3C) to required circuit (1,2 or 3).