

LIGHTING & WIRING ACCESSORIES

2026

CUSTOMER SERVICE

- QUOTES WITHIN 1 HOUR
- SAME DAY COLLECTION FROM OUR WAREHOUSE
- 5PM CUT OFF NEXT DAY DELIVERY (MON-THU) (3PM ON FRIDAYS)
- DELIVER DIRECT TO YOUR CUSTOMERS WITH K-DIRECT
- 98%* STOCK AVAILABILITY
- DEDICATED AREA MANAGERS FOR PERSONALISED SUPPORT
- EXPERT TECHNICAL SUPPORT FOR PRODUCT SELECTION AND SPECIFICATION
- EFFICIENT RETURNS AND REPLACEMENTS WITH MINIMAL DISRUPTION

ONLINE FEATURES

- LIVE CHAT
- LIVE STOCK AVAILABILITY
- MANAGE AND TRACK ORDERS
- CSV PRODUCT DATA DOWNLOAD
- ADDITIONAL DISCOUNT FOR ORDERING ONLINE
- DOWNLOADABLE DATASHEETS AND INSTALLATION GUIDES
- MOBILE-FRIENDLY PLATFORM FOR ORDERING ON THE GO
- INSTANT ACCESS TO INVOICES AND ACCOUNT DOCUMENTS ONLINE

OFFICE HOURS:

Mon-Thu: 8am to 5.30pm
Fri: 8am to 5pm
Closed on weekends

Tel: 01582 88 77 60
Enquiries: sales@mlaccessories.co.uk
Orders: orders@mlaccessories.co.uk
www.mlaccessories.co.uk



A Message from our CEO

I have spent my career in this industry, so I understand what the trade expects – products that work properly, are available when you need them, and are backed by people who know what they are talking about.

That is exactly what Knightsbridge is focused on delivering in 2026.

This catalogue represents a business built around practical, dependable solutions for electricians, installers, and wholesalers. Every product we supply is developed with real-world installation in mind – meeting the required standards, installing efficiently, and performing consistently on site.

Listening to the trade is central to how we operate. Feedback from customers directly influences how our ranges evolve, whether that is improving ease of installation, refining specifications, or ensuring our products remain reliable and compliant across applications.

Equally important is the service behind the product. Strong availability, clear technical information, and responsive customer support are fundamental to supporting the trade properly. We continue to invest in our operations, systems, and people to make sure Knightsbridge is a supplier you can depend on, day in and day out.

This catalogue is designed to be a working tool – straightforward, practical, and easy to use – reflecting a business that understands the pressures of the job and is committed to supporting the trade.

Thank you for choosing Knightsbridge.

Dave Dawkins
Chief Executive Officer

















CONTENTS

WIRING ACCESSORIES

Moulded Switches & Sockets
- Square Edge 6 - 15
- Curved Edge 16 - 37

Metal Decorative Switches & Sockets
- Rounded Edge 38 - 55
- Square Edge 56 - 71
- Flat Plate 72 - 93
- Screwless 94 - 135

Specialist Sockets 136 - 141
Metal Clad Switches & Sockets 142 - 157
Datacomms 158 - 167
Grid Wiring Accessories 168 - 177
Weatherproof 178 - 189
Wiring Basics 190 - 203
Industrial Switches & Sockets 204 -205
Wireless Door Chimes 206 - 207
Ventilation 208 - 211
Sensors 212 - 219

LIGHTING

Domestic Interior
- Downlights 222 - 249
- Ceiling & Wall Lights 250 - 273
- Bathroom 274 - 285
- Under Cabinet 286 - 293
- LED Flex 294 - 307

Outdoor Lighting
- Wall Lights 308 - 329
- Bollard Lighting 330 - 333
- Spike Lights 334 - 339
- Groundlights & Deck Lighting 340 - 349
- Floodlights 350 - 359

Commercial Lighting
- Bulkheads & Wall Packs 360 - 379
- Commercial Downlights 380 - 393
- Recessed, Surface, & Suspension Lighting 394 - 403
- Battens 404 - 413
- Non-Corrosive 414 - 421
- High & Low Bays 422 - 425

Emergency Lighting 426 - 439
Lamps & Lighting Accessories 440 - 451
Smart Home 452 - 459

INDEX 461 - 497

WIRING ACCESSORIES









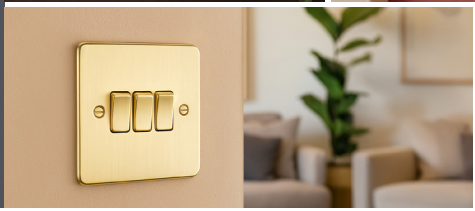



CONTENTS

MOULDED SWITCHES & SOCKETS
- Square Edge 6 - 15
- Curved Edge 16 - 37

METAL DECORATIVE SWITCHES & SOCKETS
- Rounded Edge 38 - 55
- Square Edge 56 - 71
- Flat Plate 72 - 93
- Screwless 94 - 135

SPECIALIST SOCKETS 136 - 141
METAL CLAD SWITCHES & SOCKETS 142 - 157
DATACOMMS 158 - 167
GRID WIRING ACCESSORIES 168 - 177
WEATHERPROOF 178 - 189
WIRING BASICS 190 - 203
INDUSTRIAL SWITCHES & SOCKETS 204 - 205
WIRELESS DOOR CHIMES 206 - 207
VENTILATION 208 - 211
SENSORS 212 - 219






USB CHARGER
5V ⎓ 3.1A (shared)




SHAVERS
ONLY
230V
5.0V ⎓ 2.4A

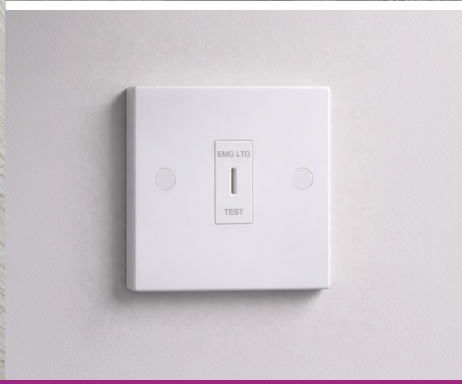
EMG LTG
TEST

MOULDED SWITCHES & SOCKETS

SQUARE EDGE

Comprehensive, all-purpose moulded switches and sockets

2G USB Sockets	9
2G Sockets | 1G Sockets | 5A Pin Socket	10
Shaver Sockets | Fan Isolator Switches	11
Switches | Dimmers | Dimming Modules	12 - 13
Fused Spur Units | Cooker Switches & Sockets	13 - 14
Media Outlets | Blanking Plates | Modular Frames	14
Pattress Boxes & Accessories	15

DOUBLE POLE SWITCHES

On selected products for additional safety

LASER PRINTING

All markings (where required) are applied with modern laser printing

ANTI-MICROBIAL

ISO2219:2011



LOW PROFILE DESIGN

Projection of just 9mm (including gasket)

SCREW CAP COVERS

Included as standard, for a clean, finished look

TOP-DOWN TERMINATION

L, N and E can all be terminated from the top – ideal when installing multiple outlets



CAPTIVE TERMINALS

Appropriate terminal capacities and captive terminals to prevent screws falling out

HIGH INTEGRITY EARTHING

Twin earth terminals where appropriate

25 YEAR WARRANTY*

*2 years on electronic products

DIMENSIONS*

Single plate: 86mm x 86mm
Double plate: 86mm x 146mm
Projection: 9mm

*Unless otherwise stated



13A 2G SP SWITCHED SOCKET WITH DUAL USB A+C (20V DC 2.25A) MAX. 45W





45W FAST CHARGE 12V ⎓ 1.5A QC 20V ⎓ 2.25A PD

CHARGES LAPTOPS

30W FAST CHARGE 20V DC 1.5A

- Charge small laptops and tablets at up to 45W from a single USB-C output
- Fast charge two devices at same time at up to 27W PD and 18W QC
- Twin Earths
- Dual USB A+C outputs
- Supports USB-PD and QC Charging protocols
- Over Voltage CAT III – Suitable for domestic and commercial installations
- Built in overheat and overload protection
- Minimum mounting box depth: 25mm

Code	Model	USB Config
SN9003	SP + Dual USB	A+C (20V DC 2.25A)
SN9930	DP + Dual USB	C+C (20V DC 1.5A)

13A 2G SP SWITCHED SOCKET WITH DUAL USB A+C (5V DC 4.8A SHARED) MAX. 24W



24W 5V DC 4.8A (SHARED)

- Outboard Rockers
- Dual USB A+C
- Twin Earths
- Minimum mounting box depth: 25mm

Code	Model	USB Config
SN9002	SP + Dual USB	A+C (5V DC 4.8A)

13A 2G SWITCHED SOCKET WITH DUAL USB (5V DC 3.1A SHARED) MAX. 15.5W



15.5W 5V DC 3.1A (SHARED)

- Double Pole
- Dual USB A+C
- Twin Earths
- Minimum mounting box depth: 25mm

Code	Model	USB Config
SN9931D	DP + Dual USB	A+C (5V DC 3.1A)

(USB-PD is supported by most Android phones and iPhone15 and above.)

13A 2G SOCKETS

- Minimum mounting box depth: 25mm

Code	Model
SN9000	Double Pole + Twin Earth
SN9000S	Single Pole + Twin Earth
SN9000U	Unswitched + Twin Earth
SN9001	Double Pole + Outboard Rockers + Twin Earth

***ASTA Diamond certified products:** SN9000, SN9000S



13A 2G SP SMART WI-FI SWITCHED SOCKET

- Minimum mounting box depth: 25-35mm (dependent on wiring conditions)
- Certified Works with Alexa and Google Assistant

Code	Model
SN9KW	Smart Wi-Fi + Twin Earth (Works with Alexa and Hey Google.)



works with alexa

Amazon, Alexa and all related logos are trademarks of Amazon.com, Inc. or its affiliates.

works with Google Home

Google and Google Home are trademarks of Google LLC.

works with Smart Life

13A 1G SOCKETS

- Minimum mounting box depth: 25mm

Code	Model
SN7000	Double Pole
SN7000S	Single Pole
SN7000U	Unswitched
SN9919D	DP + USB A+C (20V DC 1.1A)

***ASTA Diamond certified products:** SN7000, SN7000S



22W FAST CHARGE 20V DC 1.1A

10.5W 5V DC 2.1A

5A ROUND PIN SOCKET

- Minimum mounting box depth: 25mm

Code	Model
SN5U	Unswitched





DUAL USB SHAVER SOCKET

- 230VAC 20VA
- Built in dual USB A+C charger ideal for charging bat room accessories
- Minimum mounting box depth: 47mm



230V 50Hz **12W** 5V DC 2.4A (SHARED)

Code	Model
SN8909	USB A+C (5V DC 2.4A Shared) Max 12W

DUAL VOLTAGE SHAVER SOCKET

- Minimum mounting box depth: 47mm



115/ 230V

Code	Model
SN8900N	115/230V Dual Voltage Shaver Socket with Neon

10A FAN ISOLATOR SWITCH

- Triple Pole
- Rated conditional short circuit current (Inc.) 1500mA
- Minimum mounting box depth: 16mm



Code	Model
SN1100	Triple Pole

DECORATIVE, DIMMABLE AND FAN ISOLATOR PULL CORDS SEE PAGES 194-195



10AX SWITCHES

- Minimum mounting box depth: 16mm

Code	Size	Model	
SN127	1G	2-Way (Architrave)	
SN1200	1G	Intermediate	
SN1000	1G	1-Way	
SN2000	1G	2-Way	
SN3000	2G	2-Way	
SN4000	3G	2-Way	
SN4100	4G	2-Way	
SN4200	6G	2-Way	
SN1000DPK	1G	DP Key Switch	NEW
SN127R	1G	SP 2-way Retractive Architrave	NEW
SN2000K	1G	2-way Key Switch	NEW
SN2100	1G	SP 2-way Retractive	NEW



NEW

INTELLIGENT DIMMER

- 5-400W (5-150W LED)
- 2-way
- Push On/Off, rotary dimming action
- Switch between Trailing-edge and Leading-edge modes, making this a highly compatible dimmer solution

Code	Size	Model	
SN2191	1G	2-Way	NEW
SN2192	2G	2-Way	NEW

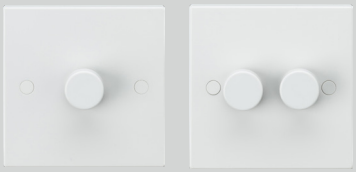

DIMMER MODULES & UNPOPULATED PLATES

- 2-Way
- Intelligent options that switch between Trailing-edge and Leading-edge modes, making this a highly compatible dimmer solution (VFR200I, CU150I)
- 1-10V option for dimmable ballast or LED drivers with 1-10V DC control input (CU110V)
- Minimum mounting box depth: 35mm

Code	Max. Load	Mode
SN400M	40-400W (3-100W LED)	Leading Edge
VFR200I	10-200W (5-150W LED)	Intelligent Trailing/Leading Edge
CU110V	6A 2-Way	1-10V*
CU150I	5-400W (5-150W LED)	Intelligent Trailing/Leading Edge*

* Dimmer supplied with Curved Edge Grid Adaptor Plate



Code	Size	Mode
SN1DIM	1G	Plate and Cap Only
SN2DIM	2G	Plate and Cap Only
SN3DIM	3G	Plate and Cap Only
SN4DIM	4G	Plate and Cap Only



LEADING EDGE DIMMERS

- 2-way
- 40-400W (3-100W LED)
- Minimum mounting box depth: 25mm




Code	Size	Model
SN2161	1G	2-Way
SN2162	2G	2-Way

20A SWITCHES

- Double pole switches (where applicable)
- Minimum mounting box depth: 25mm





Code	Model
SN8341	Switched + Flex Outlet (From Base)
SN8341N	Switched + Neon + Flex Outlet (From Base)
SN8342	Flex Outlet Plate (From Base or Centre)

32A SWITCHES

- Double Pole
- Minimum Mounting box depth: 25mm



Code	Model	
SN8345NF	Switch with Neon and Flex Outlet (From Base)	**NEW**

FUSED SPUR UNITS

- Double pole switches (where applicable)
- Minimum mounting box depth: 25mm
- Flex outlet from base







Code	Model
SN6000	Unswitched
SN6000-3A	Unswitched (3A Rated)
SN6000N	Unswitched + Neon
SN6300	Switched
SN6300N	Switched + Neon

45A COOKER SWITCHES

- Double pole switches
- Minimum mounting box depth: 47mm






Code	Size	Model
SN8331	Single	Switched
SN8331N	Single	Switched + Neon
SN8331W	Single	Switched (White Rocker)
SN8331NW	Single	Switched + Neon (White Rocker)
SN8340	Single	Cooker Connection Unit

45A COOKER SWITCHES

- Double pole switches
- Minimum mounting box depth: 47mm

Code	Size	Model
SN8332	Double	Switched
SN8332N	Double	Switched + Neon
SN8332W	Double	Switched (White Rocker)
SN8332NW	Double	Switched + Neon (White Rocker)

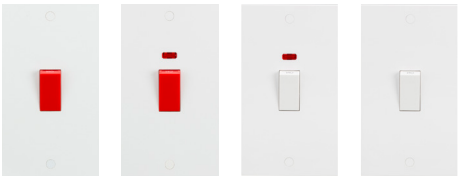

45A COOKER SWITCH & SOCKET

- Double pole switch
- 13A switched socket
- Minimum mounting box depth: 47mm

Code	Model
SN8333	Switched
SN8333N	Switched + Neon
SN8333W	Switched (White Rocker)
SN8333NW	Switched + Neon (White Rocker)

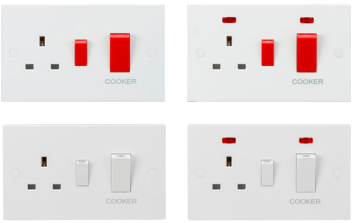

MEDIA OUTLETS & BLANKING PLATES

- Minimum mounting box depth: 25mm

Code	Model
SN7300	Telephone Socket - Master
SN0100	Single TV Outlet - Non-Isolated
SN0140	TV and SAT TV Outlet - Non-Isolated
SN8350	1G Blanking Plate
SN8360	2G Blanking Plate

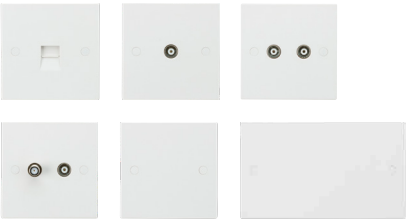

MODULAR FRAMES

- For use with 25mm x 50mm or 50mm x 50mm euro modules

Code	Model
NET1GWH	1 Module
NET2GWH	1 - 2 Modules
NET4GWH	2 - 4 Modules

PATTRESS BOXES

- Surface mount boxes for use with Square Edge range

Code	Size	Model	Qty
SN1300	Single	16mm + Earth Terminal	10
SN1400	Single	25mm	10
SN1700	Single	35mm + Earth Terminal	10
SN1610	Single	47mm + Earth Terminal and Cable Clamp	10
SN127P		16mm + Earth Terminal (Architrave)	10
SN1500	Double	25mm	5
SN1800	Double	35mm + Earth Terminal	5
SN1510	Double	35mm Dual + Earth Terminals	5
SN1600	Double	47mm + Earth Terminal and Cable Clamp	5



PVC SURFACE MOUNT BOXES

- Durable high impact PVC construction
- Trunking knock-out entries (top bottom and centre)
- 29mmm internal depth, 32mm overall height



Code	Size	Model	Qty
SN1400P	Single	Internal Depth 29mm	10
SN1500P	Double	Internal Depth 29mm	5

ACCESSORIES

- Screws, Cap Covers and Extension Studs



Code	Model	Qty
CSCREW35	35mm M3.5 - Raised Head	100
CSCREW50	50mm M3.5 - Raised Head	100
CSCREW75	75mm M3.5 - Raised Head	100
CAPCOVERS	Screw Cap Covers	100
CSCREW35EXT	35mm Extension Stud	10


FASTCHARGE
20V 3.25A PD
access to history
SECOND EDITION
Rebellion and Disorder under the Tudors
OCR AS/A-level History DEMOCRACY AND DICTATORSHIPS
OCR A-level History REBELLION AND DISORDER UNDER THE
SAUL
THE OXFORD









MOULDED SWITCHES & SOCKETS

CURVED EDGE

White moulded switches and sockets with gently contoured 7mm plates and soft edges

13A Sockets RCD | Fused Spur | DP Key Lockable	19
2G USB Sockets | Night-light Socket	20 - 21
Smart Sockets | 5A Round Pin Socket	22
Dimmers | Dimming Modules	23
10AX Switches | Switch Modules	24
Illuminated Light Switch	25
Shaver Socket | Key Card Switch | Flex Outlet Plate	26
Cooker Switches | Fused Spur Units	27
Media Outlets | Pattress Boxes	28
Multimedia Combination Plates | Modular Frames	29
Grid Wiring Accessories	30 - 32
Part M	34 - 37

DOUBLE POLE SWITCHES

On selected products for additional safety

LASER PRINTING

All markings (where required) are applied with modern laser printing

ANTI-MICROBIAL

ISO2219:2011



LOW PROFILE DESIGN

Projection of just 9mm (including gasket)

SCREW CAP COVERS

Included as standard, for a clean, finished look

TOP-DOWN TERMINATION

L, N and E can all be terminated from the top – ideal when installing multiple outlets



CAPTIVE TERMINALS

Appropriate terminal capacities and captive terminals to prevent screws falling out

HIGH INTEGRITY EARTHING

Twin earth terminals where appropriate

25 YEAR WARRANTY*

*2 years on electronic products

DIMENSIONS*

Single plate: 86mm x 86mm
Double plate: 86mm x 146mm
Projection: 7mm

*Unless otherwise stated

13A 2G SOCKETS

- Minimum mounting box depth: 25mm

Code	Model
CU9000*	DP + Twin Earth
CU9000S*	SP + Twin Earth
CU9000U	Unswitched + Twin Earth
CU9001	DP + Twin Earth (Outboard Rockers)

***ASTA Diamond certified products:** CU9000, CU9000S

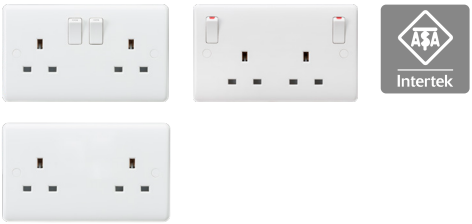

13A 1G SOCKETS

- Minimum mounting box depth: 25mm

Code	Model
CU7000*	Double Pole
CU7000S*	Single Pole
CU7000U	Unswitched
CU9919D	DP + USB A+C (20V DC 1.1A)

***ASTA Diamond certified products:** CU7000, CU7000S



13A RCD SOCKET & FUSED SPUR

Type A RCD for AC residual current and pulsating DC up to 6 mA. Suitable for equipment with electronic components like IT equipment.

Passive (latching) type, which will automatically reset after a power outage, without the need for manual resetting.

- Tripping current: 30mA
- Trip time: 40ms
- Double Pole RCD contact break
- Minimum mounting box depth: 35mm

Code	Model
CU6RCD	RCD Fused Spur - 30mA (Type-A)
CU9RCD	DP RCD Switched Socket - 30mA (Type-A)



DP LOCKABLE SOCKET & SWITCH

- Key lock On or Off (incl. 2 keys)
- Designed to restrict unauthorized use
- Minimum mounting box depth: 35mm

Code	Model
CU8341L	20A DP Lockable Switch
CU9LOCKN	13A DP Lockable Socket with Neon





13A 2G SP SWITCHED SOCKET WITH DUAL USB-C 20V DC 3.25A MAX. 65W



65W DUAL FAST CHARGE [20V DC 3.25A]

CHARGES LAPTOPS

- Charge laptops at up to 65W from a single USB-C output
- Fast charge two devices at same time at up to 45W PD and 18W QC
- Outboard Rockers
- Twin Earths
- Dual USB-C Outputs
- Supports USB-PD and PPS Charging protocols
- Over Voltage CAT III – Suitable for domestic and commercial installations
- Built in overheat and overload protection
- Minimum mounting box depth: 25-35mm depending on wiring conditions

Code	Model	USB Config
CU9965	SP + Dual USB-C	C+C (20V DC 3.25A)

13A 2G SP SWITCHED SOCKET WITH DUAL USB A+C (20V DC 2.25A) MAX. 45W



45W DUAL FAST CHARGE [20V⎓2.25A PD]

- Charge small laptops and tablets at up to 45W from a single USB-C output
- Fast charge two devices at same time at up to 27W PD and 18W QC
- Twin Earths
- Dual USB A+C outputs
- Supports USB-PD and QC Charging protocols
- Over Voltage CAT III – Suitable for domestic and commercial installations
- Built in overheat and overload protection
- Minimum mounting box depth: 25-35mm depending on wiring conditions

Code	Model	USB Config
CU9003	SP + Dual USB	A+C (20V DC 2.25A)

(USB-PD is supported by most Android phones and iPhone15 and above.)

NEW 2-IN-1 240W USB CHARGING CABLES
SEE PAGE 167



13A 2G DP SOCKET WITH DUAL USB C+C (20V DC 1.5A) MAX. 30W



30W FAST CHARGE 20V DC 1.5A

- Double Pole switches
- Capable of delivering up to 30W over USB-C ideal for charging smartphones, tablets, and laptops
- Supports USB-PD/QC
- Twin Earthing points for high integrity earthing requirements
- Minimum mounting box depth: 25mm

Code	Model	USB Config
CU9930	DP + Dual USB	C+C (20V DC 1.5A)

13A 2G SWITCHED SOCKET WITH DUAL USB (5V DC 4.8A SHARED) MAX. 24W





24W 5V DC 4.8A (SHARED)

- Twin Earths
- Minimum mounting box depth: 25mm

Code	Model	USB Config
CU9002	SP + Dual USB	A+C (5V DC 4.8A)
CU9948	DP + Dual USB	A+A (5V DC 4.8A)

13A 2G SWITCHED SOCKET WITH DUAL USB (5V DC 3.1A SHARED) MAX. 15.5W



15.5W 5V DC 3.1A (SHARED)

- Double Pole
- Dual USB A+C
- Twin Earths
- Minimum mounting box depth: 25mm

Code	Model	USB Config
CU9931D	DP + Dual USB	A+C (5V DC 3.1A)



13A 2G NIGHTLIGHT SOCKET



- Built in Photocell Nightlight Function
- Off during the Day On during the night
- ON 5-15Lx / OFF more than 20-40Lx
- Minimum mounting box depth: 25mm

Code	Model
CU9NL	DP + Nightlight Function

AVAILABLE IN DECORATIVE OPTIONS (SEE PAGE 104)



13A 2G SP SMART WI-FI SWITCHED SOCKET

- Minimum mounting box depth: 25mm
- Certified Works with Alexa and Google



WI-FI | ENERGY MONITORING FUNCTION | POWER MONITORING KWh

Code	Model
CU9KW	Smart Wi-Fi + Twin Earth (Works with Alexa and Hey Google.)

works with alexa

Amazon, Alexa and all related logos are trademarks of Amazon.com, Inc. or its affiliates.

works with Google Home

Google and Google Home are trademarks of Google LLC.

works with Smart Life

13A 2G REMOTE CONTROLLED SOCKET

- Range of up to 30m (dependent on environment)
- RF 433 MHz
- Minimum mounting box depth: 25mm



REMOTE CONTROL

Code	Size	Model
CU9R	2G	Remote Control Socket with Key Fob

5A ROUND PIN SOCKET

- Minimum mounting box depth: 25mm



Code	Model
CU5U	Unswitched

NEW

INTELLIGENT DIMMER

- 5-400W (5-150W LED)
- 2-way
- Push On/Off, rotary dimming action
- Switch between Trailing-edge and Leading-edge modes, making this a highly compatible dimmer solution
- Minimum mounting box depth: 25mm

Code	Size	Model	
CU2191	1G	2-Way	**NEW**
CU2192	2G	2-Way	**NEW**
CU2193	3G	2-Way	**NEW**
CU2194	4G	2-Way	**NEW**

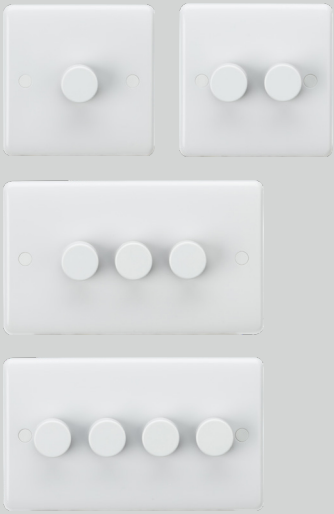

LEADING EDGE DIMMERS

- 2-Way
- 40-400W (3-100W LED)
- Minimum mounting box depth: 25mm

Code	Size	Model
CU2161	1G	2-Way
CU2162	2G	2-Way
CU2163	3G	2-Way
CU2164	4G	2-Way

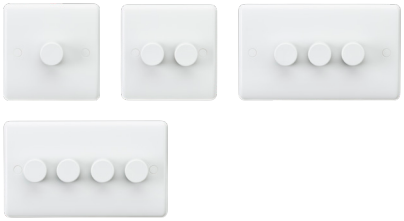

DIMMER MODULES & UNPOPULATED PLATES

- 2-Way
- Intelligent options that switch between Trailing-edge and Leading-edge modes, making this a highly compatible dimmer solution (VFR200I, CU150I)
- 1-10V option for dimmable ballast or LED drivers with 1-10V DC control input (CU110V)
- Minimum mounting box depth: 35mm

Code	Max. Load	Mode
SN400M	40-400W (3-100W LED)	Leading Edge
VFR200I	10-200W (5-150W LED)	Intelligent Trailing/Leading Edge
CU110V	6A 2-Way	1-10V*
CU150I	5-400W (5-150W LED)	Intelligent Trailing/Leading Edge*

* Dimmer supplied with Curved Edge Grid Adaptor Plate



Build your own dimmer solution with our unpopulated dimmer plates

Code	Size	Model	Code	Size	Model
CU1DIM	1G	Plate and Cap Only	CU3DIM	3G	Plate and Cap Only
CU2DIM	2G	Plate and Cap Only	CU4DIM	4G	Plate and Cap Only

10AX SWITCHES

- Minimum mounting box depth: 16mm (unless otherwise specified)

* Minimum Mounting Depth: 25mm

Code	Size	Model	
CU1000	1G	1-Way	
CU2000	1G	2-Way	
CU2W	1G	2-Way (Wide Rocker)	
CU2000K	1G	SP Key Switch	NEW
CU2100	1G	SP Retractive Switch "PRESS"	NEW
CU1200	1G	Intermediate	
CU12W	1G	Intermediate (Wide Rocker)	
CU1000DP	1G	DP Switch	
CU1DPW	1G	DP Switch (Wide Rocker)	
CU1000DPK	1G	10AX DP Key Switch "EMG LTG TEST"	NEW
CU3000	2G	2-Way	
CU3W	2G	2-Way (Wide Rocker)	
CU4000	3G	2-Way	
CU4W	3G	2-Way (Wide Rocker)	
CU4101	4G	2-Way (Single Plate)*	
CU4100	4G	2-Way	
CU4200	6G	2-Way	
CU1100	1G	Triple Pole Fan Isolator	

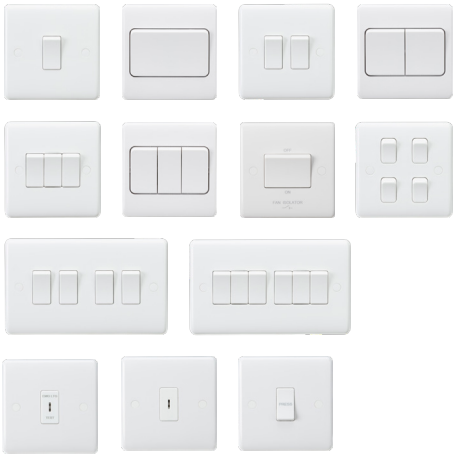

10AX INTERCHANGEABLE SWITCH MODULES

- These modules allow for you to swap out an existing 2-way switch module and replace it with an alternative option
- Handy on site when you don't know what might be required
- Compatible with 10AX switches - CU2000, CU3000, CU4000, CU4100 and CU4200

Code	Size	Model	
CU1200M	1G	Intermediate Switch Module	
CU2100M	1G	SP Retractive Switch Module	NEW



HOW IT WORKS



1. Need to convert one of our switches to an intermediate or retractive switch



2. Simply remove the 2-way module you want to replace



3. Install the intermediate or retractive switch module in its place



NEW

1G LIGHT SWITCH ILLUMINATOR

- Creates "halo" glow effect behind switches when light is in the OFF position making it easier to find the light switch in Hotel rooms, bedrooms, storage rooms.
- This device is designed to fit behind most standard 86x86mm size 1G/2G/3G single plate switches and functions with both 1-way, 2-way, and DP switches it can also be used with single sockets if desired.
- This devices fits behind and works with ALL Knightsbridge 1G Switches from our moulded and decorative ranges

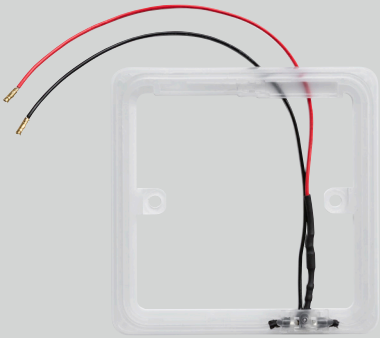

Code	Size	Colour Temp	Colour	
1GHALO	1G	3000K	Warm White	**NEW**

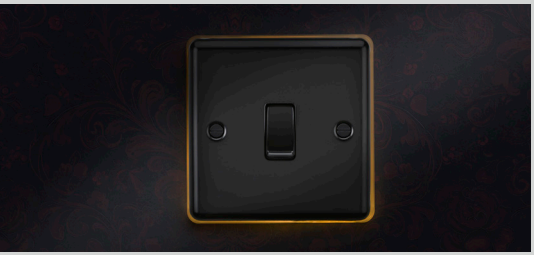





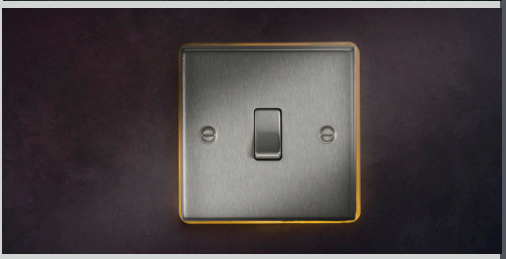

COMPATIBLE WITH OUR FULL DECORATIVE RANGE



230V SHAVER SOCKET WITH DUAL USB A+C (5V DC 2.4A) Max. 12W

- 230VAC 20VA
- Built in dual USB A+C charger ideal for charging bathroom accessories
- Minimum mounting box depth: 47mm



230V 50Hz

12W 5V DC 2.4A (SHARED)

Code	Model
CU8909	USB A+C (5V DC 2.4A Shared, Max 12W)

DUAL VOLTAGE SHAVER SOCKET

- Minimum mounting box depth: 47mm



115/ 230V

Code	Model
CU8900N	20VA 115/230V + Neon

20A SWITCHES & FLEX OUTLET PLATE

- Double pole switches (where applicable)
- Minimum mounting box depth: 25mm



Code	Model	
CU8341	Switched	
CU8341N	Switched + Neon	
CU8341NF	DP Switch with Neon and Flex Outlet from base (10mm Plate)	NEW
CU8342	Flex Outlet Plate (From Base or Centre)	

32A KEY CARD & DP SWITCHES

- 32A rated
- Back light arrow to aid activation in dark room (CUCARD only)
- Minimum mounting box: 47mm



Code	Model	
CUCARD	32A 1G Key Card Switch	
CU8345NF	DP Switch with Neon and Flex Outlet (From Base)	NEW

45A COOKER SWITCHES

- Double pole switches
- Minimum mounting box depth: 47mm



Code	Size	Model
CU8331	Single	Switched
CU8331W	Single	Switched (White Rocker)
CU8331N	Single	Switched + Neon
CU8331NW	Single	Switched + Neon (White Rocker)
CU8340	Single	Cooker Connection Unit

45A COOKER SWITCHES

- Double pole switches
- Minimum mounting box depth: 47mm



Code	Size	Model
CU8332	Double	Switched
CU8332W	Double	Switched (White Rocker)
CU8332N	Double	Switched + Neon
CU8332NW	Double	Switched + Neon (White Rocker)

45A COOKER SWITCHES & SOCKETS

- Double pole switches
- 13A switched socket
- Minimum mounting box depth: 47mm

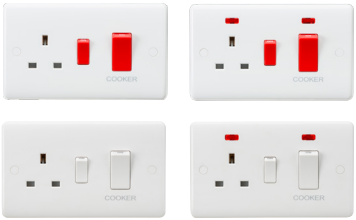

Code	Model
CU8333	Switched
CU8333W	Switched (White Rocker)
CU8333N	Switched + Neon
CU8333NW	Switched + Neon (White Rocker)

FUSED SPUR UNITS

- 13A rated (where applicable)
- Double pole switches (where applicable)
- Minimum mounting box depth: 25mm



Code	Model
CU6000	Unswitched
CU6000-3A	Unswitched (3A Fused)
CU6000N	Unswitched + Neon
CU6000NF	Unswitched + Neon + Flex Outlet (10mm Plate)
CU6300	Switched
CU6300N	Switched + Neon
CU6300NF	Switched + Neon + Flex Outlet (10mm Plate)
CU6300F	Switched + Flex Outlet From Base (10mm Plate)

MEDIA OUTLETS & BLANKING PLATES

- Minimum mounting box depth: 25mm

Code	Size	Model
CU7300	1G	Telephone Socket - Master
CU7400	1G	Telephone Socket - Extension
CU0100	1G	Single TV Outlet - Non-Isolated
CU0110	1G	Twin TV Outlet - Non-Isolated
CU0120	1G	Single TV Outlet - Isolated
CU0150	1G	SAT TV Outlet - Non-Isolated
CU0140	1G	TV and SAT TV Outlet Non-Isolated
CU8350	1G	Blanking Plate
CU8360	2G	Blanking Plate



PATTRESS BOXES

- Surface mount box solutions for use with Curved Edge Range

Code	Size	Model	Qty
CU1300	Single	16mm + Earth Terminal	10
CU1400	Single	25mm	10
CU1700	Single	35mm + Earth Terminal	10
CU1610	Single	47mm + Earth Terminal and Cable Clamp	10
CU1500	Double	25mm	5
CU1800	Double	35mm + Earth Terminal	5
CU1600	Double	47mm + Earth Terminal and Cable Clamp	5

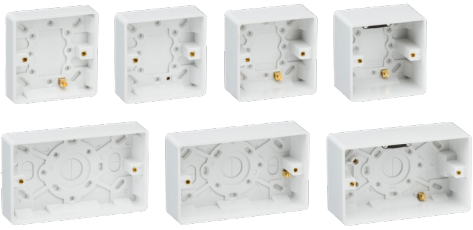

ACCESSORIES

- Screws and Cap Covers

Code	Model	Qty
CSCREW35	35mm M3.5 - Raised Head	100
CSCREW50	50mm M3.5 - Raised Head	100
CSCREW75	75mm M3.5 - Raised Head	100
CAPCOVERS	Screw Cap Covers	100
CSCREW35EXT	M3.5 x 35mm Extension Stud	10





*Modular inserts not included

CU298MM

Essential for any major upgrade, renovation, or new build. The Curved Edge multimedia combination plate allows for a power and bespoke signal distribution solution to be combined in one area.

Compatible with our extensive range of modular inserts, this plate can be configured to suit your requirements, be it satellite, TV, DAB, telecoms, networking, or even USB charging.

13A LARGE MULTIMEDIA COMBINATION PLATE

- Double pole switches
- 2 x 2G double sockets with twin earth
- Space for up to 8 x euro module inserts (25mm x 50mm)
- Dimensions: (H) 175mm x (W) 295mm x (P) 7mm
- Minimum mounting box depth: 47mm

Code	Model
CU298MM	Large Multimedia Plate
GSK298MM	Back Box (Large Multimedia Plate)



13A SMALL MULTIMEDIA COMBINATION PLATE

- Double pole switches
- 1 x 2G double socket with twin earth
- Space for up to 4 x euro module inserts (25 x 50mm)
- Dimensions: (H) 175mm x (W) 148mm x (P) 7mm
- Minimum mounting box depth: 47mm

Code	Model
CU194MM	Small Multimedia Plate
GSK194MM	Back Box (Small Multimedia Plate)



MODULAR FRAMES

- Used to house euro-module inserts to create bespoke TV/SAT/HDMI/USB solutions

Code	Model
CU1G	1 Module
CU2G	1 - 2 Modules
CU4G	2 - 4 Modules



MODULAR INSERTS AVAILABLE SEE PAGES 160-164



GRID FACEPLATES

- Requires grid mounting frame (sold separately)
- For use with Curved grid accessories only

Code	Model	Finish
CUG1	1G	White
CUG2	2G	White
CUG3	3G	White
CUG4	4G	White
CUG6	6G	White
CUG8	8G	White
CUG12	12G	White
PMG1	1G	Part M
PMG2	2G	Part M
PMG3	3G	Part M
PMG4	4G	Part M
PMG6	6G	Part M
PMG8	8G	Part M

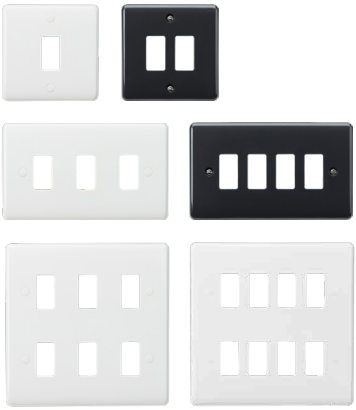

GRID MOUNTING FRAMES / SPARE SCREWS

- For use with Curved Edge grid faceplates
- Mounting screws pre-fitted

Code	Model
CUG1F	1-2G
CUG2F	3-4G
GRIDCAPCOVERS	Spare screw cap covers for grid faceplates
CSCREWM3	Spare M3 x 6mm grid faceplate screws



20AX GRID SWITCH MODULES

- For use with Curved Edge grid faceplates only

Code	Model
CUGM1	1-Way SP
CUGM2	2-Way SP
CUGM3	2-Way SP (Centre-Off)
CUGM4	Intermediate
CUGM5	2-Way SP Retractive (Marked "PRESS")
CUGM6N	20AX DP switch module with neon
CUGM6	DP
CUGM23	2-Way SP Retractive (Centre-Off)
CUGM19	10A Fan Isolator module
CUGM19K	10A Fan Isolator Key Switch Module



20AX GRID KEY SWITCH MODULES

- Supplied with test key



Code	Model
CUGM7	2-Way SP
CUGM8	DP
CUGM9	2-Way SP (Marked "EMG LTG TEST")
CUGM10	DP (Marked "EMG LTG TEST")
GDKEY	Spare Key

20AX GRID TOGGLE SWITCH MODULES

- For use with Curved Edge grid faceplates only



Code	Model
CUGM2TOG	2-Way SP
CUGM4TOG	Intermediate
CUGM6TOG	DP

GRID DIMMERS

- For use with Curved Edge grid faceplates only



Code	Model	
CUGMDS	6A Dummy Dimmer Switch	
CU150I	5-400W (5-150W LED) 2-way Intelligent Dimmer Module (Grid or Plate Mounting)	**NEW**
CU110V	6AX 2-way 1-10V Dimmer Module	**NEW**

MISCELLANEOUS GRID MODULES

- For use with Curved Edge grid faceplates only



Code	Model
CUGM15	Fuse Holder (13A)
CUGM16	Flex Outlet (max. 10mm)
CUGM17	Blank
CUGM13	Indicator - Red
CUGM12	Indicator - Orange
CUGM11	Indicator - Green
CUGMUSB	USB A+C (20V DC 1.1A)

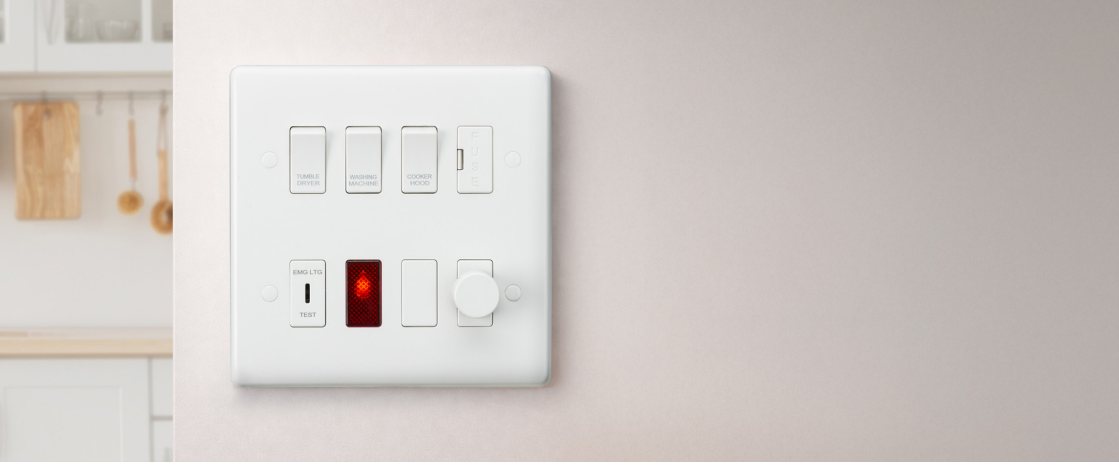

GRID ROCKER COVERS

- Replace an existing rocker with a laser printed version identifying the appliance it refers to

Code	Model
CUBOIL	Boiler
CUCOFF	Coffee Machine
CUHOOD	Cooker Hood
CUDISH	Dishwasher
CUFAN	Fan
CUBOOST	Fan Boost
CUFREEZER	Freezer
CUFRIDGE	Fridge
CUFRID	Fridge Freezer
CUHOB	Hob
CUMICRO	Microwave
CUOVEN	Oven
CUDRY	Tumble Dryer
CUWARM	Warming Drawer
CUWASH	Washing Machine
CUWASTE	Waste Disposal
CUWINE	Wine Cooler



DISCOVER OUR DECORATIVE METAL GRID SYSTEMS
SEE PAGES 168-177



Knightsbridge

COMMITTED TO A BRIGHTER FUTURE

CARD PACKAGING
88%
MADE FROM RECYCLED MATERIAL

PLASTIC PACKAGING
90%
MADE FROM RECYCLED MATERIAL

ALL PACKAGING
100%
MADE FROM RECYCLEABLE MATERIAL



FSC
www.fsc.org
FSC® N003061
The mark of responsible forestry

At Knightsbridge, we believe in looking after our customers and looking after our planet. This philosophy is important to us and is why we apply it to the way we package and present our products.

We are now working in conjunction with the FSC® moving towards 100% recyclable / 100% recycled packaging solutions. Look out for the FSC® label on our certified packaging.

This is our plan, this is our commitment to a brighter future.

FSC
FORESTS FOR ALL FOREVER™

ENVIRONMENTALLY APPROPRIATE
forest management ensures that the harvest of timber and non-timber products maintains the forest's biodiversity, productivity, and ecological processes.

SOCIALLY BENEFICIAL
forest management helps both local people and society at large to enjoy long term benefits and also provides strong incentives to local people to sustain the forest resources and adhere to long-term management plans.

ECONOMICALLY VIABLE
forest management means that forest operations are structured and managed so as to be sufficiently profitable, without generating financial profit at the expense of the forest resource, the ecosystem, or affected communities.

PART M Range

ON INDICATOR
Where required for additional safety

LASER PRINTING
All markings (where required) are applied with modern laser printing

ANTI-MICROBIAL
ISO22196:2011



LOW PROFILE DESIGN
Projection of just 7mm

TOP-DOWN TERMINATION
L, N, and E can all be terminated from the top – ideal when installing multiple outlets

Part M Building Regulations focus on the importance of access to and the use of buildings.

The regulations stipulate that it is a legal requirement to provide easy access for all visitors, including those with disabilities, who are working, visiting or residing in the following spaces:

1. A non-domestic building or a dwelling that is newly erected
2. An existing non-domestic building that is extended or undergoes a material alteration
3. An existing building or part of an existing building that undergoes a material change of use to a hotel or boarding house, institution, public building, or shop

Where wiring accessories are concerned, the following factors must be adhered to:

4.3 M - Requirement for switches to visually contrast with their surroundings
4.3 H - Requirement for wide rocker switch solutions (for use in communal areas)
4.3 K - Requirement for switched sockets to indicate whether they are “ON”
4.3 I - Requirement for pull cord switches to have visually contrasting cord and bangle
4.3 L - Requirement for mains and circuit isolators to clearly indicate they are “ON”

The Curved Edge range is the ideal foundation for this category as it is compatible with Datacomms modular inserts and the Curved Grid Accessories (found on page 24).

25 YEAR WARRANTY*

*2 years on electronic products

DIMENSIONS*

Single plate: 86mm x 86mm
Double plate: 86mm x 146mm
Projection: 7mm

*Unless otherwise stated

13A 2G SOCKETS




- Outboard Rockers
- Twin Earthing points for high integrity earthing requirements
- Minimum mounting box depth: 25mm

Code	Model
PM9001	2G DP Switched socket (outboard rocker model)
PM9001N	2G DP Switched socket with neon (outboard rocker model)

13A 2G SWITCHED SOCKET WITH USB



24W
5V DC 4.8A (SHARED)

- Outboard Rockers
- Twin Earthing points for high integrity earthing requirements
- Minimum mounting box depth: 25-35mm depending on wiring conditions

Code	Model
PM9002	2G DP Switched socket with dual USB A+C (5V DC 4.8A) (outboard rocker model)

13A RCD SOCKET & FUSED SPUR




30mA
RCD TYPE-A LATCHING

Type A RCD for AC residual current and pulsating DC up to 6 mA. Suitable for equipment with electronic components like IT equipment.

Passive (latching) type, which will automatically reset after a power outage, without the need for manual resetting.

- Tripping current (IΔn): 30mA
- Trip time @ IΔn: 40ms
- Outboard rockers
- Minimum mounting box depth: 35mm

Code	Model
PM9RCD	2G DP RCD Switched socket
PM6RCD	13A RCD Fused Spur (Type-A)

13A 1G SWITCHED SOCKETS



- Minimum mounting box depth: 25mm

Code	Model
PM7000	1G DP Switched socket
PM7000N	1G DP Switched socket with neon

10AX FAN ISOLATOR SWITCH



- A solution for this can be created using Grid the following codes

Code	Model
PMG1+ CUG1F+ CUGM19	10A Triple Pole



10AX WIDE ROCKER SWITCHES

- Wide Rocker Screwless Design
- Minimum mounting box depth: 16mm



Code	Model
PM2W	10AX 1G 2-way Wide Rocker Switch
PM3W	10AX 2G 2-way Wide Rocker Switch
PM4W	10AX 3G 2-way Wide Rocker Switch]
PM12W	10AX 1G Intermediate Wide Rocker Switch
PM1DPW	10AX 1G DP Wide Rocker Switch

10AX SWITCHES

- Minimum mounting box depth: 16mm (unless otherwise specified)



Code	Model
PM2000	10AX 1G 2-Way switch
PM3000	10AX 2G 2-Way switch
PM4000	10AX 3G 2-Way switch

13A FUSED SPUR UNITS

- Minimum mounting box depth: 25mm
- Double Pole switches (where applicable)



Code	Model
PM6300	13A Switched fused spur
PM6300N	13A Switched fused spur with neon
PM6300NF	13A Switched fused spur with neon & flex outlet

20A SWITCHES

- Minimum mounting box depth: 25mm



Code	Model
PM8341N	20A 1G DP Switch with neon

45A COOKER SWITCHES

- Minimum mounting box depth: 25mm



Code	Model
PM8331N	45A 1G DP Switch with neon
PM8333N	45A DP Switch & 13A socket with neons

MODULAR FACEPLATES

- For use with euromodule inserts 25x50mm and 50x50mm



Code	Model
PM1G	1G Modular faceplate
PM2G	2G Modular faceplate
PM4G	4G Modular faceplate

10AX PULL CORD SWITCH

- With Grey Bangle and Cord



Code	Model
PM8300	2-Way Pull Cord Switch with Grey Cord and Bangle

45A PULL CORD SWITCH

- With Grey Bangle and Cord
- Mechanical On/Off Indicator
- Neon indicator



Code	Model
PM8310N	DP Pull Cord Switch with Grey Cord and Bangle

RED EMERGENCY CORD KIT

- For use with emergency alarm systems
- 3m PVC cord (cut to size) - waterproof and wipe clean reduces risk of contamination
- Includes two triangular red bangles + Joint union
- One bangle should be set at 100mm from floor the other between 800-1000mm from floor for easy access



Code	Model
PMCORDR	2 x Red Bangle and Plastic Cord


SHAVERS
230V
5.0V ⎓ 2.4A
ONLY


COOKER







METAL DECORATIVE
SWITCHES & SOCKETS

ROUNDED EDGE

Metal decorative switches and sockets with a contemporary rounded edge design

1G | 2G USB Sockets	42 - 43
1G | 2G Switched Sockets	44 - 45
Shaver Sockets | USB Shaver Sockets | Round Pin Sockets	46
Switches | Fan Isolator Switches	47
10AX Switches	48
Dimmers | Dimming Modules	49 - 50
Fused Spur Units	51
45A Switches | 20A/45A Switches	52
Cookers Switches | Telephone Switches | CAT5E Network	53 - 54
Media Outlets | Blanking Plates	54
Modular Frames	55

DOUBLE POLE SWITCHES

On selected products for additional safety

COLOUR MATCHING

Matching metal rockers with no surround

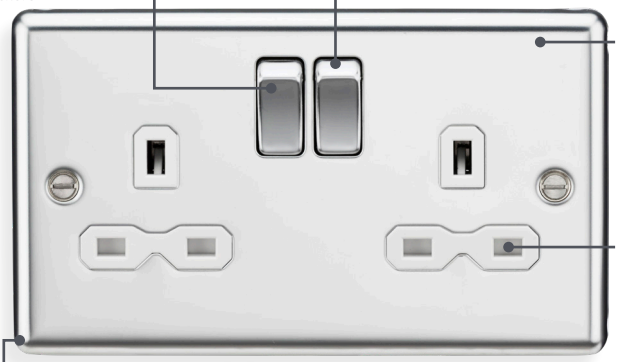

LONG LASTING

Robust full metal housing

UNIQUE SOCKET DESIGN

Socket completely concealed by plug once inserted

ROUND EDGE DESIGN

Projection of 7.5mm (including gasket)

TOP-DOWN TERMINATION

L, N and E can all be terminated from the top – ideal when installing multiple outlets

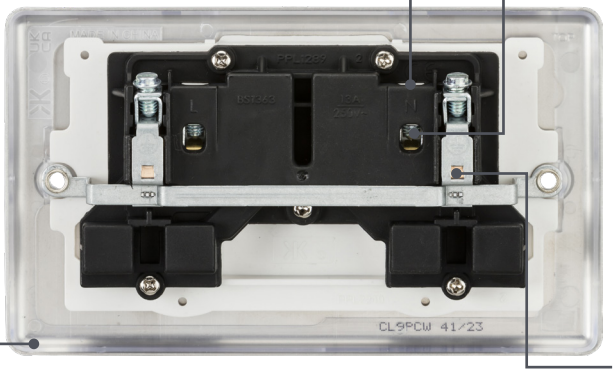

CAPTIVE TERMINALS

Appropriate terminal capacities and captive terminals to prevent screws falling out

INTEGRATED MOISTURE GASKET

Prevents any moisture transfer to decorative front plate

HIGH INTEGRITY EARTHING

Twin earth terminals where appropriate

---

25 YEAR WARRANTY*

*2 years on electronic products

DIMENSIONS*

Single plate: 86 x 86mm
Double plate: 146 x 86mm
Projection: 7.5mm

*Unless otherwise stated

High-quality imported components are used in this range, ensuring trouble-free charging and longevity for hospitality areas



	Finish	Style	Insert Options
○	Brushed Chrome	Metal	○ ● ●
○	Polished Chrome	Mirror	○ ● ●
●	Matt Black	Matt	●



13A 2G DP SWITCHED SOCKET WITH DUAL USB-C (20V DC 3.25A) MAX. 65W



65W DUAL FAST CHARGE [20V DC 3.25A]

CHARGES LAPTOPS

- Charge laptops at up to 65W from a single USB-C output
- Fast charge two devices at same time at up to 45W and 18W
- Double Pole Switches
- Outboard Rockers
- Twin Earths
- Dual USB-C Outputs
- Supports USB-PD and PPS Charging protocols
- Over Voltage CAT III – Suitable for domestic and commercial installations
- Built in overheat and overload protection
- Minimum mounting box depth: 25-35mm depending on wiring conditions

Code	Finish	Insert
CL9965MBB	Matt Black	Black

1G TRIPLE USB CHARGER PLATE (20V DC 3.15A) MAX. 63W



63W FAST CHARGE 20V DC 3.15A

CHARGES LAPTOPS

- 230V AC
- 2 x USB-C + 1 x USB-A charging outlets
- Supports QC, USB-PD and PPS Charging protocols
- Minimum mounting box depth: 25-35mm depending on wiring conditions

Code	Finish	Insert
CL63WMB	Matt Black	Black

13A 2G DP SWITCHED SOCKET WITH DUAL USB A+C (20V DC 2.25A) MAX. 45W



45W DUAL FAST CHARGE [20V⎓2.25A PD]

CHARGES LAPTOPS

- Charge small laptops and tablets at up to 45W from a single USB-C output
- Fast charge two devices at same time at up to 27W and 18W
- Double Pole Switches
- Twin Earths
- Dual USB A+C outputs
- Supports USB-PD and QC Charging protocols
- Over Voltage CAT III – Suitable for domestic and commercial installations
- Built in overheat and overload protection
- Minimum mounting box depth: 25-35mm depending on wiring conditions

Code	Finish	Insert
CL9945MBB	Matt Black	Black



13A 2G SP SWITCHED SOCKET WITH DUAL USB A+C (5V DC 4.0A SHARED)

- Charge portable devices
- Single Pole Switches
- Twin Earths
- Dual USB A+C outputs
- Over Voltage CAT III – Suitable for domestic and commercial installations
- Built in overheat and overload protection
- Minimum mounting box depth: 25-35mm depending on wiring conditions



20W
5V DC 4.0A (SHARED)

Code	Finish	Insert
CL9940BC	Brushed Chrome	Black
CL9940BCG	Brushed Chrome	Grey
CL9940BCW	Brushed Chrome	White
CL9940MBB	Matt Black	Black
CL9940PC	Polished Chrome	Black
CL9940PCG	Polished Chrome	Grey
CL9940PCW	Polished Chrome	White

13A 1G SP SWITCHED SOCKET WITH DUAL USB A+C (12V DC 1.5A) MAX. 18W

- Charge portable devices
- Fast charge one device at up to 18W QC or share across both outputs
- Single Pole Switch
- Dual USB A+C outputs
- Supports USB-PD and QC Charging protocols
- Over Voltage CAT III – Suitable for domestic and commercial installations
- Built in overheat and overload protection
- Minimum mounting box depth: 25-35mm depending on wiring conditions (10mm spacer included)



18W
FASTCHARGE
12V DC 1.5A

Code	Finish	Insert
CL9919MBB	Matt Black	Black

(USB-PD is supported by most Android phones and iPhone15 and above.)

13A 2G DP SWITCHED SOCKETS

- Double pole switches
- Twin Earths
- Minimum mounting box depth: 25mm

Code	Finish	Insert
CL9BC	Brushed Chrome	Black
CL9BCG	Brushed Chrome	Grey
CL9BCW	Brushed Chrome	White
CL9MBB	Matt Black	Black
CL9PC	Polished Chrome	Black
CL9PCG	Polished Chrome	Grey
CL9PCW	Polished Chrome	White



13A 1G DP SWITCHED SOCKETS

- Double pole switch
- Minimum mounting box depth: 25mm

Code	Finish	Insert
CL7BC	Brushed Chrome	Black
CL7BCG	Brushed Chrome	Grey
CL7BCW	Brushed Chrome	White
CL7MBB	Matt Black	Black
CL7PC	Polished Chrome	Black
CL7PCG	Polished Chrome	Grey
CL7PCW	Polished Chrome	White



13A DP KEY LOCKABLE SOCKET

- Key lock On or Off (incl. 2 keys)
- Designed to restrict unauthorized use
- Minimum mounting box depth: 35mm

Code	Finish	Insert
CL9LOCKBCW	Brushed Chrome	White
CL9LOCKMB	Matt Black	Black





NEW

13A 2G DP SWITCHED SOCKET WITH OUTBOARD ROCKERS

- Double pole switches
- Twin Earths
- Choice of Metal (BCxx) or Urea Rockers (BCxxUR) all with Red Flash
- Minimum mounting box depth: 25mm



Code	Finish	Insert	Rocker	
CL9001BC	Brushed Chrome	Black	Chrome	**NEW**
CL9001BCW	Brushed Chrome	White	Chrome	**NEW**
CL9001BCUR	Brushed Chrome	Black	Black	**NEW**
CL9001BCWUR	Brushed Chrome	White	White	**NEW**

13A 2G DP SWITCHED SOCKET WITH OUTBOARD ROCKERS WITH DUAL USB A+C (5V DC 4.0A SHARED)

20W
5V DC 4.0A (SHARED)

- Charge portable devices
- Double Pole Switches
- Twin Earths
- Choice of Metal (BCxx) or Urea Rockers (BCxxUR) all with Red Flash
- Dual USB A+C outputs
- Over Voltage CAT III – Suitable for domestic and commercial installations
- Built in overheat and overload protection
- Minimum mounting box depth: 25-35mm depending on wiring conditions



Code	Finish	Insert	Rocker	
CL9941BC	Brushed Chrome	Black	Chrome	**NEW**
CL9941BCW	Brushed Chrome	White	Chrome	**NEW**
CL9941BCUR	Brushed Chrome	Black	Black	**NEW**
CL9941BCWUR	Brushed Chrome	White	White	**NEW**

DUAL VOLTAGE SHAVER SOCKETS

- 115/230V 20VA rated
- Minimum mounting box depth: 47mm

Code	Finish	Insert
CL89BC	Brushed Chrome	Black
CL89BCG	Brushed Chrome	Grey
CL89BCW	Brushed Chrome	White
CL89MB	Matt Black	Black
CL89PC	Polished Chrome	Black
CL89PCG	Polished Chrome	Grey
CL89PCW	Polished Chrome	White



115/
230V

230V SHAVER SOCKET WITH DUAL USB A+C (5V DC 2.4A SHARED) MAX. 12W

- 230VAC 20VA
- Built in dual USB A+C charger ideal for charging bathroom accessories
- Minimum mounting box depth: 47mm

Code	Finish	Insert
CL8909MB	Matt Black	Black



230V
50Hz

12W
5V DC 2.4A
(SHARED)

5A ROUND PIN SOCKET

- Minimum mounting box depth: 25mm

Code	Finish	Insert
CL5ABC	Brushed Chrome	Black
CL5ABCG	Brushed Chrome	Grey
CL5ABCW	Brushed Chrome	White
CL5AMB	Matt Black	Black





NEW

10AX 1G DP SWITCHES

- 10AX DP switches are generally used when there are two circuits in a room i.e. a bathroom light and a Fan boost system
- Double pole switch
- Minimum mounting box depth: 16mm



Code	Size	Model	Finish	
CL1DPBC	1G	Double Pole	Brushed Chrome	**NEW**
CL1DPMBB	1G	Double Pole	Matt Black	**NEW**

10AX SWITCHES

- Minimum mounting box depth: 16mm



Code	Size	Model	Finish
CL12BC	1G	Intermediate	Brushed Chrome
CL12MBB	1G	Intermediate	Matt Black
CL12PC	1G	Intermediate	Polished Chrome
CL2BC	1G	2-Way	Brushed Chrome
CL2MBB	1G	2-Way	Matt Black
CL2PC	1G	2-Way	Polished Chrome

10A FAN ISOLATOR SWITCHES

- Triple Pole
- Rated conditional short circuit current (Inc.) 1500mA
- Minimum mounting box depth: 16mm



Code	Finish
CL11BC	Brushed Chrome
CL11MBB	Matt Black
CL11PC	Polished Chrome

NEW

1G LIGHT SWITCH ILLUMINATOR

- Creates "halo" glow effect behind switches when light is in the OFF position making it easier to find the light switch in Hotel rooms, bedrooms, storage rooms.
- This device is designed to fit behind most standard 86x86mm size 1G/2G/3G single plate switches and functions with both 1-way, 2-way, and DP switches it can also be used with single sockets if desired.
- This devices fits behind and works with ALL Knightsbridge 1G Switches from our moulded and decorative ranges







COMPATIBLE WITH OUR FULL DECORATIVE RANGE

Code	Size	Colour Temp	Colour	
1GHALO	1G	3000K	Warm White	NEW

10AX SWITCHES

- Minimum mounting box depth: 16mm



Code	Size	Model	Finish
CL3BC	2G	2-Way	Brushed Chrome
CL3MBB	2G	2-Way	Matt Black
CL3PC	2G	2-Way	Polished Chrome

10AX SWITCHES

- Minimum mounting box depth: 16mm



Code	Size	Model	Finish
CL4BC	3G	2-Way	Brushed Chrome
CL4MBB	3G	2-Way	Matt Black
CL4PC	3G	2-Way	Polished Chrome

10AX SWITCHES

- Minimum mounting box depth: 16mm



Code	Size	Model	Finish
CL41BC	4G	2-Way	Brushed Chrome
CL41MBB	4G	2-Way	Matt Black
CL41PC	4G	2-Way	Polished Chrome

10AX SWITCHES

- Minimum mounting box depth: 16mm



Code	Size	Model	Finish
CL42BC	6G	2-Way	Brushed Chrome
CL42MBB	6G	2-Way	Matt Black

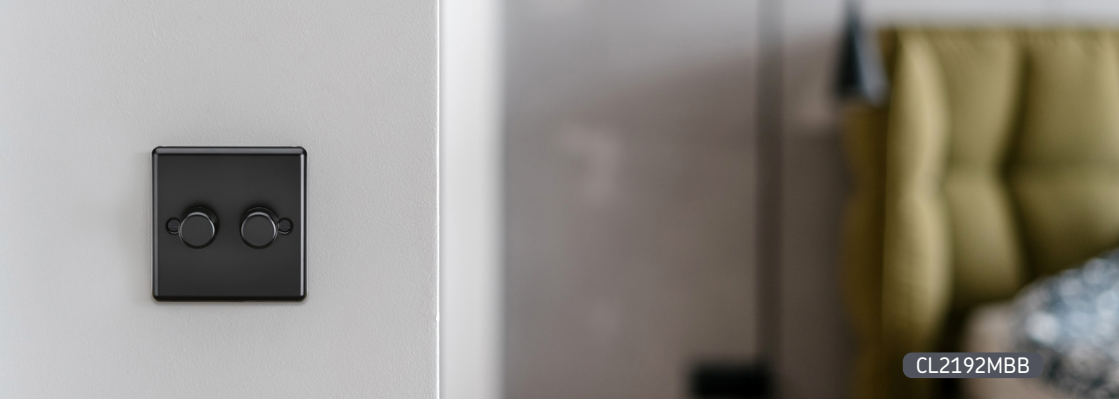

1G 2-WAY INTELLIGENT DIMMERS



- 10-200W (5-150W LED)
- Switch between Trailing Edge* and Leading Edge
- Minimum mounting box depth: 25mm

*Preset in Trailing Edge mode

Code	Size	Model	Finish
CL2191BC	1G	2-Way	Brushed Chrome
CL2191MBB	1G	2-Way	Matt Black
CL2191PC	1G	2-Way	Polished Chrome

2G 2-WAY INTELLIGENT DIMMERS



- 10-200W (5-150W LED)
- Switch between Trailing Edge* and Leading Edge
- Minimum mounting box depth: 25mm

*Preset in Trailing Edge mode

Code	Size	Model	Finish
CL2192BC	2G	2-Way	Brushed Chrome
CL2192MBB	2G	2-Way	Matt Black
CL2192PC	2G	2-Way	Polished Chrome

3G 2-WAY INTELLIGENT DIMMERS



- 10-200W (5-150W LED)
- Switch between Trailing Edge* and Leading Edge
- Minimum mounting box depth: 25mm

*Preset in Trailing Edge mode

Code	Size	Model	Finish
CL2193BC	3G	2-Way	Brushed Chrome
CL2193MBB	3G	2-Way	Matt Black
CL2193PC	3G	2-Way	Polished Chrome

4G 2-WAY INTELLIGENT DIMMERS

- 10-200W (5-150W LED)
- Switch between Trailing Edge* and Leading Edge
- Minimum mounting box depth: 25mm

*Preset in Trailing Edge mode



Code	Size	Model	Finish
CL2194BC	4G	2-Way	Brushed Chrome
CL2194MBB	4G	2-Way	Matt Black
CL2194PC	4G	2-Way	Polished Chrome

DIMMER UNPOPULATED PLATES

- 1G dimmer plate and matching dimmer cap
- Unpopulated
- Low Profile Flat Plate design with built in gasket
- Suitable for use with centre or offset dimmer modules



Code	Finish
CL1DIMBC	Brushed Chrome
CL1DIMMBB	Matt Black
CL1DIMPC	Polished Chrome

DIMMER MODULES

- 2-Way
- Leading Edge, Trailing Edge, and Intelligent options that can switch between both modes.
- Minimum mounting box depth: 25mm
- Build your own dimmer solution with our unpopulated dimmer plates
- Minimum mounting box depth: 35mm



Code	Max. Load	Mode
SN400M	40-400W (3-100W LED)	Leading Edge
VFR200I	10-200W (5-150W LED)	Intelligent Trailing/ Leading Edge
CU110V	6A 2-Way	1-10V*
CU150I	5-400W (5-150W LED)	Intelligent Trailing/ Leading Edge*

* Dimmer supplied with Curved Edge Grid Adaptor Plate

NEW

DECORATIVE SOLID METAL DIMMER CAP

- 20x15mm
- Add a touch of luxury to your dimmer by adding a Deco Metal Dimmer Cap

Construction: Aluminium



Code	Finish	
DIMDAB	Antique Brass	NEW
DIMDBB	Brushed Brass	NEW
DIMDBC	Brushed Chrome	NEW
DIMDMB	Matt Black	NEW

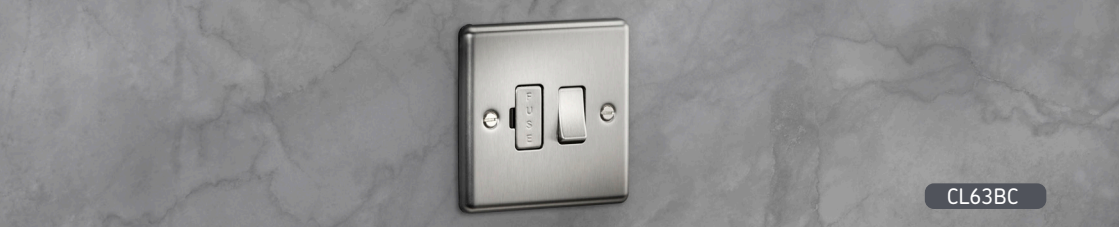

FUSED SPUR UNITS

- 13A rated
- Minimum mounting box depth: 25mm



Code	Model	Finish
CL6BC	Unswitched	Brushed Chrome
CL6MBB	Unswitched	Matt Black
CL6PC	Unswitched	Polished Chrome

SWITCHED FUSED SPUR

- 13A rated
- Double pole switches
- Minimum mounting box depth: 25mm



Code	Model	Finish
CL63BC	Switched	Brushed Chrome
CL63MBB	Switched	Matt Black
CL63PC	Switched	Polished Chrome

SWITCHED FUSED SPUR

- 13A rated
- Double pole switches
- Minimum mounting box depth: 25mm



Code	Model	Finish
CL63NBC	Switched + Neon	Brushed Chrome
CL63NMBB	Switched + Neon	Matt Black
CL63NPC	Switched + Neon	Polished Chrome

SWITCHED FUSED SPUR

- 13A rated
- Double pole switches
- Minimum mounting box depth: 25mm



Code	Model	Finish
CL63FBC	Switched + Neon + Flex Outlet (Front)	Brushed Chrome
CL63FMBB	Switched + Neon + Flex Outlet (Front)	Matt Black
CL63FPC	Switched + Neon + Flex Outlet (Front)	Polished Chrome

20A DP SWITCHES

- 20A rated
- Double Pole Switch
- Minimum mounting box depth: 25mm



Code	Model	Finish
CL834BC	DP	Brushed Chrome
CL834NBC	DP + Neon	Brushed Chrome
CL834FBC	DP + Neon + Flex Outlet	Brushed Chrome
CL834MBB	DP	Matt Black
CL834NMBB	DP + Neon	Matt Black
CL834FMBB	DP + Neon + Flex Outlet	Matt Black
CL834PC	DP	Polished Chrome
CL834NPC	DP + Neon	Polished Chrome
CL834FPC	DP + Neon + Flex Outlet	Polished Chrome

20A FLEX OUTLET PLATE

- 20A rated
- Flex outlet plate
- Suitable for cables up to 10mm diameter
- Cable strain relief fitted
- Terminal capacity: 3 x 2.5mm2 or 2 x 4.0mm2 (fitted with twin earth terminals)



Code	Model	Finish
CL8342BC	Flex Outlet	Brushed Chrome
CL8342MB	Flex Outlet	Matt Black
CL8342PC	Flex Outlet	Polished Chrome

45A 1G DP SWITCH WITH NEON

- Double pole switches
- Minimum mounting box depth: 25mm



Code	Model	Finish
CL81MNBC	45W Switched + Neon	Brushed Chrome
CL81MNMBB	45W Switched + Neon	Matt Black
CL81MNPC	45W Switched + Neon	Polished Chrome

45A 2G DP SWITCH WITH NEON

- Double pole switches
- Minimum mounting box depth: 25mm



Code	Model	Finish
CL82MNBC	45W Switched + Neon	Brushed Chrome
CL82MNMBB	45W Switched + Neon	Matt Black
CL82MNPC	45W Switched + Neon	Polished Chrome



45A DP COOKER SWITCH AND SOCKET COMBINATION

- 45A DP Switch for isolating cooker
- 13A DP switched socket for plug in appliances
- Matching metal rocker switches
- Neon indicators
- Twin Earths
- Minimum mounting box depth: 25mm



Code	Finish	Insert
CL83MNBC	Brushed Chrome	Black
CL83MNBCG	Brushed Chrome	Grey
CL83MNBCW	Brushed Chrome	White
CL83MNMBB	Matt Black	Black
CL83MNPC	Polished Chrome	Black
CL83MNPCG	Polished Chrome	Grey
CL83MNPCW	Polished Chrome	White

TELEPHONE SOCKETS

- Single shuttered RJ45 Outlet
- Minimum mounting box depth: 25mm



Code	Model	Finish
CL73BC	Master	Brushed Chrome
CL73MB	Master	Matt Black
CL73PC	Master	Polished Chrome
CL74BC	Extension	Brushed Chrome
CL74MB	Extension	Matt Black
CL74PC	Extension	Polished Chrome

CAT5E NETWORK OUTLETS

- Capable of supporting data transfer speeds of up to 1Gbps over 100m at a maximum bandwidth of 100Mhz
- UTP
- Single shuttered RJ45 Outlet
- Write on designation label
- Minimum mounting box depth: 35mm



Code	Model	Finish
CL45BC	RJ45	Brushed Chrome
CL45MB	RJ45	Matt Black

CAT6A NETWORK OUTLETS

- Capable of supporting data transfer speeds of up to 10Gbps over 100m at a maximum bandwidth of 500Mhz
- Backward compatible with CAT6 and CAT5e
- Enhanced PoE capabilities
- Reduced crosstalk
- UTP
- Single shuttered RJ45 Outlet
- Write on designation label
- Minimum mounting box depth: 35mm



Code	Model	Finish
CLC6BC	RJ45	Brushed Chrome
CLC6MB	RJ45	Matt Black

TV OUTLETS

- Coaxial and F-Connection TV Outlet Plates
- Minimum mounting box depth: 25mm



Code	Model	Finish
CL010BC	TV	Brushed Chrome
CL015BC	SAT TV	Brushed Chrome
CL010MB	TV	Matt Black
CL014MB	TV + SAT TV (Isolated)	Matt Black
CL010PC	TV	Polished Chrome

BLANKING PLATES

- Used to neatly cover unused or redundant boxes



Code	Size	Finish
CL85BC	1G	Brushed Chrome
CL85MB	1G	Matt Black
CL85PC	1G	Polished Chrome

BLANKING PLATES

- Used to neatly cover unused or redundant boxes



Code	Size	Finish
CL86BC	2G	Brushed Chrome
CL86MB	2G	Matt Black
CL86PC	2G	Polished Chrome



MODULAR FRAMES

- For use with 25 x 50mm and/or 50 x 50mm euro modules

Code	Model	Finish
CL1GBC	1 Module	Brushed Chrome
CL1GMB	1 Module	Matt Black
CL1GPC	1 Module	Polished Chrome



MODULAR FRAMES

- For use with 25 x 50mm and/or 50 x 50mm euro modules

Code	Model	Finish
CL2GBC	1-2 Modules	Brushed Chrome
CL2GMB	1-2 Modules	Matt Black
CL2GPC	1-2 Modules	Polished Chrome



MODULAR FRAMES

- For use with 25 x 50mm and/or 50 x 50mm euro modules

Code	Model	Finish
CL4GBC	2-4 Modules	Brushed Chrome
CL4GMB	2-4 Modules	Matt Black
CL4GPC	2-4 Modules	Polished Chrome



MODULAR INSERTS AVAILABLE
SEE PAGES 160-164





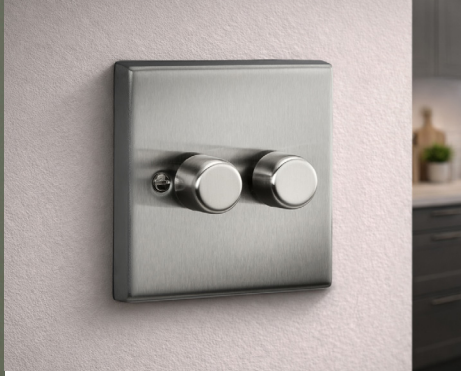







METAL DECORATIVE
SWITCHES & SOCKETS

SQUARE EDGE

A comprehensive range of metal decorative switches and sockets with a square edge design

2G | 1G USB Sockets	60 - 61
2G | 1G Sockets	62
Shaver Sockets | Round Pin Sockets | Fan Isolator Switch	63
Switches	64
Toggle Switches	65
Dimmers | Dimming Modules	66 - 67
Fused Spur Units | 20A Switches	68
Flex Outlet | Cooker Switches	69
Media Outlets | Blanking Plates | Modular Frames	70 - 71

DOUBLE POLE SWITCHES

On selected products for additional safety

COLOUR MATCHING

Matching metal rockers with no surround

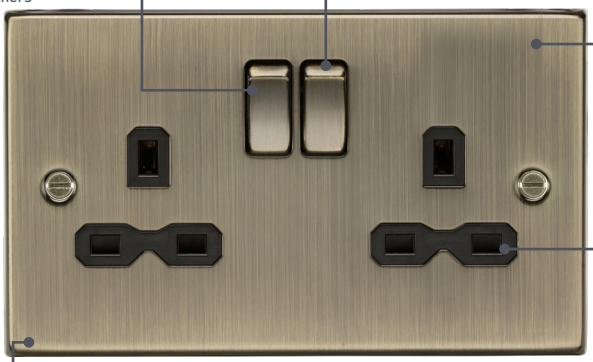

LONG LASTING

Robust full metal housing

UNIQUE SOCKET DESIGN

Socket completely concealed by plug once inserted

SQUARE EDGE DESIGN

Projection of 10.5mm (including gasket)

TOP-DOWN TERMINATION

L, N and E can all be terminated from the top – ideal when installing multiple outlets



CAPTIVE TERMINALS

Appropriate terminal capacities and captive terminals to prevent screws falling out

INTEGRATED MOISTURE GASKET

Prevents any moisture transfer to decorative front plate

HIGH INTEGRITY EARTHING

Twin earth terminals where appropriate

---

25 YEAR WARRANTY*

*2 years on electronic products

DIMENSIONS*

Single plate: 89 x 89mm
Double plate: 89 x 149mm
Projection: 10.5mm

*Unless otherwise stated

USB

High-quality imported components are used in this range, ensuring trouble-free charging and longevity for hospitality areas



	Finish	Style	Insert Options
	Brushed Chrome	Metal	
	Antique Brass	Metal	



13A 2G DP SWITCHED SOCKET WITH DUAL USB-C (20V DC 3.25A) MAX. 65W



65W DUAL FAST CHARGE [20V DC 3.25A]

CHARGES LAPTOPS

- Charge laptops at up to 65W from a single USB-C output
- Fast charge two devices at same time at up to 45W PD and 18W QC
- Double Pole Switches
- Outboard Rockers
- Twin Earths
- Dual USB-C Outputs
- Supports QC, USB-PD and PPS Charging protocols
- Over Voltage CAT III – Suitable for domestic and commercial installations
- Built in overheat and overload protection
- Minimum mounting box depth: 25mm

Code	Finish	Insert
CS9965AB	Antique Brass	Black

13A 2G DP SWITCHED SOCKET WITH DUAL USB A+C (20V DC 2.25A) MAX. 45W



45W DUAL FAST CHARGE [20V=2.25A PD]

CHARGES LAPTOPS

- Charge small laptops and tablets at up to 45W from a single USB-C output
- Fast charge two devices at same time at up to 27W PD and 18W QC
- Double Pole Switches
- Twin Earths
- Dual USB A+C outputs
- Supports USB-PD and QC Charging protocols
- Over Voltage CAT III – Suitable for domestic and commercial installations
- Built in overheat and overload protection
- Minimum mounting box depth: 25mm

Code	Finish	Insert
CS9945AB	Antique Brass	Black

NEW 2-IN-1 240W USB CHARGING CABLES
SEE PAGE 167





13A 2G SP SWITCHED SOCKET WITH DUAL USB A+C (5V DC 4.0A SHARED) MAX. 20W






20W
5V DC 4.0A (SHARED)

- Charge portable devices
- Dual USB A+C outputs
- Over Voltage CAT III – Suitable for domestic and commercial installations
- Built in overheat and overload protection
- Minimum mounting box depth: 25mm

Code	Finish	Insert
CS9940BC	Brushed Chrome	Black
CS9940BCG	Brushed Chrome	Grey
CS9940BCW	Brushed Chrome	White
CS9940AB	Antique Brass	Black

13A 1G SP SWITCHED SOCKET WITH DUAL USB A+C (12V DC 1.5A) MAX. 18W



18W
FAST CHARGE
12V DC 1.5A

- Charge portable devices
- Fast charge one device at up to 18W QC or share across both outputs
- Single Pole Switch
- Dual USB A+C outputs
- Supports USB-PD and QC Charging protocols
- Over Voltage CAT III – Suitable for domestic and commercial installations
- Built in overheat and overload protection
- Minimum mounting box depth: 25-35mm depending on wiring conditions (10mm spacer included)

Code	Finish	Insert
CS9919AB	Antique Brass	Black

(USB-PD is supported by most Android phones and iPhone15 and above.)

FLIP-DOWN PHONE HOLDER FOR USE WITH DOUBLE SWITCHED SOCKETS WITH USB CHARGING FACILITY AVAILABLE. SEE PAGE 199





13A 2G DP SWITCHED SOCKETS

- Double pole switches
- Twin Earths
- Minimum mounting box depth: 25mm

Code	Finish	Insert
CS9BC	Brushed Chrome	Black
CS9BCG	Brushed Chrome	Grey
CS9BCW	Brushed Chrome	White
CS9AB	Antique Brass	Black



13A 1G DP SWITCHED SOCKETS

- Double pole switches
- Minimum mounting box depth: 25mm

Code	Finish	Insert
CS7BC	Brushed Chrome	Black
CS7BCG	Brushed Chrome	Grey
CS7BCW	Brushed Chrome	White
CS7AB	Antique Brass	Black





CS89BC

DUAL VOLTAGE SHAVER SOCKETS

- IP41 rated
- 115/230V 20VA rated
- Minimum mounting box depth: 47mm

Code	Finish	Insert
CS89BC	Brushed Chrome	Black
CS89BCG	Brushed Chrome	Grey
CS89BCW	Brushed Chrome	White
CS89AB	Antique Brass	Black



115/ 230V

IP41

5A ROUND PIN SOCKETS

- Minimum mounting box depth: 25mm

Code	Finish	Insert
CS5AAB	Antique Brass	Black



10A FAN ISOLATOR SWITCH

- Triple Pole
- Rated conditional short circuit current (Inc) 1500mA
- Minimum mounting box depth: 16mm

Code	Finish
CS11BC	Brushed Chrome
CS11AB	Antique Brass





1GHALO + CS2BC

NEW

1G LIGHT SWITCH ILLUMINATOR

- Creates "halo" glow effect behind switches when light is in the OFF position making it easier to find the light switch in Hotel rooms, bedrooms, storage rooms.
- This device is designed to fit behind most standard 86x86mm size 1G/2G/3G single plate switches and functions with both 1-way, 2-way, and DP switches it can also be used with single sockets if desired.
- This devices fits behind and works with ALL Knightbridge 1G Switches from our moulded and decorative ranges



Code	Size	Colour Temp	Colour	
1GHALO	1G	3000K	Warm White	NEW

10AX 1G DP SWITCHES

- Double pole switch
- Minimum mounting box depth: 16mm



Code	Size	Model	Finish
CS1DPAB	1G	Double Pole	Antique Brass

10AX SWITCHES

- Minimum mounting box depth: 16mm





Code	Size	Model	Finish
CS12BC	1G	Intermediate	Brushed Chrome
CS12AB	1G	Intermediate	Antique Brass
CS2BC	1G	2-Way	Brushed Chrome
CS2AB	1G	2-Way	Antique Brass

10AX SWITCHES

- Minimum mounting box depth: 16mm

Code	Size	Model	Finish
CS3BC	2G	2-Way	Brushed Chrome
CS3AB	2G	2-Way	Antique Brass



10AX SWITCHES

- Minimum mounting bx depth: 16mm

Code	Size	Model	Finish
CS4BC	3G	2-Way	Brushed Chrome
CS4AB	3G	2-Way	Antique Brass



10AX SWITCHES

- Minimum mounting box depth: 16mm

Code	Size	Model	Finish
CS41BC	4G	2-Way	Brushed Chrome
CS41AB	4G	2-Way	Antique Brass



10AX SWITCHES

- Minimum mounting box depth: 16mm

Code	Size	Model	Finish
CS42AB	6G	2-Way	Antique Brass



10AX TOGGLE SWITCHES

- Minimum mounting box depth: 16mm

Code	Size	Model	Finish
CSTOG12AB	1G	Intermediate	Antique Brass
CSTOG1AB	1G	2-Way	Antique Brass
CSTOG2AB	2G	2-Way	Antique Brass
CSTOG3AB	3G	2-Way	Antique Brass
CSTOG4AB	4G	2-Way	Antique Brass





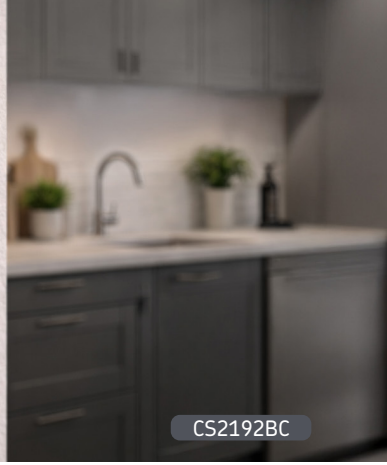

1G 2-WAY INTELLIGENT DIMMERS

- 10-200W (5-150W LED)
- Switch between Trailing Edge* and Leading Edge
- Minimum mounting box depth: 25mm

*Preset in Trailing Edge mode





Code	Finish
CS2191BC	Brushed Chrome
CS2191AB	Antique Brass

2G 2-WAY INTELLIGENT DIMMERS

- 10-200W (5-150W LED)
- Switch between Trailing Edge* and Leading Edge
- Minimum mounting box depth: 25mm

*Preset in Trailing Edge mode





Code	Finish
CS2192BC	Brushed Chrome
CS2192AB	Antique Brass

3G 2-WAY INTELLIGENT DIMMERS

- 10-200W (5-150W LED)
- Switch between Trailing Edge* and Leading Edge
- Minimum mounting box depth: 25mm

*Preset in Trailing Edge mode





Code	Finish
CS2193BC	Brushed Chrome
CS2193AB	Antique Brass

4G 2-WAY INTELLIGENT DIMMERS

- 10-200W (5-150W LED)
- Switch between Trailing Edge* and Leading Edge
- Minimum mounting box depth: 25mm

*Preset in Trailing Edge mode



Code	Finish
CS2194BC	Brushed Chrome
CS2194AB	Antique Brass

DIMMER UNPOPULATED PLATES

- 1G dimmer plate and matching dimmer cap
- Unpopulated
- Low Profile Flat Plate design with built in gasket
- Suitable for use with centre or offset dimmer modules



Code	Finish
CS1DIMBC	Brushed Chrome
CS1DIMAB	Antique Brass

DIMMER MODULES

- 2-Way
- Leading Edge, Trailing Edge, and Intelligent options that can switch between both modes.
- Minimum mounting box depth: 25mm
- Build your own dimmer solution with our unpopulated dimmer plates
- Minimum mounting box depth: 35mm



Code	Max. Load	Mode
SN400M	40-400W (3-100W LED)	Leading Edge
VFR200I	10-200W (5-150W LED)	Intelligent Trailing/ Leading Edge
CU110V	6A 2-Way	1-10V*
CU150I	5-400W (5-150W LED)	Intelligent Trailing/ Leading Edge*

* Dimmer supplied with Curved Edge Grid Adaptor Plate

DECORATIVE SOLID METAL DIMMER CAP

- 20x15mm
- Add a touch of luxury to your dimmer by adding a Deco Metal Dimmer Cap

Construction: Aluminium



Code	Finish	
DIMDAB	Antique Brass	NEW
DIMDBB	Brushed Brass	NEW
DIMDBC	Brushed Chrome	NEW
DIMDMB	Matt Black	NEW

NEW

FUSED SPUR UNITS

- 13A rated
- Minimum mounting box depth: 25mm



Code	Model	Finish
CS6BC	Unswitched	Brushed Chrome
CS6AB	Unswitched	Antique Brass

SWITCHED FUSED SPUR

- 13A rated
- Double pole switches
- Minimum mounting box depth: 25mm



Code	Model	Finish
CS63BC	Switched	Brushed Chrome
CS63AB	Switched	Antique Brass

SWITCHED FUSED SPUR

- 13A rated
- Double pole switches
- Minimum mounting box depth: 25mm



Code	Model	Finish
CS63NBC	Switched + Neon	Brushed Chrome
CS63NAB	Switched + Neon	Antique Brass

SWITCHED FUSED SPUR

- 13A rated
- Double pole switches
- Minimum mounting box depth: 25mm



Code	Model	Finish
CS63FBC	Switched + Neon + Flex Outlet	Brushed Chrome
CS63FAB	Switched + Neon + Flex Outlet	Antique Brass

20A DP SWITCHES

- 20A rated
- Double Pole Switch
- Minimum mounting box depth: 25mm



Code	Model	Finish
CS834BC	DP	Brushed Chrome
CS834NBC	DP + Neon	Brushed Chrome
CS834FBC	DP + Neon + Flex Outlet	Brushed Chrome
CS834AB	DP	Antique Brass
CS834NAB	DP + Neon	Antique Brass
CS834FAB	DP + Neon + Flex Outlet	Antique Brass

FLEX OUTLET PLATE

- 20A rated
- Flex outlet plate
- Suitable for cables up to 10mm diameter
- Cable strain relief fitted
- Terminal capacity: 3 x 2.5mm2 or 2 x 4.0mm2 (fitted with twin earth terminals)



Code	Model	Finish
CS8342BC	Flex Outlet	Brushed Chrome
CS8342AB	Flex Outlet	Antique Brass

45A DP COOKER SWITCH AND SOCKET COMBINATION

- 45A DP Switch for isolating cooker
- 13A DP switched socket for plug in appliances
- Matching metal rocker switches
- Neon indicators
- Twin Earths
- Minimum mounting box depth: 47mm



Code	Finish	Insert
CS83MNBC	Brushed Chrome	Black
CS83MNBCG	Brushed Chrome	Grey
CS83MNBCW	Brushed Chrome	White
CS83MNAB	Antique Brass	Black

45A COOKER SWITCHES WITH NEONS

- Double pole switches
- Minimum mounting box depth: 47mm



Code	Size	Finish
CS81MNBC	Single	Brushed Chrome
CS81MNAB	Single	Antique Brass

45A COOKER SWITCHES WITH NEONS

- Double pole switches
- Minimum mounting box depth: 47mm



Code	Size	Finish
CS82MNBC	Double	Brushed Chrome
CS82MNAB	Double	Antique Brass



CAT5E NETWORK OUTLETS



- Capable of supporting data transfer speeds of up to 1Gbps over 100m at a maximum bandwidth of 100Mhz
- UTP
- Single shuttered RJ45 Outlet
- Write on designation label
- Minimum mounting box depth: 35mm

Code	Model	Finish
CS45AB	RJ45	Antique Brass

NEW

CAT6A NETWORK OUTLETS



- Capable of supporting data transfer speeds of up to 10Gbps over 100m at a maximum bandwidth of 500Mhz
- Backward compatible with CAT6 and CAT5e
- Enhanced PoE capabilities
- Reduced crosstalk
- UTP
- Single shuttered RJ45 Outlet
- Write on designation label
- Minimum mounting box depth: 35mm

Code	Model	Finish	
CSC6AB	RJ45	Antique Brass	**NEW**

TV OUTLET





- Coaxial Outlet Plates
- Minimum mounting box depth: 25mm

Code	Model	Finish
CS010BC	Non-Isolated	Brushed Chrome
CS010AB	Non-Isolated	Antique Brass

BLANKING PLATES

- Used to neatly cover unused or redundant boxes

Code	Size	Finish
CS85BC	1G	Brushed Chrome
CS85AB	1G	Antique Brass



BLANKING PLATES

- Used to neatly cover unused or redundant boxes

Code	Size	Finish
CS86BC	2G	Brushed Chrome
CS86AB	2G	Antique Brass



MODULAR FRAMES

- For use with 25 x 50mm and/or 50 x 50mm euro modules

Code	Model	Finish
CS1GBC	1 Module	Brushed Chrome
CS1GAB	1 Module	Antique Brass



MODULAR FRAMES

- For use with 25 x 50mm and/or 50 x 50mm euro modules

Code	Model	Finish
CS2GBC	1-2 Modules	Brushed Chrome
CS2GAB	1-2 Modules	Antique Brass



MODULAR FRAMES

- For use with 25 x 50mm and/or 50 x 50mm euro modules

Code	Model	Finish
CS4GBC	2-4 Modules	Brushed Chrome
CS4GAB	2-4 Modules	Antique Brass



MODULAR INSERTS AVAILABLE
SEE PAGES 160-164










OFF





METAL DECORATIVE SWITCHES & SOCKETS

FLAT PLATE

Metal decorative switches and sockets featuring an ultra-slim profile design

2G Sockets | 2G USB Sockets | 1G	76 - 77
Shaver Sockets	78
Fan Isolator Switch | Round Pin Sockets	79
Switches	80 - 81
Toggle Switches	82
Dimmers | Dimming Modules	82 - 84
Fused Spur Units	86 - 87
20A Switches | Flex Outlet | 45A Cooker Switch	88 - 90
Media Outlets	90 - 91
Blanking Plates | Modular Floor Plates	92 - 93

DOUBLE POLE SWITCHES

On selected products for additional safety

COLOUR MATCHING

Matching metal rockers with no surround

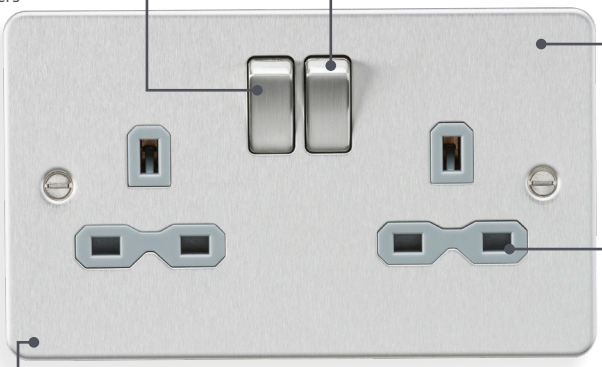

LONG LASTING

Robust full metal housing

UNIQUE SOCKET DESIGN

Socket completely concealed by plug once inserted

ULTRA-SLIM DESIGN

Projection of just 2.5mm (including gasket)

TOP-DOWN TERMINATION

L, N and E can all be terminated from the top – ideal when installing multiple outlets

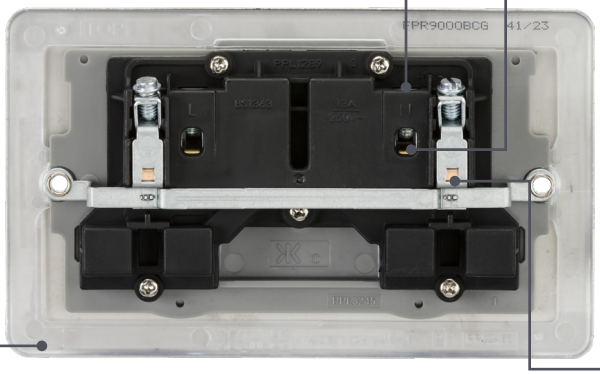

CAPTIVE TERMINALS

Appropriate terminal capacities and captive terminals to prevent screws falling out

INTEGRATED MOISTURE GASKET

Prevents any moisture transfer to decorative front plate

HIGH INTEGRITY EARTHING

Twin earth terminals where appropriate

---

25 YEAR WARRANTY*

*2 years on electronic products

DIMENSIONS*

Single plate: 87.5 x 87.5mm
Double plate: 87.5 x 147.5mm
Projection: 2.5mm

*Unless otherwise stated

USB

High-quality imported components are used in this range, ensuring trouble-free charging and longevity for hospitality areas



	Finish	Style	Insert Options
	Pearl	Matt	
	Brushed Brass	Metal	
	Brushed Chrome	Metal	
	Polished Brass	Mirror	
	Gunmetal	Mirror	
	Polished Chrome	Mirror	



13A 2G SP SWITCHED SOCKET WITH DUAL USB A+C (5V DC 4.0A SHARED) MAX. 20W

- Charge portable devices
- Twin Earths
- Dual USB A+C outputs
- Over Voltage CAT III – Suitable for domestic and commercial installations
- Built in overheat and overload protection
- Minimum mounting box depth: 35mm

Code	Finish	Insert
FPR9940BC	Brushed Chrome	Black
FPR9940BCG	Brushed Chrome	Grey
FPR9940BCW	Brushed Chrome	White
FPR9940GM	Gunmetal	Black
FPR9940PB	Polished Brass	Black
FPR9940PLW	Pearl	White
FPR9940BB	Brushed Brass	Black
FPR9940PC	Polished Chrome	Black
FPR9940PCG	Polished Chrome	Grey
FPR9940PCW	Polished Chrome	White



20W
5V DC 4.0A (SHARED)



FPR9000BCG

13A 2G DP SWITCHED SOCKETS

- Double pole switches
- Twin Earths
- Minimum mounting box depth: 25mm

Code	Finish	Insert
FPR9000BC	Brushed Chrome	Black
FPR9000BCG	Brushed Chrome	Grey
FPR9000BCW	Brushed Chrome	White
FPR9000GM	Gunmetal	Black
FPR9000PB	Polished Brass	Black
FPR9000PLW	Pearl	White
FPR9000BB	Brushed Brass	Black
FPR9000PC	Polished Chrome	Black
FPR9000PCG	Polished Chrome	Grey
FPR9000PCW	Polished Chrome	White



13A 1G DP SWITCHED SOCKETS

- Double pole switches
- Minimum mounting box depth: 25mm

Code	Finish	Insert
FPR7000BC	Brushed Chrome	Black
FPR7000BCG	Brushed Chrome	Grey
FPR7000BCW	Brushed Chrome	White
FPR7000GM	Gunmetal	Black
FPR7000PB	Polished Brass	Black
FPR7000PLW	Pearl	White
FPR7000BB	Brushed Brass	Black
FPR7000PC	Polished Chrome	Black
FPR7000PCG	Polished Chrome	Grey
FPR7000PCW	Polished Chrome	White





DUAL VOLTAGE SHAVER SOCKETS

- IP41 rated
- 115/230V 20VA rated
- Minimum mounting box depth: 47mm

Code	Finish	Insert
FP8900BC	Brushed Chrome	Black
FP8900BCG	Brushed Chrome	Grey
FP8900BCW	Brushed Chrome	White
FP8900GM	Gunmetal	Black
FP8900PB	Polished Brass	Black
FP8900PLW	Pearl	White
FP8900BB	Brushed Brass	Black
FP8900PC	Polished Chrome	Black
FP8900PCG	Polished Chrome	Grey
FP8900PCW	Polished Chrome	White



115/ 230V

IP41



FP1100GM

10A FAN ISOLATOR SWITCHES

- Triple Pole
- Rated conditional short circuit current (Inc) 1500mA
- Minimum mounting box depth: 16mm



Code	Finish
FP1100BC	Brushed Chrome
FP1100GM	Gunmetal
FP1100PB	Polished Brass
FP1100PL	Pearl
FP1100BB	Brushed Brass
FP1100PC	Polished Chrome

5A ROUND PIN SOCKET

- Minimum mounting box depth: 25mm



Code	Finish	Insert
FP5ABC	Brushed Chrome	Black
FP5ABCG	Brushed Chrome	Grey
FP5ABCW	Brushed Chrome	White
FP5APB	Polished Brass	Black
FP5APLW	Pearl	White
FP5ABB	Brushed Brass	Black
FP5APC	Polished Chrome	Black
FP5APCG	Polished Chrome	Grey
FP5APCW	Polished Chrome	White

NEW

1G LIGHT SWITCH ILLUMINATOR

- Creates "halo" glow effect behind switches when light is in the OFF position making it easier to find the light switch in Hotel rooms, bedrooms, storage rooms.
- This device is designed to fit behind most standard 86x86mm size 1G/2G/3G single plate switches and functions
  with both 1-way, 2-way, and DP switches it can also be used with single sockets if desired.
- This devices fits behind and works with ALL Knightsbridge 1G Switches from our moulded and decorative ranges



Code	Size	Colour Temp	Colour
1GHALO	1G	3000K	Warm White **NEW**



COMPATIBLE WITH OUR FULL DECORATIVE RANGE

10AX SWITCHES

- Minimum mounting box depth: 16mm



Code	Size	Model	Finish
FP1200BC	1G	Intermediate	Brushed Chrome
FP1200GM	1G	Intermediate	Gunmetal
FP1200PB	1G	Intermediate	Polished Brass
FP1200PL	1G	Intermediate	Pearl
FP1200BB	1G	Intermediate	Brushed Brass
FP1200PC	1G	Intermediate	Polished Chrome
FP2000BC	1G	2-Way	Brushed Chrome
FP2000GM	1G	2-Way	Gunmetal
FP2000PB	1G	2-Way	Polished Brass
FP2000PL	1G	2-Way	Pearl
FP2000BB	1G	2-Way	Brushed Brass
FP2000PC	1G	2-Way	Polished Chrome

10AX SWITCHES

- Minimum mounting box depth: 16mm



Code	Size	Model	Finish
FP3000BC	2G	2-Way	Brushed Chrome
FP3000GM	2G	2-Way	Gunmetal
FP3000PB	2G	2-Way	Polished Brass
FP3000PL	2G	2-Way	Pearl
FP3000BB	2G	2-Way	Brushed Brass
FP3000PC	2G	2-Way	Polished Chrome



10AX SWITCHES

- Minimum mounting box depth: 16mm

Code	Size	Model	Finish
FP4000BC	3G	2-Way	Brushed Chrome
FP4000GM	3G	2-Way	Gunmetal
FP4000PB	3G	2-Way	Polished Brass
FP4000PL	3G	2-Way	Pearl
FP4000BB	3G	2-Way	Brushed Brass
FP4000PC	3G	2-Way	Polished Chrome



10AX SWITCHES

- Minimum mounting box depth: 16mm

Code	Size	Model	Finish
FP4100BC	4G	2-Way	Brushed Chrome
FP4100GM	4G	2-Way	Gunmetal
FP4100PB	4G	2-Way	Polished Brass
FP4100PL	4G	2-Way	Pearl
FP4100BB	4G	2-Way	Brushed Brass
FP4100PC	4G	2-Way	Polished Chrome

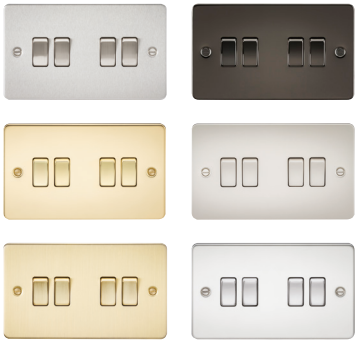





10AX TOGGLE SWITCHES

- Minimum mounting box depth: 16mm

Code	Size	Model	Finish
FP1TOGBB	1G	2-Way	Brushed Brass
FP1TOGBC	1G	2-Way	Brushed Chrome
FP1TOGPB	1G	2-Way	Polished Brass
FP12TOGBB	1G	Intermediate	Brushed Brass
FP2TOGBB	2G	2-Way	Brushed Brass
FP2TOGBC	2G	2-Way	Brushed Chrome
FP2TOGPB	2G	2-Way	Polished Brass
FP3TOGBB	3G	2-Way	Brushed Brass
FP4TOGBB	4G	4-Way	Brushed Brass



1G 2-WAY INTELLIGENT DIMMERS

- 10-200W (5-150W LED)
- Switch between Trailing Edge* and Leading Edge
- Minimum mounting box depth: 25mm

*Preset in Trailing Edge mode

Code	Finish
FP2191BC	Brushed Chrome
FP2191GM	Gunmetal
FP2191PB	Polished Brass
FP2191PL	Pearl
FP2191BB	Brushed Brass
FP2191PC	Polished Chrome



2G 2-WAY INTELLIGENT DIMMERS

- 10-200W (5-150W LED)
- Switch between Trailing Edge* and Leading Edge
- Minimum mounting box depth: 25mm

*Preset in Trailing Edge mode

Code	Finish
FP2192BC	Brushed Chrome
FP2192GM	Gunmetal
FP2192PB	Polished Brass
FP2192PL	Pearl
FP2192BB	Brushed Brass
FP2192PC	Polished Chrome



3G 2-WAY INTELLIGENT DIMMERS

- 10-200W (5-150W LED)
- Switch between Trailing Edge* and Leading Edge
- Minimum mounting box depth: 25mm

*Preset in Trailing Edge mode

Code	Finish
FP2193BC	Brushed Chrome
FP2193GM	Gunmetal
FP2193PB	Polished Brass
FP2193PL	Pearl
FP2193BB	Brushed Brass
FP2193PC	Polished Chrome

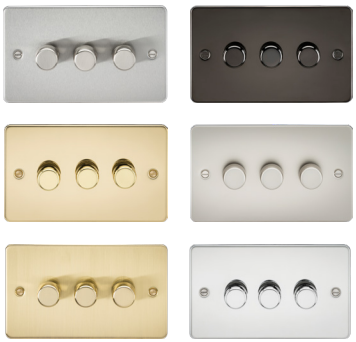

4G 2-WAY INTELLIGENT DIMMERS

- 10-200W (5-150W LED)
- Switch between Trailing Edge* and Leading Edge
- Minimum mounting box depth: 25mm

*Preset in Trailing Edge mode

Code	Finish
FP2194BC	Brushed Chrome
FP2194GM	Gunmetal
FP2194PB	Polished Brass
FP2194PL	Pearl
FP2194BB	Brushed Brass
FP2194PC	Polished Chrome



DIMMER UNPOPULATED PLATES

- 1G dimmer plate and matching dimmer cap
- Unpopulated
- Low Profile Flat Plate design with built in gasket
- Suitable for use with centre or offset dimmer modules
- Minimum mounting box depth: 25mm



Code	Finish
FP1DIMBC	Brushed Chrome
FP1DIMBB	Brushed Brass
FP1DIMPC	Polished Chrome

DIMMER MODULES

- 2-Way
- Leading Edge, Trailing Edge, and Intelligent options that can switch between both modes.
- Minimum mounting box depth: 25mm
- Build your own dimmer solution with our unpopulated dimmer plates
- Minimum mounting box depth: 35mm



Code	Max. Load	Mode
SN400M	40-400W (3-100W LED)	Leading Edge
VFR200I	10-200W (5-150W LED)	Intelligent Trailing/ Leading Edge
CU110V	6A 2-Way	1-10V*
CU150I	5-400W (5-150W LED)	Intelligent Trailing/ Leading Edge*

* Dimmer supplied with Curved Edge Grid Adaptor Plate

NEW

DECORATIVE SOLID METAL DIMMER CAP

- 20x15mm
- Add a touch of luxury to your dimmer by adding a Deco Metal Dimmer Cap

Construction: Aluminium



Code	Finish	
DIMDAB	Antique Brass	NEW
DIMDBB	Brushed Brass	NEW
DIMDBC	Brushed Chrome	NEW
DIMDMB	Matt Black	NEW

WIRING ACCESSORIES

INCLUDING SWITCHES, SOCKETS, USB TECHNOLOGY, GRID OPTIONS AND MORE

Complying with British Safety Standards and offering a robust 25-year warranty, the Knightsbridge range is among the most extensive on the market. Our selection offers a dependable and adaptable choice for any wiring requirement.



SCREWLESS | LOW PROFILE

PREMIUM GRADE METAL CONSTRUCTION



ROUNDED EDGE



FLAT PLATE | LOW PROFILE



SQUARE EDGE

ANTHRACITE | BRUSHED CHROME | BLACK NICKEL | MATT BLACK | MATT WHITE | POLISHED BRASS | POLISHED CHROME | SMOKED BRONZE | ANTIQUE BRASS | PEARL | BRUSHED BRASS

Certain finishes may not be accessible across all ranges. Please refer to the specific range to verify the available finishes.

MOULDED THERMOSET RESIN



SQUARE EDGE



CURVED EDGE



FUSED SPUR UNITS

- 13A rated
- Minimum mounting box depth: 25mm



Code	Model	Finish
FP6000BC	Unswitched	Brushed Chrome
FP6000GM	Unswitched	Gunmetal
FP6000PB	Unswitched	Polished Brass
FP6000PL	Unswitched	Pearl
FP6000BB	Unswitched	Brushed Brass
FP6000PC	Unswitched	Polished Chrome

SWITCHED FUSED SPURS

- 13A rated
- Double pole switches
- Minimum mounting box depth: 25mm



Code	Model	Finish
FP6300NBC	Switched + Neon	Brushed Chrome
FP6300NGM	Switched + Neon	Gunmetal
FP6300NPB	Switched + Neon	Polished Brass
FP6300NPL	Switched + Neon	Pearl
FP6300NBB	Switched + Neon	Brushed Brass
FP6300NPC	Switched + Neon	Polished Chrome



SWITCHED FUSED SPURS

- 13A rated
- Double pole switches
- Minimum mounting box depth: 25mm

Code	Model	Finish
FP6300BC	Switched	Brushed Chrome
FP6300GM	Switched	Gunmetal
FP6300PB	Switched	Polished Brass
FP6300PL	Switched	Pearl
FP6300BB	Switched	Brushed Brass
FP6300PC	Switched	Polished Chrome



SWITCHED FUSED SPURS

- 13A rated
- Double pole switches
- Minimum mounting box depth: 25mm

Code	Model	Finish
FP6300FBC	Switched + Neon + Flex Outlet (Front)	Brushed Chrome
FP6300FGM	Switched + Neon + Flex Outlet (Front)	Gunmetal
FP6300FPB	Switched + Neon + Flex Outlet (Front)	Polished Brass
FP6300FPL	Switched + Neon + Flex Outlet (Front)	Pearl
FP6300FBB	Switched + Neon + Flex Outlet (Front)	Brushed Brass
FP6300FPC	Switched + Neon + Flex Outlet (Front)	Polished Chrome



20A SWITCHES

- Double pole switches
- Minimum mounting box depth: 25mm

Code	Model	Finish
FP8341BC	Switched	Brushed Chrome
FP8341GM	Switched	Gunmetal
FP8341PB	Switched	Polished Brass
FP8341PL	Switched	Pearl
FP8341BB	Switched	Brushed Brass
FP8341PC	Switched	Polished Chrome



20A SWITCHES

- Double pole switches
- Minimum mounting box depth: 25mm

Code	Model	Finish
FP8341NBC	Switched + Neon	Brushed Chrome
FP8341NGM	Switched + Neon	Gunmetal
FP8341NPB	Switched + Neon	Polished Brass
FP8341NPL	Switched + Neon	Pearl
FP8341NBB	Switched + Neon	Brushed Brass
FP8341NPC	Switched + Neon	Polished Chrome



20A SWITCHES

- Double pole switches
- Minimum mounting box depth: 25mm

Code	Model	Finish
FP8341FBC	Switched + Neon + Flex Outlet (Front)	Brushed Chrome
FP8341FGM	Switched + Neon + Flex Outlet (Front)	Gunmetal
FP8341FPB	Switched + Neon + Flex Outlet (Front)	Polished Brass
FP8341FBB	Switched + Neon + Flex Outlet (Front)	Brushed Brass
FP8341FPC	Switched + Neon + Flex Outlet (Front)	Polished Chrome



FLEX OUTLET PLATES

- 20A rated
- Flex outlet plate
- Suitable for cables up to 10mm diameter
- Cable strain relief fitted
- Terminal capacity: 3 x 2.5mm2 or 2 x 4.0mm2 (fitted with twin earth terminals)



Code	Model	Finish
FP8342BC	Flex Outlet	Brushed Chrome
FP8342BB	Flex Outlet	Brushed Brass
FP8342PC	Flex Outlet	Polished Chrome

45A COOKER SWITCHES

- Double pole switches
- Neon indicator
- Minimum mounting box depth: 47mm



Code	Finish	Size
FP81MNBC	Brushed Chrome	Single
FP81MNGM	Gunmetal	Single
FP81MNPB	Polished Brass	Single
FP81MNPL	Pearl	Single
FP81MNBB	Brushed Brass	Single
FP81MNPC	Polished Chrome	Single

45A COOKER SWITCHES

- Double pole switches
- Neon indicator
- Minimum mounting box depth: 47mm



Code	Finish	Size
FP82MNBC	Brushed Chrome	Double
FP82MNGM	Gunmetal	Double
FP82MNPB	Polished Brass	Double
FP82MNPL	Pearl	Double
FP82MNBB	Brushed Brass	Double
FP82MNPC	Polished Chrome	Double

45A DP SWITCH AND 13A SWITCHED SOCKET WITH NEONS

- Double pole switches
- 13A switched socket
- Minimum mounting box depth: 47mm

Code	Finish	Insert
FPR83MNBC	Brushed Chrome	Black
FPR83MNBCG	Brushed Chrome	Grey
FPR83MNBCW	Brushed Chrome	White
FPR83MNGM	Gunmetal	Black
FPR83MNPB	Polished Brass	Black
FPR83MNPLW	Pearl	White
FPR83MNBB	Brushed Brass	Black
FPR83MNPC	Polished Chrome	Black
FPR83MNPCG	Polished Chrome	White
FPR83MNPCW	Polished Chrome	Grey



TV OUTLET

- Coaxial TV Outlet Plates
- Minimum mounting box depth: 25mm

Code	Model	Finish
FP0100BC	Non-Isolated	Brushed Chrome
FP0100GM	Non-Isolated	Gunmetal
FP0100PB	Non-Isolated	Polished Brass
FP0100PL	Non-Isolated	Pearl
FP0100BB	Non-Isolated	Brushed Brass
FP0100PC	Non-Isolated	Polished Chrome





CAT5E NETWORK OUTLETS

- Capable of supporting data transfer speeds of up to 1Gbps over 100m at a maximum bandwidth of 100Mhz
- UTP
- Single shuttered RJ45 Outlet
- Write on designation label
- Minimum mounting box depth: 35mm



Code	Model	Finish
FPRJ45BC	RJ45	Brushed Chrome
FPRJ45PB	RJ45	Polished Brass
FPRJ45PL	RJ45	Pearl
FPRJ45BB	RJ45	Brushed Brass

CAT6A NETWORK OUTLETS

- Capable of supporting data transfer speeds of up to 10Gbps over 100m at a maximum bandwidth of 500Mhz
- Backward compatible with CAT6 and CAT5e
- Enhanced PoE capabilities
- Reduced crosstalk
- UTP
- Single shuttered RJ45 Outlet
- Write on designation label
- Minimum mounting box depth: 35mm



Code	Model	Finish
FPC6BB	RJ45	Brushed Brass
FPC6BC	RJ45	Brushed Chrome

BLANKING PLATES

- Used to neatly cover unused or redundant boxes

Code	Size	Finish
FP8350BC	1G	Brushed Chrome
FP8350GM	1G	Gunmetal
FP8350PB	1G	Polished Brass
FP8350PL	1G	Pearl
FP8350BB	1G	Brushed Brass
FP8350PC	1G	Polished Chrome



BLANKING PLATES

- Used to neatly cover unused or redundant boxes

Code	Size	Finish
FP8360BC	2G	Brushed Chrome
FP8360GM	2G	Gunmetal
FP8360PB	2G	Polished Brass
FP8360PL	2G	Pearl
FP8360BB	2G	Brushed Brass
FP8360PC	2G	Polished Chrome



FLOOR SOCKETS

- 13A rated
- Unswitched
- Spring-loaded cover
- Minimum recessed depth: 35mm
- 1G: 94.5 x 86mm 2G: 94.5 x 144mm

Code	Size	Finish	Insert
FPR7UPBW	1G	Polished Brass	White
FPR7UPCW	1G	Polished Chrome	White
FPR7UBBW	1G	Brushed Brass	White
FPR7UBCW	1G	Brushed Chrome	White
FPR7UMB	1G	Matt Black	Black
FPR9UPBW	2G	Polished Brass	White
FPR9UPCW	2G	Polished Chrome	White
FPR9UBBW	2G	Brushed Brass	White
FPR9UBCW	2G	Brushed Chrome	White
FPR9UMB	2G	Matt Black	Black



MODULAR FLOOR PLATES

- Used to neatly cover unused or redundant boxes

Code	Size	Finish
FPF2GBC	1G	Brushed Chrome
FPF2GMB	1G	Matt Black
FPF2GMW	1G	Matt White
FPF4GBC	2G	Brushed Chrome
FPF4GMB	2G	Matt Black
FPF4GMW	2G	Matt White



MODULAR FRAMES

- For use with 25mm x 50mm and/or 50mm x 50mm euro modules

Code	Size	Finish
FP1GBC	1 Module	Brushed Chrome
FP1GGM	1 Module	Gunmetal
FP1GPB	1 Module	Polished Brass
FP1GPL	1 Module	Pearl
FP1GBB	1 Module	Brushed Brass
FP1GPC	1 Module	Polished Chrome

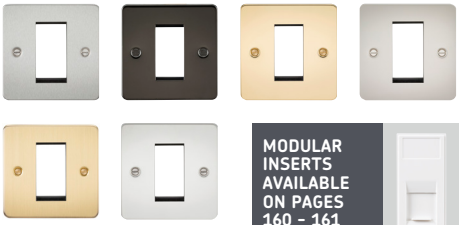

MODULAR INSERTS AVAILABLE ON PAGES 160 - 161



MODULAR FRAMES

- For use with 25mm x 50mm and/or 50mm x 50mm euro modules

Code	Size	Finish
FP2GBC	1-2 Modules	Brushed Chrome
FP2GGM	1-2 Modules	Gunmetal
FP2GPB	1-2 Modules	Polished Brass
FP2GPL	1-2 Modules	Pearl
FP2GBB	1-2 Modules	Brushed Brass
FP2GPC	1-2 Modules	Polished Chrome



MODULAR FRAMES

- For use with 25mm x 50mm and/or 50mm x 50mm euro modules

Code	Size	Finish
FP4GBC	2-4 Modules	Brushed Chrome
FP4GGM	2-4 Modules	Gunmetal
FP4GPB	2-4 Modules	Polished Brass
FP4GPL	2-4 Modules	Pearl
FP4GBB	2-4 Modules	Brushed Brass
FP4GPC	2-4 Modules	Polished Chrome













METAL DECORATIVE SWITCHES & SOCKETS

SCREWLESS

The screwless collection is available in 9 stunning finishes and has a flat plate, slim profile design. Easy to install, and the perfect upgrade to any environment.

USB C 20V | USB A+C 20A 2G Sockets	98 - 99
2G Sockets	100
USB A+C 5V 2G USB Sockets	101
Outboard Rockers	102
1G USB Sockets	103
Nightlight Socket | 1G Unswitched Socket	104
Switched Socket | Round Pin	105
Lockable Socket	106
10A Switches	107
Touchless Switch | Fan Isolator Switch	108
10AX Switches	109 - 110
Toggle Switches	111
Dimmers | Dimming Modules	112 - 114
Fused Spur Units	115 - 116
Shaver Sockets	117 - 118
Key Card Switches | Reading Light with Dual USB Charger	119
20A Switches	120
Flex outlets | Cooker switches	121
45A Switch with Neon	122
Media Outlets	123 - 124
Blanking Plates | Modular Frames	125 - 127
Multimedia Combination Faceplates	128 - 135

DOUBLE POLE SWITCHES

On selected products for additional safety

COLOUR MATCHING

Matching metal rockers with no surround

LONG LASTING

Robust full metal housing



LOW PROFILE DESIGN

Projection of just 4.3mm (including gasket)

UNIQUE SOCKET DESIGN

Socket completely concealed by plug once inserted

TOP-DOWN TERMINATION

L, N and E can all be terminated from the top – ideal when installing multiple outlets

CAPTIVE TERMINALS

Appropriate terminal capacities and captive terminals to prevent screws falling out



INTEGRATED MOISTURE GASKET

Prevents any moisture transfer to decorative front plate

HIGH INTEGRITY EARTHING

Twin earth terminals where appropriate







25 YEAR WARRANTY*

*2 years on electronic products

DIMENSIONS*

Single plate: 87.5mm x 87.5mm
Double plate: 87.5mm x 147.5mm
Projection: 4.3mm

*Unless otherwise stated



High-quality imported components are used in this range, ensuring trouble-free charging and longevity for hospitality areas



	Finish	Style	Insert Options
	Matt White	Matt	
	Anthracite	Matt	
	Smoked Bronze	Matt	
	Matt Black	Matt	
	Brushed Chrome	Metal	
	Polished Chrome	Mirror	
	Black Nickel	Mirror	
	Polished Brass	Mirror	
	Antique Brass	Matt	



13A 2G DP SWITCHED SOCKET WITH DUAL USB-C (20V DC 3.25A) MAX. 65W

- Charge laptops at up to 65W from a single USB-C output
- Fast charge two devices at same time at up to 45W PD and 18W QC
- Double Pole Switches
- Outboard Rockers
- Twin Earths
- Dual USB-C Outputs
- Supports QC, USB-PD and PPS Charging protocols
- Over Voltage CAT III – Suitable for domestic and commercial installations
- Built in overheat and overload protection
- Minimum mounting box depth: 35mm

Code	Finish	Insert
SFR9965AB	Antique Brass	Black
SFR9965AT	Anthracite	Black
SFR9965BC	Brushed Chrome	Black
SFR9965BCG	Brushed Chrome	Grey
SFR9965BCW	Brushed Chrome	White
SFR9965MBB	Matt Black	Black
SFR9965MW	Matt White	White
SFR9965SB	Smoked Bronze	Black



NEW 2-IN-1 240W USB CHARGING CABLES
SEE PAGE 167





13A 2G DP SWITCHED SOCKET WITH DUAL USB A+C (20V DC 2.25A) MAX. 45W

- Charge small laptops and tablets at up to 45W from a single USB-C output
- Fast charge two devices at same time at up to 27W PD and 18W QC
- Double Pole Switches
- Twin Earths
- Dual USB A+C outputs
- Supports USB-PD and QC Charging protocols
- Over Voltage CAT III – Suitable for domestic and commercial installations
- Built in overheat and overload protection
- Minimum mounting box depth: 35mm



Code	Finish	Insert
SFR9945AB	Antique Brass	Black
SFR9945AT	Anthracite	Black
SFR9945BC	Brushed Chrome	Black
SFR9945BCG	Brushed Chrome	Black
SFR9945BCW	Brushed Chrome	White
SFR9945MBB	Matt Black	Black
SFR9945MW	Matt White	White
SFR9945SB	Smoked Bronze	Black

(USB-PD is supported by most Android phones and iPhone15 and above.)



13A 2G DP SWITCHED SOCKETS

- Double pole switch
- Twin Earths
- Minimum mounting box depth: 25mm

Code	Finish	Insert
SFR9000AB	Antique Brass	Black
SFR9000AT	Anthracite	Black
SFR9000BC	Brushed Chrome	Black
SFR9000BCG	Brushed Chrome	Grey
SFR9000BCW	Brushed Chrome	White
SFR9000BN	Black Nickel	Black
SFR9000MBB	Matt Black	Black
SFR9000MW	Matt White	White
SFR9000PB	Polished Brass	Black
SFR9000PBW	Polished Brass	White
SFR9000PC	Polished Chrome	Black
SFR9000PCG	Polished Chrome	Grey
SFR9000PCW	Polished Chrome	White
SFR9000SB	Smoked Bronze	Black



FLIP-DOWN PHONE HOLDER FOR USE WITH DOUBLE SWITCHED SOCKETS WITH USB CHARGING FACILITY AVAILABLE. SEE PAGE 199





13A 2G SP SWITCHED SOCKET WITH DUAL USB A+C (5V DC 4.0A SHARED) MAX. 20W

- Charge portable devices
- Single Pole Switches
- Twin Earths
- Dual USB A+C outputs
- Over Voltage CAT III – Suitable for domestic and commercial installations
- Built in overheat and overload protection
- Minimum mounting box depth: 35mm

Code	Finish	Insert
SFR9940AB	Antique Brass	Black
SFR9940AT	Anthracite	Black
SFR9940BC	Brushed Chrome	Black
SFR9940BCG	Brushed Chrome	Grey
SFR9940BCW	Brushed Chrome	White
SFR9940BN	Black Nickel	Black
SFR9940MBB	Matt Black	Black
SFR9940MW	Matt White	White
SFR9940PB	Polished Brass	Black
SFR9940PBW	Polished Brass	White
SFR9940PC	Polished Chrome	Black
SFR9940PCG	Polished Chrome	Grey
SFR9940PCW	Polished Chrome	White
SFR9940SB	Smoked Bronze	Black



20W
5V DC 4.0A (SHARED)



NEW

13A 2G DP SWITCHED SOCKET WITH OUTBOARD ROCKERS

- Double pole switches
- Twin Earths
- Red Flash on Rocker Switches
- Minimum mounting box depth: 25mm

Code	Finish	Insert	
SFR9001AB	Antique Brass	Black	NEW
SFR9001BC	Brushed Chrome	Black	NEW
SFR9001BCW	Brushed Chrome	White	NEW
SFR9001MBB	Matt Black	Black	NEW
SFR9001MW	Matt White	White	NEW



13A 2G DP SWITCHED SOCKET WITH OUTBOARD ROCKERS WITH DUAL USB A+C (5V DC 4.0A SHARED)

- Charge portable devices
- Double Pole Switches
- Twin Earths
- Red Flash on Rocker Switches
- Dual USB A+C outputs
- Over Voltage CAT III – Suitable for domestic and commercial installations
- Built in overheat and overload protection
- Minimum mounting box depth: 35mm

Code	Finish	Insert	
SFR9941AB	Antique Brass	Black	NEW
SFR9941BC	Brushed Chrome	Black	NEW
SFR9941BCW	Brushed Chrome	White	NEW
SFR9941MBB	Matt Black	Black	NEW
SFR9941MW	Matt White	White	NEW



1G TRIPLE USB CHARGER PLATE (20V DC 3.15A) MAX. 63W

- 230V AC
- 2 x USB-C + 1 x USB-A charging outlets
- Charge laptops at up to 65W from a single USB-C output
- Fast charge two devices at same time at up to 45W PD and 18W QC
- Supports QC, USB-PD and PPS Charging protocols
- Minimum mounting box depth: 35mm



63W FAST CHARGE 20V DC 3.15A

CHARGES LAPTOPS

Code	Finish	Insert
SF63WAB	Antique Brass	Black
SF63WAT	Anthracite	Black
SF63WBCG	Brushed Chrome	Black
SF63WMB	Matt Black	Grey
SF63WMW	Matt White	White

13A 1G SP SWITCHED SOCKET WITH DUAL USB A+C (12V DC 1.5A) MAX. 18W

- Charge portable devices
- Fast charge one device at up to 18W QC or share across both outputs
- Single Pole Switch
- Dual USB A+C outputs
- Supports USB-PD and QC Charging protocols
- Over Voltage CAT III – Suitable for domestic and commercial installations
- Built in overheat and overload protection
- Minimum mounting box depth: 25-35mm depending on wiring conditions (10mm spacer included)



18W FAST CHARGE 12V DC 1.5A

Code	Finish	Insert
SFR9919AB	Antique Brass	Black
SFR9919AT	Anthracite	Black
SFR9919BC	Brushed Chrome	Black
SFR9919BCG	Brushed Chrome	Grey
SFR9919BCW	Brushed Chrome	White
SFR9919MBB	Matt Black	Black
SFR9919MW	Matt White	White
SFR9919SB	Smoked Bronze	Black

(USB-PD is supported by most Android phones and iPhone15 and above.)

NEW 2-IN-1 240W USB CHARGING CABLES
SEE PAGE 167





13A 2G NIGHTLIGHT SOCKET

- Double Pole
- Built in Photocell Nightlight Function
- ON 5-15lx / OFF more than 20-40lx
- Minimum mounting box depth: 25mm

Code	Finish	Insert
SFR9NLAB	Antique Brass	Black
SFR9NLAT	Anthracite	Black
SFR9NLBCG	Brushed Chrome	White
SFR9NLMBB	Matt Black	Black
SFR9NLMW	Matt White	White



13A 1G UNSWITCHED SOCKET

- Minimum mounting box depth: 25mm

Code	Finish	Insert
SFR7000UAB	Antique Brass	Black
SFR7000UAT	Anthracite	Black
SFR7000UBC	Brushed Chrome	Black
SFR7000UBCG	Brushed Chrome	Grey
SFR7000UBCW	Brushed Chrome	White
SFR7000UMB	Matt Black	Black
SFR7000UMW	Matt White	White
SFR7000USB	Smoked Bronze	Black



13A 1G DP SWITCHED SOCKETS

- Minimum mounting box depth: 25mm

Code	Finish	Insert
SFR7000AB	Antique Brass	Black
SFR7000AT	Anthracite	Black
SFR7000BC	Brushed Chrome	Black
SFR7000BCG	Brushed Chrome	Grey
SFR7000BCW	Brushed Chrome	White
SFR7000BN	Black Nickel	Black
SFR7000MBB	Matt Black	Black
SFR7000MW	Matt White	White
SFR7000PB	Polished Brass	Black
SFR7000PBW	Polished Brass	White
SFR7000PC	Polished Chrome	Black
SFR7000PCG	Polished Chrome	Grey
SFR7000PCW	Polished Chrome	White
SFR7000SB	Smoked Bronze	Black



5A ROUND PIN SOCKETS

- Minimum mounting box depth: 25mm

Code	Finish	Insert
SF5AAB	Antique Brass	Black
SF5AAT	Anthracite	Black
SF5ABC	Brushed Chrome	Black
SF5ABCG	Brushed Chrome	Grey
SF5ABCW	Brushed Chrome	White
SF5ABN	Black Nickel	Black
SF5AMB	Matt Black	Black
SF5AMW	Matt White	White
SF5ASB	Smoked Bronze	Black





SFR9LOCKMW

13A DP KEY LOCKABLE SOCKET

- Key lock On or Off (incl. 2 keys)
- Designed to restrict unauthorized use
- Minimum mounting box depth: 35mm

Code	Finish	Insert
SFR9LOCKAB	Antique Brass	Black
SFR9LOCKAT	Anthracite	Black
SFR9LOCKBCW	Brushed Chrome	White
SFR9LOCKMB	Matt Black	Black
SFR9LOCKMW	Matt White	White
SFR9LOCKSB	Smoked Bronze	Black



NEW

1G LIGHT SWITCH ILLUMINATOR

- Creates "halo" glow effect behind switches when light is in the OFF position making it easier to find the light switch in Hotel rooms, bedrooms, storage rooms.
- This device is designed to fit behind most standard 86x86mm size 1G/2G/3G single plate switches and functions with both 1-way, 2-way, and DP switches it can also be used with single sockets if desired.
- This devices fits behind and works with ALL Knightsbridge 1G Switches from our moulded and decorative ranges



Code	Size	Colour Temp	Colour	
1GHALO	1G	3000K	Warm White	**NEW**



COMPATIBLE WITH OUR FULL DECORATIVE RANGE

10AX SWITCHES

- Minimum mounting box depth: 16mm

Code	Size	Model	Finish
SF1200AB	1G	Intermediate	Antique Brass
SF1200AT	1G	Intermediate	Anthracite
SF1200BC	1G	Intermediate	Brushed Chrome
SF1200BN	1G	Intermediate	Black Nickel
SF1200MBB	1G	Intermediate	Matt Black
SF1200MW	1G	Intermediate	Matt White
SF1200PB	1G	Intermediate	Polished Brass
SF1200PC	1G	Intermediate	Polished Chrome
SF1200SB	1G	Intermediate	Smoked Bronze
SF2000AB	1G	2-Way	Antique Brass
SF2000AT	1G	2-Way	Anthracite
SF2000BC	1G	2-Way	Brushed Chrome
SF2000BN	1G	2-Way	Black Nickel
SF2000MBB	1G	2-Way	Matt Black
SF2000MW	1G	2-Way	Matt White
SF2000PB	1G	2-Way	Polished Brass
SF2000PC	1G	2-Way	Polished Chrome
SF2000SB	1G	2-Way	Smoked Bronze



10A 1G DP SWITCHES

- 10AX DP switches are generally used when there are two circuits in a room i.e. a bathroom light and a Fan boost system
- Double pole switch
- Minimum mounting box depth: 16mm

Code	Size	Model	Finish
SF1000DPAB	1G	DP	Antique Brass
SF1000DPAT	1G	DP	Anthracite
SF1000DPBC	1G	DP	Brushed Chrome
SF1000DPMBB	1G	DP	Matt Black
SF1000DPMW	1G	DP	Matt White
SF1000DPSB	1G	DP	Smoked Bronze





1G TOUCHLESS SWITCHES

- Minimum mounting box depth: 16mm
- Gesture controlled (on/off)
- Sensor detection range: 3cm
- Max. load: 500W resistive / 200W inductive / 100W LED
- Minimum mounting box depth: 25mm
- Requires neutral

Code	Finish	Model
SFTS1AT	Anthracite	1-Way
SFTS1BC	Brushed Chrome	1-Way
SFTS1BN	Black Nickel	1-Way
SFTS1MB	Matt Black	1-Way
SFTS1MW	Matt White	1-Way
SFTS1PC	Polished Chrome	1-Way
SFTS1SB	Smoked Bronze	1-Way



10A FAN ISOLATOR SWITCHES

- Triple Pole
- Rated conditional short circuit current (Inc) 1500mA
- Minimum mounting box depth: 16mm

Code	Finish
SF1100AB	Antique Brass
SF1100AT	Anthracite
SF1100BC	Brushed Chrome
SF1100BN	Black Nickel
SF1100MBB	Matt Black
SF1100MW	Matt White
SF1100PB	Polished Brass
SF1100PC	Polished Chrome
SF1100SB	Smoked Bronze





10AX SWITCHES

- Minimum mounting box depth: 16mm

Code	Size	Model	Finish
SF3000AB	2G	2-Way	Antique Brass
SF3000AT	2G	2-Way	Anthracite
SF3000BC	2G	2-Way	Brushed Chrome
SF3000BN	2G	2-Way	Black Nickel
SF3000MBB	2G	2-Way	Matt Black
SF3000MW	2G	2-Way	Matt White
SF3000PB	2G	2-Way	Polished Brass
SF3000PC	2G	2-Way	Polished Chrome
SF3000SB	2G	2-Way	Smoked Bronze



10AX SWITCHES

- Minimum mounting box depth: 16mm

Code	Size	Model	Finish
SF4000AB	3G	2-Way	Antique Brass
SF4000AT	3G	2-Way	Anthracite
SF4000BC	3G	2-Way	Brushed Chrome
SF4000BN	3G	2-Way	Black Nickel
SF4000MBB	3G	2-Way	Matt Black
SF4000MW	3G	2-Way	Matt White
SF4000PB	3G	2-Way	Polished Brass
SF4000PC	3G	2-Way	Polished Chrome
SF4000SB	3G	2-Way	Smoked Bronze



10AX SWITCHES

- Minimum mounting box depth: 16mm

Code	Size	Model	Finish
SF4100AB	4G	2-Way	Antique Brass
SF4100AT	4G	2-Way	Anthracite
SF4100BC	4G	2-Way	Brushed Chrome
SF4100BN	4G	2-Way	Black Nickel
SF4100MBB	4G	2-Way	Matt Black
SF4100MW	4G	2-Way	Matt White
SF4100PB	4G	2-Way	Polished Brass
SF4100PC	4G	2-Way	Polished Chrome
SF4100SB	4G	2-Way	Smoked Bronze



10AX SWITCHES

- Minimum mounting box depth: 16mm

Code	Size	Model	Finish
SF4200AB	6G	2-Way	Antique Brass
SF4200BC	6G	2-Way	Brushed Chrome
SF4200BN	6G	2-Way	Black Nickel
SF4200MBB	6G	2-Way	Matt Black
SF4200MW	6G	2-Way	Matt White
SF4200PB	6G	2-Way	Polished Brass
SF4200PC	6G	2-Way	Polished Chrome
SF4200SB	6G	2-Way	Smoked Bronze





10AX TOGGLE SWITCHES

- Minimum mounting box depth: 16mm

Code	Size	Model	Finish
SF1TOGAB	1G	2-Way	Antique Brass
SF1TOGBC	1G	2-Way	Brushed Chrome
SF1TOGPB	1G	2-Way	Polished Brass
SF12TOGAB	1G	Intermediate	Antique Brass
SF2TOGAB	2G	2-Way	Antique Brass
SF2TOGBC	2G	2-Way	Brushed Chrome
SF2TOGPB	2G	2-Way	Polished Brass
SF3TOGAB	3G	2-Way	Antique Brass
SF4TOGAB	4G	2-Way	Antique Brass



FULL RANGE OF GRID PLATES AND TOGGLE SWITCHES MODULES AVAILABLE ON PAGE 168 – 177





1G 2-WAY INTELLIGENT DIMMERS

- 10-200W (5-150W LED)
- Switch between Trailing Edge* and Leading Edge
- Minimum mounting box depth: 25mm

*Preset in Trailing Edge mode



Code	Finish
SF2191AB	Antique Brass
SF2191AT	Anthracite
SF2191BC	Brushed Chrome
SF2191BN	Black Nickel
SF2191MBB	Matt Black
SF2191MW	Matt White
SF2191PB	Polished Brass
SF2191PC	Polished Chrome
SF2191SB	Smoked Bronze

2G 2-WAY INTELLIGENT DIMMERS

- 10-200W (5-150W LED)
- Switch between Trailing Edge* and Leading Edge
- Minimum mounting box depth: 25mm

*Preset in Trailing Edge mode



Code	Finish
SF2192AB	Antique Brass
SF2192AT	Anthracite
SF2192BC	Brushed Chrome
SF2192BN	Black Nickel
SF2192MBB	Matt Black
SF2192MW	Matt White
SF2192PB	Polished Brass
SF2192PC	Polished Chrome
SF2192SB	Smoked Bronze

3G 2-WAY INTELLIGENT DIMMERS

- 10-200W (5-150W LED)
- Switch between Trailing Edge* and Leading Edge
- Minimum mounting box depth: 25mm

*Preset in Trailing Edge mode

Code	Finish
SF2193AB	Antique Brass
SF2193AT	Anthracite
SF2193BC	Brushed Chrome
SF2193BN	Black Nickel
SF2193MBB	Matt Black
SF2193MW	Matt White
SF2193PB	Polished Brass
SF2193PC	Polished Chrome
SF2193SB	Smoked Bronze



4G 2-WAY INTELLIGENT DIMMERS

- 10-200W (5-150W LED)
- Switch between Trailing Edge* and Leading Edge
- Minimum mounting box depth: 25mm

*Preset in Trailing Edge mode

Code	Finish
SF2194AB	Antique Brass
SF2194AT	Anthracite
SF2194BC	Brushed Chrome
SF2194BN	Black Nickel
SF2194MBB	Matt Black
SF2194MW	Matt White
SF2194PB	Polished Brass
SF2194PC	Polished Chrome
SF2194SB	Smoked Bronze



DIMMER UNPOPULATED PLATES

- 1G dimmer plate and matching dimmer cap
- Unpopulated
- Low Profile Flat Plate design with built in gasket
- Suitable for use with centre or offset dimmer modules

Code	Finish
SF1DIMAB	Antique Brass
SF1DIMAT	Anthracite
SF1DIMBC	Brushed Chrome
SF1DIMBN	Black Nickel
SF1DIMMBB	Matt Black
SF1DIMMW	Matt White
SF1DIMPB	Polished Brass
SF1DIMPC	Polished Chrome
SF1DIMSB	Smoked Bronze



DIMMER MODULES

- 2-Way
- Leading Edge, Trailing Edge, and Intelligent options that can switch between both modes.
- Minimum mounting box depth: 25mm
- Build your own dimmer solution with our unpopulated dimmer plates
- Minimum mounting box depth: 35mm



Code	Max. Load	Mode
SN400M	40-400W (3-100W LED)	Leading Edge
VFR200I	10-200W (5-150W LED)	Intelligent Trailing/ Leading Edge
CU110V	6A 2-Way	1-10V*
CU150I	5-400W (5-150W LED)	Intelligent Trailing/ Leading Edge*

* Dimmer supplied with Curved Edge Grid Adaptor Plate

NEW

DECORATIVE SOLID METAL DIMMER CAP

- 20x15mm
- Add a touch of luxury to your dimmer by adding a Deco Metal Dimmer Cap

Construction: Aluminium

Code	Finish	
DIMDAB	Antique Brass	NEW
DIMDBB	Brushed Brass	NEW
DIMDBC	Brushed Chrome	NEW
DIMDMB	Matt Black	NEW





SF6000BC

FUSED SPUR UNITS

- 13A rated
- Double pole switches where applicable
- Minimum mounting box depth: 25mm



Code	Model	Finish
SF6000AB	Unswitched	Antique Brass
SF6000AT	Unswitched	Anthracite
SF6000BC	Unswitched	Brushed Chrome
SF6000BN	Unswitched	Black Nickel
SF6000MBB	Unswitched	Matt Black
SF6000MW	Unswitched	Matt White
SF6000PB	Unswitched	Polished Brass
SF6000PC	Unswitched	Polished Chrome
SF6000SB	Unswitched	Smoked Bronze

SWITCHED FUSED SPURS

- 13A rated
- Double pole switches where applicable
- Minimum mounting box depth: 25mm



Code	Model	Finish
SF6300AB	Switched	Antique Brass
SF6300AT	Switched	Anthracite
SF6300BC	Switched	Brushed Chrome
SF6300BN	Switched	Black Nickel
SF6300MBB	Switched	Matt Black
SF6300MW	Switched	Matt White
SF6300PB	Switched	Polished Brass
SF6300PC	Switched	Polished Chrome
SF6300SB	Switched	Smoked Bronze



SF6300NBN

SWITCHED FUSED SPURS

- 13A rated
- Double pole switches where applicable
- Minimum mounting box depth: 25mm



Code	Model	Finish
SF6300NAB	Switched + Neon	Antique Brass
SF6300NAT	Switched + Neon	Anthracite
SF6300NBC	Switched + Neon	Brushed Chrome
SF6300NBN	Switched + Neon	Black Nickel
SF6300NMBB	Switched + Neon	Matt Black
SF6300NMW	Switched + Neon	Matt White
SF6300NPB	Switched + Neon	Polished Brass
SF6300NPC	Switched + Neon	Polished Chrome
SF6300NSB	Switched + Neon	Smoked Bronze

SWITCHED FUSED SPURS

- 13A rated
- Double pole switches where applicable
- Minimum mounting box depth: 25mm



Code	Model	Finish
SF6300FAB	Switched + Neon + Flex	Antique Brass
SF6300FAT	Switched + Neon + Flex	Anthracite
SF6300FBC	Switched + Neon + Flex	Brushed Chrome
SF6300FBN	Switched + Neon + Flex	Black Nickel
SF6300FMBB	Switched + Neon + Flex	Matt Black
SF6300FMW	Switched + Neon + Flex	Matt White
SF6300FPC	Switched + Neon + Flex	Polished Chrome
SF6300FSB	Switched + Neon + Flex	Smoked Bronze



230V SHAVER SOCKET WITH DUAL USB A+C (5V DC 2.4A SHARED) MAX. 12W

- 230VAC 20VA
- Built in dual USB A+C charger ideal for charging bathroom accessories
- Minimum mounting box depth: 47mm

Code	Finish	Insert
SF8909AB	Antique Brass	Black
SF8909AT	Anthracite	Black
SF8909BC	Brushed Chrome	Black
SF8909BCG	Brushed Chrome	Grey
SF8909BCW	Brushed Chrome	White
SF8909BN	Black Nickel	Black
SF8909MB	Matt Black	Black
SF8909MW	Matt White	White
SF8909PC	Polished Chrome	Black
SF8909PCG	Polished Chrome	Grey
SF8909PCW	Polished Chrome	White
SF8909SB	Smoked Bronze	Black



12W
5V DC 2.4A (SHARED)

230V 50Hz



DUAL VOLTAGE SHAVER SOCKETS

- 115/230V 20VA rated
- IP41 rated
- Minimum mounting box depth: 47mm

Code	Finish	Insert
SF8900AB	Antique Brass	Black
SF8900AT	Anthracite	Black
SF8900BC	Brushed Chrome	Black
SF8900BCG	Brushed Chrome	Grey
SF8900BCW	Brushed Chrome	White
SF8900BN	Black Nickel	Black
SF8900MB	Matt Black	Black
SF8900MW	Matt White	White
SF8900PB	Polished Brass	Black
SF8900PBW	Polished Brass	White
SF8900PC	Polished Chrome	Black
SF8900PCG	Polished Chrome	Grey
SF8900PCW	Polished Chrome	White
SF8900SB	Smoked Bronze	Black



115/230V

IP41

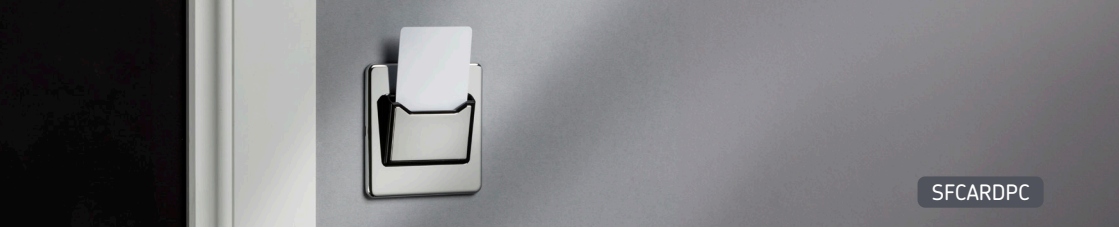

32A KEY CARD SWITCH

- 32A rated
- Backlit arrow to aid activation in darkness
- Minimum mounting box depth: 47mm

Code	Finish
SFCARDAB	Antique Brass
SFCARDAT	Anthracite
SFCARDBC	Brushed Chrome
SFCARDBN	Black Nickel
SFCARDMB	Matt Black
SFCARDMW	Matt White
SFCARDPC	Polished Chrome
SFCARDSB	Smoked Bronze





230V LED DIMMABLE READING LIGHT WITH DUAL USB A+A (5V DC 2.4A SHARED)

- 2W LED reading light
- ON/OFF and touch dimming control on head unit
- Dual USB charger A+A (5V DC 2.4A shared)
- Minimum mounting depth: 25-35mm depending on wiring condition

Code	Finish
SFRLAT	Anthracite
SFRLBC	Brushed Chrome
SFRLMB	Matt Black
SFRLMW	Matt White





20A SWITCHES

- Double pole switches
- Minimum mounting box depth: 25mm

Code	Model	Finish
SF8341AB	Switched	Antique Brass
SF8341AT	Switched	Anthracite
SF8341BC	Switched	Brushed Chrome
SF8341BN	Switched	Black Nickel
SF8341MBB	Switched	Matt Black
SF8341MW	Switched	Matt White
SF8341PB	Switched	Polished Brass
SF8341PC	Switched	Polished Chrome
SF8341SB	Switched	Smoked Bronze



20A SWITCHES

- Double pole switches
- Minimum mounting box depth: 25mm

Code	Model	Finish
SF8341NAB	Switched + Neon	Antique Brass
SF8341NAT	Switched + Neon	Anthracite
SF8341NBC	Switched + Neon	Brushed Chrome
SF8341NBN	Switched + Neon	Black Nickel
SF8341NMBB	Switched + Neon	Matt Black
SF8341NMW	Switched + Neon	Matt White
SF8341NPB	Switched + Neon	Polished Brass
SF8341NPC	Switched + Neon	Polished Chrome
SF8341NSB	Switched + Neon	Smoked Bronze



20A FLEX OUTLET PLATE

- Suitable for cables up to 10mm diameter
- Cable strain relief fitted
- Twin Earth Terminals

Code	Finish
SF8342AB	Antique Brass
SF8342AT	Anthracite
SF8342BC	Brushed Chrome
SF8342MB	Matt Black
SF8342MW	Matt White
SF8342SB	Smoked Bronze





45A DP SWITCH AND 13A SWITCHED SOCKET WITH NEONS

- Double pole switches
- 13A switched socket
- Minimum mounting box depth: 47mm

Code	Finish	Insert
SFR83MNAB	Antique Brass	Black
SFR83MNAT	Anthracite	Black
SFR83MNBC	Brushed Chrome	Black
SFR83MNBCG	Brushed Chrome	Grey
SFR83MNBCW	Brushed Chrome	White
SFR83MNBN	Black Nickel	Black
SFR83MNMBB	Matt Black	Black
SFR83MNMW	Matt White	White
SFR83MNPB	Polished Brass	Black
SFR83MNPBW	Polished Brass	White
SFR83MNPC	Polished Chrome	Black
SFR83MNPCG	Polished Chrome	Grey
SFR83MNPCW	Polished Chrome	White
SFR83MNSB	Smoked Bronze	Black



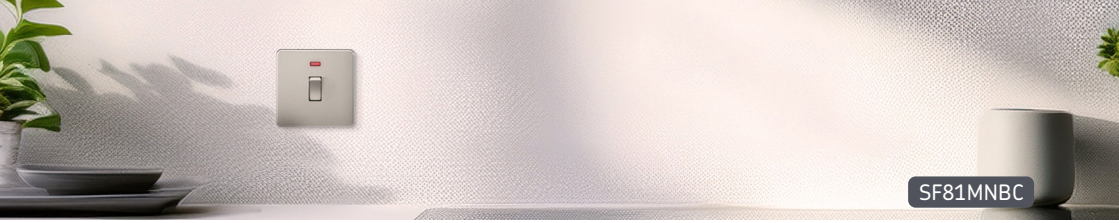

45A COOKER SWITCHES

- Double pole switches
- Minimum mounting box depth: 47mm

Code	Model	Finish
SF81MNAB	Switched + Neon	Antique Brass
SF81MNAT	Switched + Neon	Anthracite
SF81MNBC	Switched + Neon	Brushed Chrome
SF81MNBN	Switched + Neon	Black Nickel
SF81MNMBB	Switched + Neon	Matt Black
SF81MNMW	Switched + Neon	Matt White
SF81MNPB	Switched + Neon	Polished Brass
SF81MNPC	Switched + Neon	Polished Chrome
SF81MNSB	Switched + Neon	Smoked Bronze



45A COOKER SWITCHES

- Double pole switches
- Minimum mounting box depth: 47mm

Code	Model	Finish
SF82MNAB	Switched + Neon	Antique Brass
SF82MNAT	Switched + Neon	Anthracite
SF82MNBC	Switched + Neon	Brushed Chrome
SF82MNBN	Switched + Neon	Black Nickel
SF82MNMBB	Switched + Neon	Matt Black
SF82MNMW	Switched + Neon	Matt White
SF82MNPB	Switched + Neon	Polished Brass
SF82MNPC	Switched + Neon	Polished Chrome
SF82MNSB	Switched + Neon	Smoked Bronze



TV OUTLET

- Minimum mounting box depth: 25mm

Code	Model	Finish
SF0100AB	Non-isolated	Antique Brass
SF0100AT	Non-isolated	Anthracite
SF0100BC	Non-isolated	Brushed Chrome
SF0100BN	Non-isolated	Black Nickel
SF0100MB	Non-isolated	Matt Black
SF0100MW	Non-isolated	Matt White
SF0100PB	Non-isolated	Polished Brass
SF0100PC	Non-isolated	Polished Chrome
SF0100SB	Non-isolated	Smoked Bronze



SAT TV OUTLET

- Minimum mounting box depth: 25mm

Code	Model	Finish
SF0150AT	Non-isolated	Anthracite
SF0150BC	Non-isolated	Brushed Chrome
SF0150BN	Non-isolated	Black Nickel
SF0150MW	Non-isolated	Matt White
SF0150PB	Non-isolated	Polished Brass
SF0150PC	Non-isolated	Polished Chrome
SF0150SB	Non-isolated	Smoked Bronze



TV AND SAT TV OUTLET

- Minimum mounting box depth: 25mm

Code	Model	Finish
SF0140BC	Isolated	Brushed Chrome
SF0140BN	Isolated	Black Nickel
SF0140MB	Isolated	Matt Black
SF0140PC	Isolated	Polished Chrome



CAT5E NETWORK OUTLETS

- Capable of supporting data transfer speeds of up to 1Gbps over 100m at a maximum bandwidth of 100Mhz
- UTP
- Single shuttered RJ45 Outlet
- Write on designation label
- Minimum mounting box depth: 35mm

Code	Model	Finish
SFRJ45AB	RJ45	Antique Brass
SFRJ45AT	RJ45	Anthracite
SFRJ45BC	RJ45	Brushed Chrome
SFRJ45BN	RJ45	Black Nickel
SFRJ45MB	RJ45	Matt Black
SFRJ45MW	RJ45	Matt White
SFRJ45PB	RJ45	Polished Brass
SFRJ45SB	RJ45	Smoked Bronze



CAT6A NETWORK OUTLETS

- Capable of supporting data transfer speeds of up to 10Gbps over 100m at a maximum bandwidth of 500Mhz
- Backward compatible with CAT6 and CAT5e
- Enhanced PoE capabilities
- Reduced crosstalk
- UTP
- Single shuttered RJ45 Outlet
- Write on designation label
- Minimum mounting box depth: 35mm

Code	Model	Finish
SFC6AB	RJ45	Antique Brass
SFC6AT	RJ45	Anthracite
SFC6BC	RJ45	Brushed Chrome
SFC6BN	RJ45	Black Nickel
SFC6MB	RJ45	Matt Black
SFC6MW	RJ45	Matt White
SFC6SB	RJ45	Smoked Bronze



TELEPHONE SOCKETS

- Single shuttered Outlet
- Minimum mounting box depth: 25mm

Code	Model	Finish
SF7300BC	Master	Brushed Chrome
SF7300BN	Master	Black Nickel
SF7300MB	Master	Matt Black
SF7300PC	Master	Polished Chrome
SF7400MB	Extension	Matt Black
SF7400PC	Extension	Polished Chrome





BLANKING PLATES

- Used to neatly cover unused or redundant boxes

Code	Size	Finish
SF8350AB	1G	Antique Brass
SF8350AT	1G	Anthracite
SF8350BC	1G	Brushed Chrome
SF8350BN	1G	Black Nickel
SF8350MB	1G	Matt Black
SF8350MW	1G	Matt White
SF8350PB	1G	Polished Brass
SF8350PC	1G	Polished Chrome
SF8350SB	1G	Smoked Bronze



BLANKING PLATES

- Used to neatly cover unused or redundant boxes

Code	Size	Finish
SF8360AB	2G	Antique Brass
SF8360AT	2G	Anthracite
SF8360BC	2G	Brushed Chrome
SF8360BN	2G	Black Nickel
SF8360MB	2G	Matt Black
SF8360MW	2G	Matt White
SF8360PB	2G	Polished Brass
SF8360PC	2G	Polished Chrome
SF8360SB	2G	Smoked Bronze





MODULAR FRAMES

- For use with 25x50mm and/or 50x50mm euro modules (see pages 160-164)

Code	Model	Finish	
SF1GAB	1 Module	Antique Brass	NEW
SF1GAT	1 Module	Anthracite	
SF1GBC	1 Module	Brushed Chrome	
SF1GBN	1 Module	Black Nickel	
SF1GMB	1 Module	Matt Black	
SF1GMW	1 Module	Matt White	
SF1GPB	1 Module	Polished Brass	
SF1GPC	1 Module	Polished Chrome	
SF1GSB	1 Module	Smoked Bronze	



MODULAR FRAMES

- For use with 25x50mm and/or 50x50mm euro modules (see pages 162-164)

Code	Model	Finish
SF2GAB	1-2 Modules	Antique Brass
SF2GAT	1-2 Modules	Anthracite
SF2GBC	1-2 Modules	Brushed Chrome
SF2GBN	1-2 Modules	Black Nickel
SF2GMB	1-2 Modules	Matt Black
SF2GMW	1-2 Modules	Matt White
SF2GPB	1-2 Modules	Polished Brass
SF2GPC	1-2 Modules	Polished Chrome
SF2GSB	1-2 Modules	Smoked Bronze



MODULAR FRAMES

- For use with 25x50mm and/or 50x50mm euro modules (see pages 160-164)

Code	Model	Finish
SF4GAB	2-4 Modules	Antique Brass
SF4GAT	2-4 Modules	Anthracite
SF4GBC	2-4 Modules	Brushed Chrome
SF4GBN	2-4 Modules	Black Nickel
SF4GMB	2-4 Modules	Matt Black
SF4GMW	2-4 Modules	Matt White
SF4GPB	2-4 Modules	Polished Brass
SF4GPC	2-4 Modules	Polished Chrome
SF4GSB	2-4 Modules	Smoked Bronze



MODULAR FRAMES

- For use with 25x50mm and/or 50x50mm euro modules (see pages 160-164)

Code	Model	Finish
SF6GAT	2-4 Modules	Anthracite
SF6GBC	2-4 Modules	Brushed Chrome
SF6GBN	2-4 Modules	Black Nickel
SF6GMB	2-4 Modules	Matt Black
SF6GMW	2-4 Modules	Matt White
SF6GPB	2-4 Modules	Polished Brass
SF6GPC	2-4 Modules	Polished Chrome
SF6GSB	2-4 Modules	Smoked Bronze

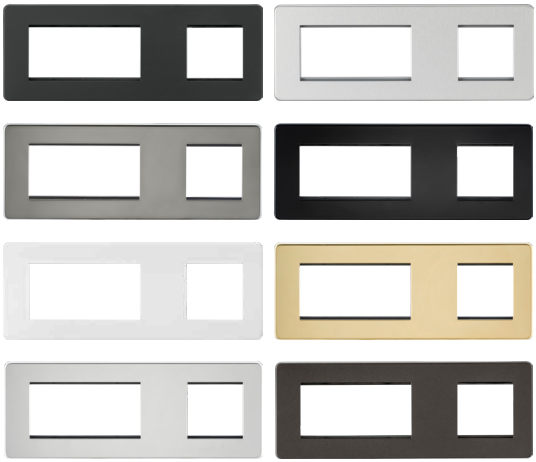

MODULAR INSERTS AVAILABLE
SEE PAGES 160-164



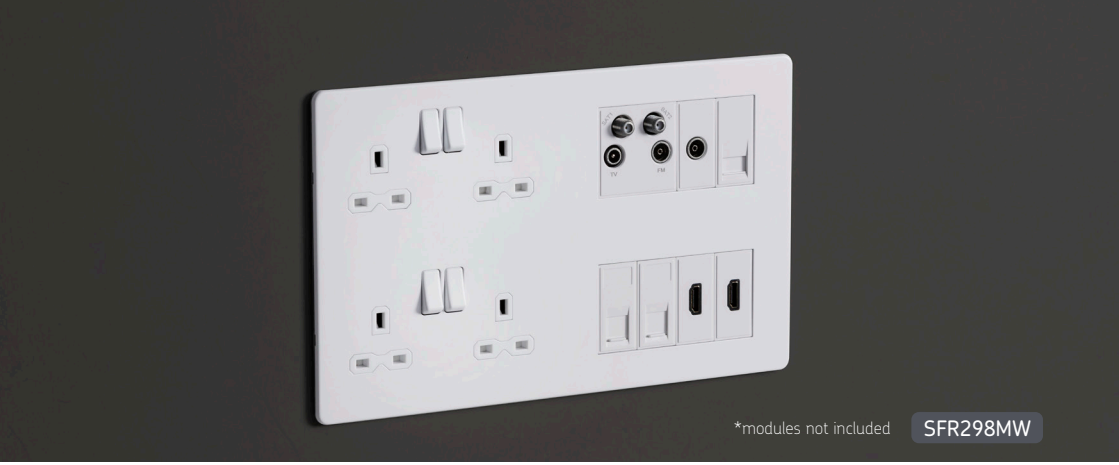

*modules not included

SFR298MW

MULTIMEDIA COMBINATION PLATE

- 2 x 13A 2G DP Switched Sockets
- 2 x 4G modular positions (accepts up to 8 x 25x50mm euro modules)
- Over Voltage CAT III – suitable for domestic or commercial installations
- Twin Earths on each double socket position
- Overall Size: (H)179.9mm x (W) 297.5mm [Use back box GSK298MM)
- Minimum mounting box depth: 47mm

Code	Finish	Insert
SFR298AB	Antique Brass	Black
SFR298AT	Anthracite	Black
SFR298BC	Brushed Chrome	Black
SFR298BCG	Brushed Chrome	Grey
SFR298BCW	Brushed Chrome	White
SFR298MW	Matt White	White
SFR298MBB	Matt Black	Black
SFR298SB	Smoked Bronze	Black

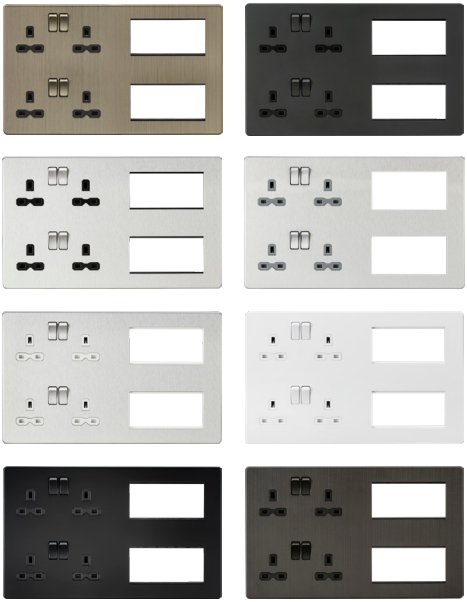

MODULAR INSERTS AVAILABLE
SEE PAGES 160-164





MULTIMEDIA COMBINATION PLATE WITH DUAL USB A+C (12V DC 1.5A) MAX. 18W

- 1 x 13A 2G DP Switched Socket
- 1 x 13A 2G SP Switched socket with Dual USB A+C (12V DC 1.5A) Max. 18W
- 2 x 4G modular positions (accepts up to 8 x 25x50mm euro modules)
- Charge portable devices or gaming accessories
- Dual USB A+C outputs
- Supports USB-PD and QC Charging protocols
- Fast charge one device at up to 18W QC or share across both outputs
- Built in overheat and overload protection
- Over Voltage CAT III – suitable for domestic or commercial installations
- Twin Earths on each double socket position
- Overall Size: (H)179.9mm x (W) 297.5mm [Use back box GSK298MM)
- Minimum mounting box depth: 47mm

Code	Finish	Insert
SFR998AT	Anthracite	Black
SFR998BC	Brushed Chrome	Black
SFR998BCG	Brushed Chrome	Grey
SFR998BCW	Brushed Chrome	White
SFR998MBB	Matt Black	Black
SFR998SB	Smoked Bronze	Black

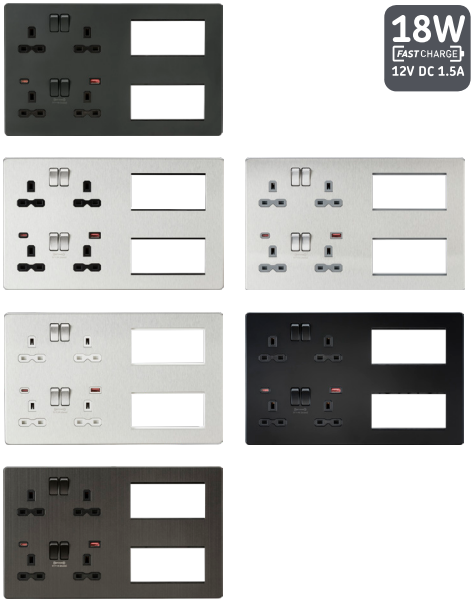

USE GSK298MM 47MM GALVANISED STEEL BOX FOR COMBINATION MULTIMEDIA PLATE. SEE PAGE 193





*modules not included SFR194MW

HALF SIZE MULTIMEDIA COMBINATION PLATE

- 1 x 13A 2G DP Switched Sockets
- 1 x 4G modular positions (accepts up to 4 x 25x50mm euro modules)
- Over Voltage CAT III – suitable for domestic or commercial installations
- Twin Earths on each double socket position
- Overall Size: (H)179.9mm x (W) 147.5mm (Use back box GSK194MM)
- Minimum mounting box depth: 47mm

Code	Finish	Insert
SFR194AB	Antique Brass	Black
SFR194AT	Anthracite	Black
SFR194BC	Brushed Chrome	Black
SFR194BCG	Brushed Chrome	Grey
SFR194BCW	Brushed Chrome	White
SFR194MW	Matt White	White
SFR194MBB	Matt Black	Black
SFR194SB	Smoked Bronze	Black



USE GSK194MM 47MM GALVANISED STEEL BOX FOR SMALL COMBINATION MULTIMEDIA PLATE.
SEE PAGE 193





HALF SIZE MULTIMEDIA COMBINATION PLATE WITH DUAL USB A+C (12V DC 1.5A) MAX. 18W

- 1 x 13A 2G SP Switched socket with Dual USB A+C (12V DC 1.5A) Max. 18W
- 1 x 4G modular positions (accepts up to 4 x 25x50mm euro modules)
- Charge portable devices or gaming accessories
- Dual USB A+C outputs
- Supports USB-PD and QC Charging protocols
- Fast charge one device at up to 18W QC or share across both outputs
- Built in overheat and overload protection
- Over Voltage CAT III – suitable for domestic or commercial installations
- Twin Earths
- Overall Size: (H)179.9mm x (W) 147.5mm (Use back box GSK194MM)
- Minimum mounting box depth: 47mm

Code	Finish	Insert
SFR994AT	Anthracite	Black
SFR994BC	Brushed Chrome	Black
SFR994BCG	Brushed Chrome	Grey
SFR994BCW	Brushed Chrome	White
SFR994MW	Matt White	White
SFR994MBB	Matt Black	Black
SFR994SB	Smoked Bronze	Black

(USB-PD is supported by most Android phones and iPhone15 and above.)



MODULAR INSERTS AVAILABLE SEE PAGES 160-164





RIGHT HAND 2G SOCKET & 2G MODULAR COMBINATION

- 1 x 13A 2G DP Switched Sockets
- 1 x 2G modular positions (accepts up to 2 x 25x50mm euro modules)
- Over Voltage CAT III – suitable for domestic or commercial installations
- Twin Earths on each double socket position
- Overall Size: (H)87.5mm x (W) 235mm (Use back box GSK335D or GSK347D)
- Minimum mounting box depth: 35-47mm depending on inserts

Code	Finish	Insert
SFR192RAB	Antique Brass	Black
SFR192RAT	Anthracite	Black
SFR192RBC	Brushed Chrome	Black
SFR192RBCG	Brushed Chrome	Grey
SFR192RBCW	Brushed Chrome	White
SFR192RMW	Matt White	White
SFR192RMBB	Matt Black	Black
SFR192RSB	Smoked Bronze	Black



USE GSK335D OR GSK347D BACK BOXES
SEE PAGE 193





*modules not included SFR992RBCG+NETDITVGY

RIGHT HAND 2G SOCKET & 2G MODULAR COMBINATION WITH DUAL USB A+C (12V DC 1.5A) MAX. 18W

- 1 x 13A 2G SP Switched socket with Dual USB A+C (12V DC 1.5A) Max. 18W
- 1 x 2G modular positions (accepts up to 2 x 25x50mm euro modules)
- Charge portable devices or gaming accessories
- Dual USB A+C outputs
- Supports USB-PD and QC Charging protocols
- Fast charge one device at up to 18W QC or share across both outputs
- Built in overheat and overload protection
- Over Voltage CAT III – suitable for domestic or commercial installations
- Twin Earths
- Overall Size: (H)87.5mm x (W) 235mm (Use back box GSK335D or GSK347D)
- Minimum mounting box depth: 35-47mm depending on inserts

Code	Finish	Insert
SFR992RAT	Anthracite	Black
SFR992RBC	Brushed Chrome	Black
SFR992RBCG	Brushed Chrome	Grey
SFR992RMW	Matt White	White
SFR992RMBB	Matt Black	Black
SFR992RSB	Smoked Bronze	Black

(USB-PD is supported by most Android phones and iPhone15 and above.)



18W FAST CHARGE 12V DC 1.5A

NEW 2-IN-1 240W USB CHARGING CABLES SEE PAGE 167





*modules not included

SFR192LAB + NETPIRSBK

LEFT HAND 2G SOCKET & 2G MODULAR COMBINATION

- 1 x 13A 2G DP Switched Sockets
- 1 x 2G modular positions (accepts up to 2 x 25x50mm euro modules)
- Over Voltage CAT III – suitable for domestic or commercial installations
- Twin Earths
- Overall Size: (H)87.5mm x (W) 235mm (Use back box GSK335D or GSK347D)
- Minimum mounting box depth: 35-47mm depending on inserts

Code	Finish	Insert
SFR192LAB	Antique Brass	Black
SFR192LAT	Anthracite	Black
SFR192LBC	Brushed Chrome	Black
SFR192LBCG	Brushed Chrome	Grey
SFR192LBCW	Brushed Chrome	White
SFR192LMW	Matt White	White
SFR192LMBB	Matt Black	Black
SFR192LSB	Smoked Bronze	Black



USE GSK335D OR GSK347 BACK BOXES
SEE PAGE 193





*modules not included

SFR992LMBB+2xNET2BK

LEFT HAND 2G SOCKET & 2G MODULAR COMBINATION WITH DUAL USB A+C (12V DC 1.5A) MAX.18W

- 1 x 13A 2G SP Switched socket with Dual USB A+C (12V DC 1.5A) Max. 18W
- 1 x 2G modular positions (accepts up to 2 x 25x50mm euro modules)
- Charge portable devices or gaming accessories
- Dual USB A+C outputs
- Supports USB-PD and QC Charging protocols
- Fast charge one device at up to 18W QC or share across both outputs
- Built in overheat and overload protection
- Over Voltage CAT III – suitable for domestic or commercial installations
- Twin Earths
- Overall Size: (H)87.5mm x (W) 235mm (Use back box GSK335D or GSK347D)
- Minimum mounting box depth: 35-47mm depending on inserts

Code	Finish	Insert
SFR992LAT	Anthracite	Black
SFR992LBC	Brushed Chrome	Black
SFR992LBCG	Brushed Chrome	Grey
SFR992LMW	Matt White	White
SFR992LMBB	Matt Black	Black
SFR992LSB	Smoked Bronze	Black

(USB-PD is supported by most Android phones and iPhone15 and above.)



18W FAST CHARGE 12V DC 1.5A

NEW 2-IN-1 240W USB CHARGING CABLES SEE PAGE 167




FAST









SPECIALIST SOCKETS

The specialist range offers convenient under cabinet, desktop and worktop power solutions. Ideal for both domestic and commercial settings.

Pop-up Sockets	138 - 139
Surface and Recess Mount Sockets | Pop-up wireless and Dual USB Charger	140
2G Mounting Socket | Corner Mount 2G USB Socket	141



IP54 3G POP UP SOCKET WITH DUAL USB A+C (12V DC 1.5A) MAX. 18W

- Back Lit On/Off switch
- Capable of delivering up to 18W ideal for charging smartphones, 0-50% charge in 30 mins or less
- Supports USB-PD/QC
- Fitted with 2m power cable and BS plug top
- IP54 rated when closed
- Cut out: Ø 90-92mm

IP54

18W FASTCHARGE 12V DC 1.5A

PREWIRED

2 YEAR WARRANTY

Code	Model	Finish
SK9909BC	3G + Dual USB-A+C	Brushed Chrome
SK9909PC	3G + Dual USB-A+C	Polished Chrome
SK9909BN	3G + Dual USB-A+C	Black Nickel





(USB-PD is supported by most Android phones and iPhone15 and above.)

**HOLESAWS AVAILABLE.
SEE PAGE 203**



IP54 POP-UP SOCKETS

- These devices have a secure clip that locks the unit upright when in use
- Units can be closed with items plugged in via the innovative cable management cap and inverted socket positions
- IP54 rated when unit is closed and not in use
- 13A fused
- Back lit ON/OFF rocker
- Fitted with 2m cable and BS plug top
- Cut-out: 90-92mm (allowing a minimum 25mm clearance around the cut hole)
- Mounting board thickness: 10-50mm

Code	Model	Finish
SK006	3G	Black



IP54

PREWIRED

2 YEAR WARRANTY

DESKTOP 13A 2G SOCKET WITH DUAL USB-A (5V DC 2.4A SHARED)

- 230V 50Hz
- Twin Power Outlets
- Backlit On/Off Rocker
- Fused for safety and convenience
- Dual USB-A with separate On/Off
- Fitted with 2m cable (open end)
- Cut out: 18-20mm
- Floats over surface, freeing up valuable desk space

Code	Model	Finish
SK0011	2G + Dual USB-A (5V DC 2.4A)	Matt Silver



IP20

12W 5V DC 2.4A (SHARED)

2 YEAR WARRANTY

NEW 2-IN-1 240W USB CHARGING CABLES SEE PAGE 167





13A RECESS MOUNT SOCKET WITH DUAL USB A+C (5V DC 4.0A) MAX. 20W

- Charge portable devices
- Single Pole Switch
- Dual USB A+C outputs
- Over Voltage CAT III – Suitable for domestic and commercial installations
- Built in overheat and overload protection
- Supplied fitted with 2m cable and BS Plug Top
- Cut out diameter of 112mm (requires at least 79mm of recess space)



IP20 | 20W 5V DC 4.0A (SHARED) | PREWIRED | 2 YEAR WARRANTY

Code	Model
SKR3	Recess Mount Socket With Dual USB A+C (5V DC 4.0A)

13A POP UP RECESS MOUNT SOCKET WITH DUAL USB AND WIRELESS CHARGING (20V DC 1.5A) MAX. 30W

- Dual USB A+C outputs
- Fast charge one device at up to 30W PD or share across both outputs
- Supports wired USB-PD and QC Charging protocols
- Supports wireless QI charging protocol (Max. 10W)
- Built in overheat and overload protection
- Supplied fitted with 2m cable and BS Plug Top
- Fits standard 80mm desk grommet cut outs (requires at least 149.8mm of recess space)



IP20 | 30W FASTCHARGE 20V DC 1.5A | WIRELESS CHARGING | PREWIRED | 2 YEAR WARRANTY

Code	Model
SK0016	Pop Up Socket + Wireless Charger + Dual USB A+C (20V DC 1.5A)

(USB-PD is supported by most Android phones and iPhone15 and above.)



NEW

13A 2G DP UNDER CABINET SOCKET WITH BUILT IN 5W LED STRIP LIGHT

• Mount Under cabinet or Counter top against wall (units have open backs)

IP20

20W 5V DC 4.0A (SHARED)

LAMP INCLUDED

2 YEAR WARRANTY



SKR8L



SKR94L

Code	Model	Dimensions (mm)	Insert	
SKR8L	2G DP	H: 212.5 W: 212.5 P: 73.3	Grey	NEW
SKR94L	2G + Dual USB A+C (5V DC 4.0A)	H: 212.5 W: 212.5 P: 73.3	Grey	NEW

13A 2G MOUNTING SOCKETS

• Mount Under cabinet or Counter top against wall (units have open backs)

IP20

20W 5V DC 4.0A (SHARED)

2 YEAR WARRANTY



SKR008



SKR9



SKR2

Code	Model	Dimensions (mm)	Insert
SKR008	2G DP	H: 77 W: 212 P: 77	Grey
SKR9	2G + Dual USB A+C (5V DC 4.0A)	H: 77 W: 212 P: 77	Grey
SKR2	2G + Dual USB A+C (5V DC 4.0A)	H: 93 W: 211 P: 93	Black




CAT6A







METAL CLAD

Heavy duty switches and sockets finished in a durable powder-coated metal clad finish. Ideal for industrial environments

GREY

2G Sockets | 2G USB Sockets | 13A Switch and Sockets	145
10AX Switch | Fused Spur Units | 20A Switches	146
45A Cooker Switches | Telephone and Network Outlet | Modular Frames | Blanking Plates	147
Grid Faceplates | Modular Frames | Grid Back Boxes | Grid Mounting Frames	148
Grid Wiring Accessories	149 - 150

BLACK

2G Sockets | 2G USB Sockets | 13A Switch and Sockets	153
10AX Switch | Fused Spur Units	154
20A Switches | 45A Cooker Switches | Network Outlet	155
Modular Frames | Blanking Plates | Grid Back Boxes	156
Grid Mounting Frames | Grid Face Plates	157

DOUBLE POLE SWITCHES

On selected products, for additional safety

COLOUR MATCHING BACK BOX



EASY CABLING

Multiple cable access points

DURABLE

Powder-coated surface

TOP-DOWN TERMINATION

L, N and E can all be terminated from the top – ideal when installing multiple outlets



CAPTIVE TERMINALS

Appropriate terminal capacities and captive terminals to prevent screws falling out

HIGH INTEGRITY EARTHING

Twin earthing terminals (on double switched sockets), for compliance with BS7671: 2018 regulation 543-7

---

25 YEAR WARRANTY*

*2 years on electronic products

DIMENSIONS*

Single plate: 82mm x 82mm
Double plate: 82mm x 142mm
Projection: 45mm*

*Unless otherwise stated

High-quality imported components are used in this range, ensuring trouble-free charging and longevity for hospitality areas

13A SOCKETS

- Supplied with back box
- Twin Earth Terminals



30mA RCD TYPE-A LATCHING

Code	Size	Model	Finish
MR9000	2G	DP Switched Socket + Twin Earth	Grey
MR9000N	2G	DP Switched Socket with Neon	Grey
MR9000U	2G	Unswitched Socket + Twin Earth	Grey
M9LOCKN	2G	DP + Key Lockable	Grey
M9RCD	2G	DP RCD Switched Socket - 30mA (Type-A) Projection 50mm	Grey

13A 2G SP SWITCHED SOCKET WITH DUAL USB A-C (5V DC 4.0A) MAX. 20W

- Supplied with back box
- Twin Earth Terminals



20W 5V DC 4.0A (SHARED)

Code	Size	Model	Finish
MR9940	2G	Switched Socket with dual USB C+A (5V DC 4.0A shared)	Grey

13A 1G SOCKETS

- Supplied with back box



12W 5V DC 2.4A (SHARED)

Code	Size	Model	Finish
MR7000U	1G	Unswitched	Grey
MR9124	1G	SP + Dual USB	Grey

13A 1G SOCKETS

- Supplied with back box
- BS 1363-2/EV certified*



EV COMPATIBLE

Code	Size	Model	Finish
MR7000	1G	DP	Grey
MR7000N	1G	DP + Neon	Grey

* BS 1363 sockets can be used for EV charging under specific conditions, they are not ideal for regular use. For improved safety, EV-rated sockets should be prioritised in line with the IET Code of Practice, and dedicated EV chargers considered where possible. Charging equipment should always be inspected and maintained. If in doubt, consult a qualified electrician. for more information please see page 153.

10AX SWITCHES

- Supplied with back box

Code	Model	Finish
M1100	Fan Isolator	Grey
M2000	1G 2-Way	Grey
M3000	2G 2-Way	Grey
M4000	3G 2-Way	Grey



13A FUSED SPUR UNITS

- Supplied with back box

Code	Model	Finish
M6000	Unswitched	Grey
M6000F	Unswitched Fused Spur with Flex Outlet	Grey
M6000N	Unswitched + Neon	Grey
M6000NF	Unswitched Fused Spur with Neon and Flex Outlet	Grey
M6300	Switched	Grey
M6300N	Switched + Neon	Grey
M6300F	Switched + Flex Outlet (Front)	Grey
M6300NF	13A Switched Fused Spur with Neon and Flex Outlet	Grey
M6RCD	Unswitched RCD Type-A (30mA)	Grey



30mA
RCD TYPE-A
LATCHING

20A SWITCHES

- Supplied with back box

Code	Model	Finish
M8341	DP	Grey
M8341N	DP + Neon	Grey
M8341NF	DP + Neon and Flex Outlet	Grey
M8341L	20A DP Lockable Switch	Grey



45A COOKER SWITCHES

- With Neon
- Supplied with back box

Code	Model	Finish
M8331N	1G	Grey
M8332N	2G	Grey



45A DP SWITCH AND 13A DP SOCKET

- With Neons
- Supplied with back box

Code	Model	Finish
MR8333N	2G	Grey



TELEPHONE AND NETWORK OUTLETS

- Supplied with back box

Code	Model	Finish
M7300	Telephone Master	Grey
MRJ45	RJ45 UTP CAT5E	Grey
MC6	UTP CAT6a RJ45 Network Outlet	Grey



BLANKING PLATES

- Back box not included

Code	Model	Finish
M8500	1G	Grey
M8600	2G	Grey



GRID FACEPLATES

- Requires grid mounting frame (sold separately)
- For use with Knightsbridge grid accessories only

Code	Size	Finish
GDFP001M	1G	Grey
GDFP002M	2G	Grey
GDFP003M	3G	Grey
GDFP004M	4G	Grey
GDFP006M	6G	Grey
GDFP008M	8G	Grey

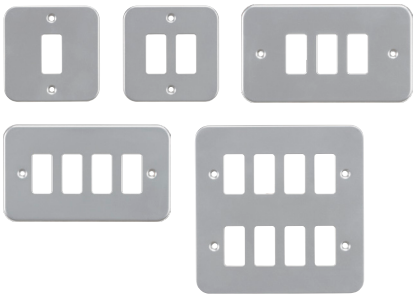

MODULAR FRAMES

- Back box not included

Code	Model	Finish
M1G	1 Module	Grey
M2G	1-2 Modules	Grey
M4G	3-4 Modules	Grey



DURABLE POWDER-COATED GRID BACK BOXES

- 44mm deep
- Fixed mounting lugs
- With earth terminals
- Mix of 20mm knock-out positions

Code	Size	Model	Finish
M8700	1-2G	1 x Earth Terminal	Grey
M8900	3-4G	1 x Earth Terminal	Grey
GDSG68M	6-8G	2 x Earth Terminals	Grey



GRID MOUNTING FRAMES

Code	Size
GDF001F	1-2G
GDF002F	3-4G



20AX GRID SWITCH MODULES

- GDM023 is supplied without rocker - select blank rocker cover from page 176 when ordering

Code	Model	
GDM001U	2-Way SP	
GDM002U	DP	
GDM003U	DP + LED Indicator	
GDM004U	2-Way SP (Centre-Off)	
GDM005U	Intermediate	
GDM006U	2-Way SP Retractive (Marked "PRESS")	
GDM023	20AX 2-Way SP Retractive Grid Switch (Centre Off)	NEW



10A GRID FAN ISOLATOR MODULES

- Triple pole
- Requires one grid position only

Code	Model
GDM020U	Grid Fan Isolator Switch Module
GDM021U	Grid Fan Isolator Key Switch Module (Supplied with Test Key)



20AX GRID KEY SWITCH MODULES

Code	Model
GDM007U	2-Way SP (Marked "EMG LTG TEST")
GDM008U	DP (Marked "EMG LTG TEST")
GDM010U	DP
GDKEY	Spare Key



GRID DIMMERS

- Leading Edge, Trailing Edge, and Intelligent options that can switch between both modes.
- Dummy model for aesthetic matching

Code	Max. Load	Mode
GDM014U	1-Way 10-200W (10-100W LED)	Trailing Edge, press type
GDM150IU	2-Way 10-200W (10-100W LED)	Intelligent Trailing/ Leading Edge
GDM022U	2-Way 6A Dummy switch	



MISCELLANEOUS GRID MODULES

Code	Model
GDM011U	Fuse Holder (13A)
GDM012U	Flex Outlet (max. 10mm)
GDM013U	Blank
GDM017	Indicator - Green
GDM018	Indicator - Red
GDM019	Indicator - Orange
GDM016U	Dual USB-A



12W
5V DC 2.4A
(SHARED)

GRID ROCKER COVERS

- Easy to install
- Replace an existing rocker with an laser or pad printed version indicating the appliance it refers to

Code	Model	
GDBOILU	Boiler	
GDCOFFU	Coffee Machine	
GDCOOKU	Cooker Hood	
GDDISHU	Dishwasher	
GDFANU	Fan	
GDFREEZERU	Freezer	
GDFRIDGEU	Fridge	
GDFRIDU	Fridge Freezer	
GDHOBU	Hob	
GDMICROU	Microwave	
GDOVENU	Oven	
GDDRYU	Tumble Dryer	
GDWARMU	Warming Drawer	
GDWASHU	Washing Machine	
GDWASTEU	Waste Disposal	
GDWINEU	Wine Cooler	
GDBOOSTU	Fan Boost	
GDBLANKU	Blank	NEW



EV COMPATIBILITY

MR7000, MR7000N, MR7000TB, MR7000NTB, OP7N can only be used in their EV charging capacity, when installed using the guidance below:

IET Code of Practice for EV Charging using BS 1363 sockets

The IET Code of Practice for Electric Vehicle Charging Equipment installation provides detailed guidelines for the use of BS 1363 sockets for EV charging. While technically permissible in certain circumstances, these sockets are not the preferred solution.

KEY RECOMMENDATIONS INCLUDE:

DEDICATED CIRCUIT – The BS 1363 socket should be connected to a dedicated circuit, serving no other appliances to reduce the risk of overloading

RESIDUAL CURRENT DEVICE – Recommended the circuit includes a Type B RCD as it detects residual DC currents that can arise during EV charging

PEN LOSS DETECTION – The circuit should include a means of detecting and disconnecting when an open-circuit fault of the neutral (PEN conductor) occurs in a PME system

THERMAL MONITORING – Portable chargers should ideally include thermal monitoring to shut down or alert users if overheating occurs, which is a risk during prolonger EV charging

INSPECTION AND MAINTENANCE – The socket must be in good condition, free from signs of wear, discolouration or damage. Regular inspection is highly recommended to ensure safety and functionality; especially if the socket is used frequently for EV charging

CYCLIC LOAD TESTING COMPLIANCE – Ensure the socket complies with BS 1363-2/EV requirements for the cyclic load testing to handle the repetitive high-current loads associated with EV charging

CHARGING POWER LIMIT – BS 1363 sockets typically support a maximum charging power of 3kW (13A). This rate is slower compared to dedicated EV chargers

BS 1363 sockets can be used for EV charging under specific conditions, they are not ideal for regular use. For improved safety, EV-rated sockets should be prioritised in line with the IET Code of Practice, and dedicated EV chargers considered where possible. Charging equipment should always be inspected and maintained. If in doubt, consult a qualified electrician.

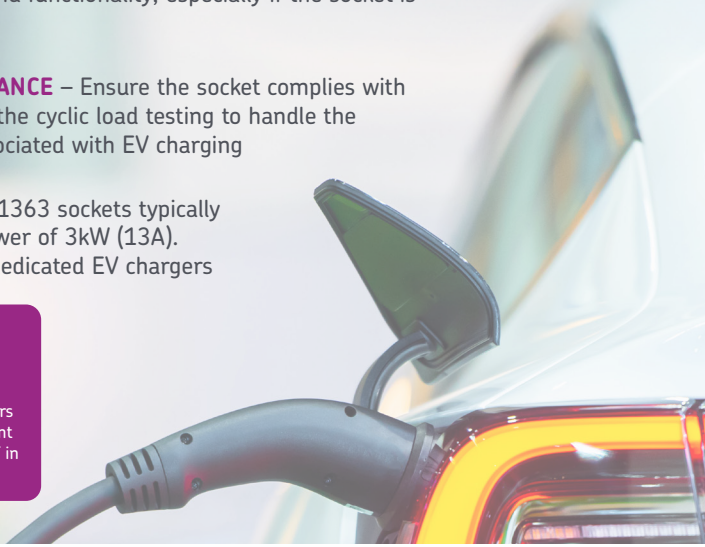

MATT BLACK METAL ROCKER SWITCHES WITH RED FLASHES
On Isolation models

DOUBLE POLE SWITCHES
On selected products, for additional safety

COLOUR MATCHING BACK BOX



EASY CABLING
Multiple cable access points

DURABLE
Powder coated textured sand black finish

TOP-DOWN TERMINATION
L, N and E can all be terminated from the top – ideal when installing multiple outlets



CAPTIVE TERMINALS
Appropriate terminal capacities and captive terminals to prevent screws falling out

HIGH INTEGRITY EARTHING
Twin earthing terminals (on double switched sockets), for compliance with BS7671: 2018 regulation 543-7

25 YEAR WARRANTY*

*2 years on electronic products

DIMENSIONS*

Single plate: 82mm x 82mm
Double plate: 82mm x 142mm
Projection: 45mm*

*Unless otherwise stated

High-quality imported components are used in this range, ensuring trouble-free charging and longevity for hospitality areas



NEW

13A SOCKETS

- Supplied with back box
- Twin Earth Terminals



Code	Size	Model	Finish	
MR9000TB	2G	DP Switched Socket + Twin Earth	Black	NEW
MR9000NTB	2G	DP Switched Socket with Neon	Black	NEW
MR9000UTB	2G	Unswitched Socket + Twin Earth	Black	NEW

13A 2G SP SWITCHED SOCKET WITH DUAL USB A-C (5V DC 4.0A) MAX. 20W

- Supplied with back box
- Twin Earth Terminals



20W 5V DC 4.0A (SHARED)

Code	Size	Model	Finish	
MR9940TB	2G	Switched Socket with dual USB C+A (5V DC 4.0A shared)	Black	NEW

13A 1G SOCKETS

- Supplied with back box



12W 5V DC 2.4A (SHARED)

Code	Size	Model	Finish	
MR7000UTB	1G	Unswitched	Black	NEW

13A 1G SOCKETS

- Supplied with back box
- BS 1363-2/EV certified*



EV COMPATIBLE

Code	Size	Model	Finish	
MR7000TB	1G	DP	Black	NEW
MR7000NTB	1G	DP + Neon	Black	NEW

* BS 1363 sockets can be used for EV charging under specific conditions, they are not ideal for regular use. For improved safety, EV-rated sockets should be prioritised in line with the IET Code of Practice, and dedicated EV chargers considered where possible. Charging equipment should always be inspected and maintained. If in doubt, consult a qualified electrician. for more information please see page 153.



NEW

10AX SWITCHES

- Supplied with back box

Code	Size	Model	Finish	
M1100TB	1G	Fan Isolator	Black	NEW
M2000TB	1G	1G 2-Way	Black	NEW
M3000TB	1G	2G 2-Way	Black	NEW
M4000TB	1G	3G 2-Way	Black	NEW



13A FUSED SPUR UNITS

- Supplied with back box

Code	Size	Model	Finish	
M6000TB	1G	Unswitched	Black	NEW
M6000FTB	1G	Unswitched Fused Spur with Flex Outlet	Black	NEW
M6000NTB	1G	Unswitched + Neon	Black	NEW
M6000NFTB	1G	Unswitched Fused Spur with Neon and Flex Outlet	Black	NEW
M6300TB	1G	Switched	Black	NEW
M6300NTB	1G	Switched + Neon	Black	NEW
M6300FTB	1G	Switched + Flex Outlet (Front)	Black	NEW
M6300NFTB	1G	13A Switched Fused Spur with Neon and Flex Outlet	Black	NEW





NEW

20A SWITCHES

- Supplied with back box



Code	Model	Finish	
M8341TB	DP	Black	NEW
M8341NTB	DP + Neon	Black	NEW
M8341NFTB	DP + Neon and Flex Outlet	Black	NEW

45A COOKER SWITCHES

- With Neon
- Supplied with back box



Code	Model	Finish	
M8331NTB	1G	Black	NEW

45A DP SWITCH AND 13A DP SOCKET

- With Neons
- Supplied with back box



Code	Model	Finish	
MR8333NTB	2G	Black	NEW

NETWORK OUTLETS

- Supplied with back box



Code	Model	Finish	
MC6TB	UTP CAT6a RJ45 Network Outlet	Black	NEW



M4GTB + NETSATSBK + NETTVSBK + NETCAT6BK + NETUSBCBK

NEW

MODULAR FRAMES

- Back box not included



Code	Model	Finish	
M1GTB	1 Module	Black	**NEW**
M2GTB	1-2 Modules	Black	**NEW**
M4GTB	3-4 Modules	Black	**NEW**

BLANKING PLATES

- Back box not included



Code	Model	Finish	
M8500TB	1G	Black	**NEW**
M8600TB	2G	Black	**NEW**

DURABLE POWDER-COATED GRID BACK BOXES

- 44mm deep
- Fixed mounting lugs
- With earth terminals
- Mix of 20mm knockout positions



Code	Size	Model	Finish	
M8700TB	1-2G	1 x Earth Terminal	Black	**NEW**
M8900TB	3-4G	1 x Earth Terminal	Black	**NEW**
GDSG68TB	6-8G	2 x Earth Terminals	Black	**NEW**



NEW

GRID MOUNTING FRAMES

Code	Size
GDF001F	1-2G
GDF002F	3-4G



GRID FACEPLATES

- Requires grid mounting frame (sold separately)
- For use with Knightsbridge grid accessories only

Code	Size	Finish	
GDFP001TB	1G	Black	NEW
GDFP002TB	2G	Black	NEW
GDFP003TB	3G	Black	NEW
GDFP004TB	4G	Black	NEW
GDFP006TB	6G	Black	NEW
GDFP008TB	8G	Black	NEW

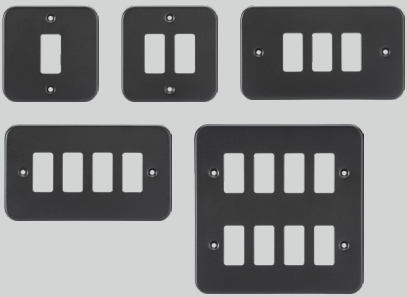

GRID SWITCHES AVAILABLE
SEE PAGES 174-175



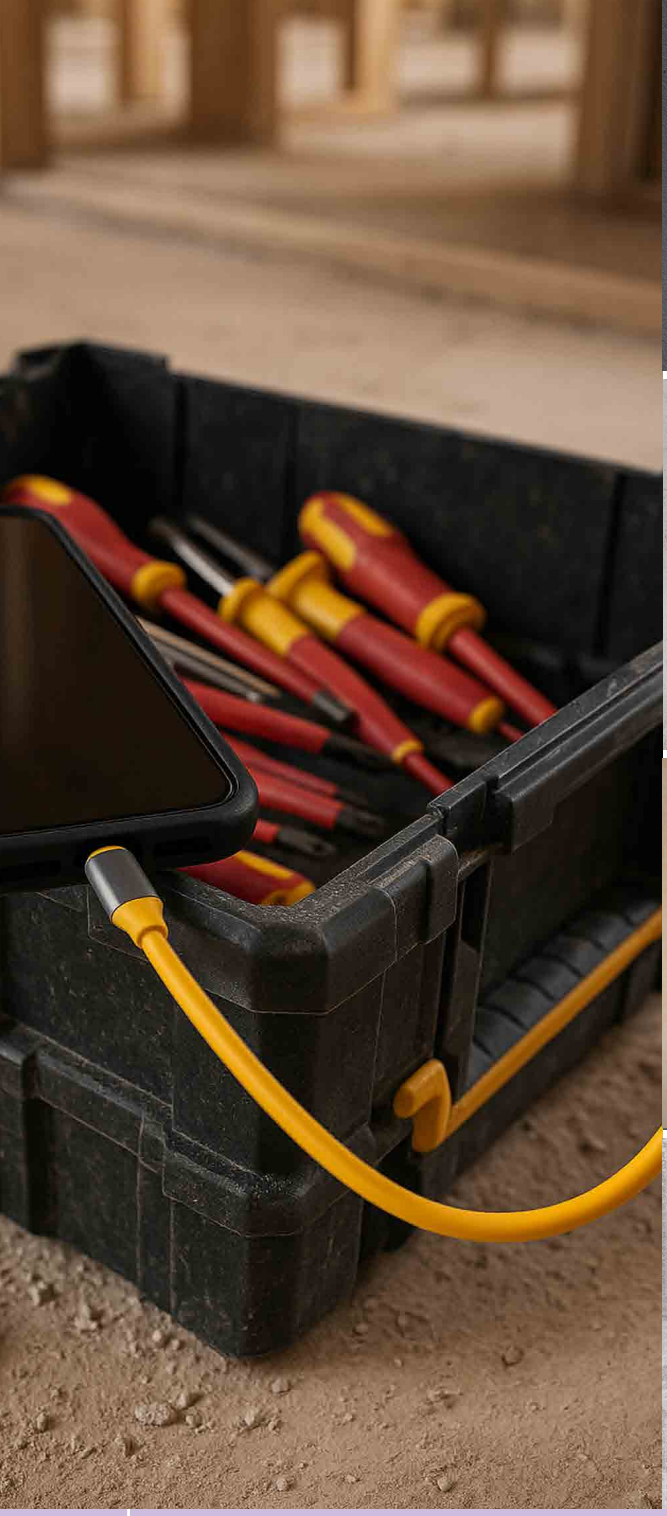




HDMI

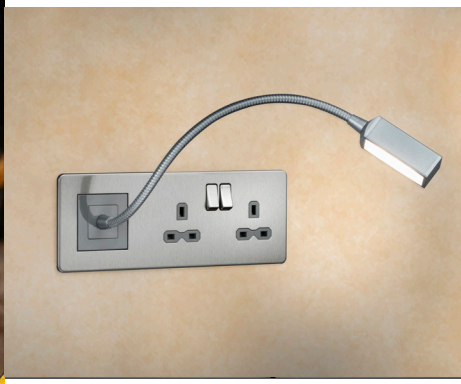



DATACOMMS

A comprehensive range of datacomms accessories. The expansive selection of black, white, and grey inserts can be used alongside the entire offering of Knightsbridge switches and sockets

Telecom Modules	160
TV Modules	160 - 162
HDMI Modules | USB Charger Modules	162
Power Outlet Modules | Switch Modules	163
Touchless Switch Modules | Modular PIR Sensor	164
Modular Reading Lights | Cable Management Faceplates	165
Network Cables | Network Patch Panels | Network Accessories	166
USB Cables | HDMI Cables	167

Use in conjunction with any euro modular faceplate to create cable management faceplates to suit your install. To indicate preferred finish, replace xx on the code with **GY** for grey, **W** for white or leave blank for black

BLANKING MODULES

- 12.5mm x 50mm modules
- Supplied in packs of 10

Code	Model
NETQxx	12.5x50mm
NETHxx	25x50mm



TELEPHONE OUTLET MODULES

- 25mm x 50mm modules
- IDC termination

Code	Model
NETBTMxx	Master
NETBTSxx	Extension
NETRJ11xx	RJ11



NETWORK OUTLET MODULES

- 25mm x 50mm modules
- IDC termination

Code	Model
NETCAT5xx	UTP CATe RJ45 100 MHz
NETCAT6xx	UTP CAT6 RJ45 250 MHz
NETC6Axx	UTP CAT6A RJ45 500 MHz



TV OUTLET MODULES

- 25mm x 50mm modules
- Coax socket

Code	Model
NETTVxx	Non-Isolated



METAL DECORATIVE MULTIMEDIA PLATES
PAGES 128 - 129



TV OUTLET MODULES

- 25mm x 50mm modules
- Coax socket

Code	Model
NETTVSxx	Screened



SAT TV OUTLET MODULES

- 25mm x 50mm modules
- F-type coupler connection

Code	Finish
NETSATxx	Non-Isolated



SAT TV OUTLET MODULES

- 25mm x 50mm modules
- F-type connection

Code	Finish
NETSATSxx	Screened



DIPLEX OUTLET MODULES

- 50mm x 50mm modules
- Screened

Code	Model
NETDITVxx	TV / FM DAB
NETDISATxx	TV / SAT TV



TRIPLEX OUTLET MODULES

- 50mm x 50mm modules
- Screened

Code	Model
NETTRIxx	TV / FM DAB / SAT TV



SCREENED QUADPLEX TV / FM DAB / SAT1 / SAT2 MODULES

- 50mm x 50mm modules
- Screened

Code	Model
NETQDxx	TV / FM DAB / SAT 1 / SAT 2



HDMI MODULES

- 25mm x 50mm modules
- 100mm tail

Code	Model
NETHDMIxx	Socket-to-socket connection



230V DUAL USB A+C CHARGER MODULES (5V DC 3.1A) MAX. 15.5W

- 25mm x 50mm modules
- Dual USB A+C
- Minimum mounting box depth: 35-47mm depending on wiring conditions

Code	Model
NETUSBCxx	25x50mm



15.5W
5V DC 3.1A
(SHARED)



230V DUAL USB A+C CHARGER MODULES (20V DC 2.25A) MAX. 45W

- 50mm x 50mm modules
- Dual USB A+C outputs
- Charge small laptops and tablets at up to 45W from a single USB-C output
- Fast charge two devices at same time at up to 27W PD and 18W QC
- Supports USB-PD and QC Charging protocols
- Built in overheat and overload protection
- Minimum mounting box depth: 35-47mm depending on wiring conditions

Code	Model
NETUSBPDxx	50x50mm



45W
DUAL
FAST CHARGE
[20V ⎓ 2.25A PD]

CHARGES LAPTOPS

(USB-PD is supported by most Android phones and iPhone15 and above.)



230V POWER OUTLET MODULES

- Unswitched
- 50mm x 50mm modules
- Minimum mounting box depth: 25mm

Code	Model
NET13xx	13A Socket
NET5Axx	5A Round Pin Socket



20AX SWITCH MODULES

- 25mm x 50mm modules
- Minimum mounting box depth: 25mm

Code	Model
NET2xx	1G 2-Way
NET12xx	Intermediate



20AX WIDE ROCKER SWITCH MODULES

- 50mm x 50mm modules
- Minimum mounting box depth: 25mm

Code	Model
NET2Wxx	1G 2-Way
NET12Wxx	Intermediate





TOUCHLESS SWITCH MODULES

- 50x50mm
- Gesture controlled on/off
- Max. load: 500W resistive/200W inductive / 100W LED
- Minimum mounting box depth: 47mm

Code	Model
NETTS1xx	1-way

A neutral is required for the install



HELPS REDUCE THE SPREAD OF GERMS AND BACTERIA



MODULAR PIR SENSORS

- 50x50mm
- 120° field of detection and 5m range
- Max. load: 200W incandescent / 100W LED
- Time pre-set: 3 mins
- Minimum mounting box depth: 47mm

Code	Model
NETPIRxx	Auto
NETPIRSxx	Auto with Override

A neutral is required for the install



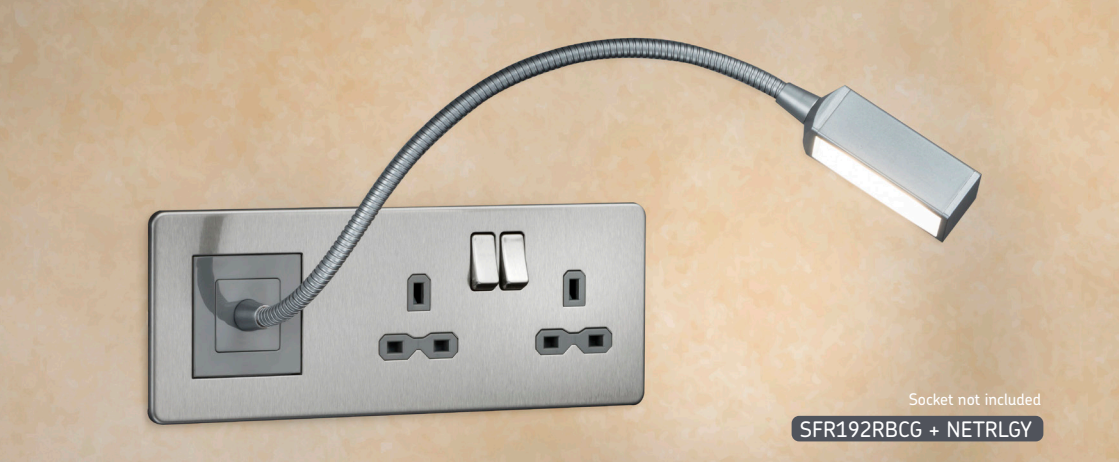

230V TOUCH DIMMING LED READING LIGHT

- 50x50mm
- 3000K
- On/OFF and touch dimming control on head unit
- Minimum mounting box depth: 35mm

Code	Model
NETRLxx	2W Reading light





ASSEMBLED CABLE MANAGEMENT FACEPLATES

Modular faceplate with brush module pre-fitted facilitates a tidy cable entry/exit from wall or panel

Code	Model
NETBRUSH2	86 x 86mm
NETBRUSH4	86 x 146mm



Use in conjunction with any euro modular faceplate to create cable management faceplates to suit your install. To indicate preferred finish, replace xx on the code with **GY** for grey, **W** for white or leave blank for black

CABLE OUTLET MODULES

Code	Model
NETBR1Gxx	25x50mm
NETBR2Gxx	50x50mm
NETBR4Gxx	100x50mm



NB: Not intended for use alongside power sockets / modules in same channel due to potential hazardous voltage that may be present and easily reached

NETWORK PATCH PANELS

- 19" 1U 24-port
- Universal / 110 IDC termination
- Port identification
- Dual 568A/B



Code	Model
NETC524	UTP CAT5e
NETC624	UTP CAT6



NETWORK CABLES

- CCA 24AWG
- RJ45 to RJ45 snagless boots



Code	Model	Finish
NETC61M	1m - UTP CAT6	Black
NETC63M	3m - UTP CAT6	Black
NETC65M	5m - UTP CAT6	Black
NETC510M	10m - UTP CAT5e	Grey

NETWORK ACCESSORIES

- Ideal for connecting patch leads, extending cables, or repairing cable breaks

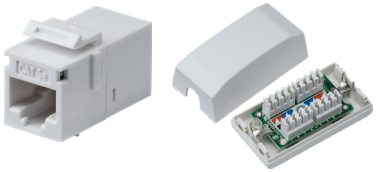

Code	Model
NETRJC5	UTP CAT5e RJ45 Inline Coupler
NETRJC6	UTP CAT6 RJ45 Inline Coupler
NETJ6	UTP CAT5e/CAT6 Junction box





NEW

TWIN PACK OF 2-IN-1 240W USB CHARGER CABLES

- Use as a USB-C to USB-C for the latest devices
- Use with the built-in adaptor head as a USB-A to USB-C for older legacy devices
- Capable of supporting up to 240W of power - these cables future-proof your charging needs
- Robust, metal connector design with additional over-moulded protection to ensure longevity
- Optimized for charging - but these cable will also support data transfer rates of USB2.0 (Approx. 480Mbps)

Code	Model	
AV240WPK	1.5m	NEW



4K HIGH SPEED HDMI CABLES

- HDMI 2.0 (certified) HDMI-A to HDMI-A
- Supports 1080p / 4K / 4K 60Hz / 3D / HDR
- Supports ARC and 18Gbps

Code	Model
AVHD4K2	2m
AVHD4K3	3m
AVHD4K5	5m
AVHD4K10	10m



8K ULTRA HIGH SPEED HDMI CABLE

- HDMI 2.1 (certified) HDMI-A to HDMI-A
- Supports 1080p / 4K / 4k 120Hz / 3D / HDR / 8K 60Hz
- Supports ARC and 48Gbps

Code	Model
AVUHD8K2	2m













GRID WIRING ACCESSORIES

The Grid Wiring Accessories Range has been developed to complement and integrate into the Knightsbridge Screwless, Flat Plate, Raised Edge and Metalclad ranges.

Grid Mounting Frames | Screwless Faceplates	172
Rounded Edge Faceplates | Square Edge Faceplates | Flat Plate Faceplates	173
Switch Modules | Key Switch Modules	174
Dimmer Modules | Miscellaneous Modules | Fan Isolator Modules	175
Rocker Covers	176

IDEAL FOR THE MOST DEMANDING PROJECTS

Grid wiring accessories offer multiple switching options, control, and additional features such as USB charging.
With solutions available across several ranges, our grid offering is versatile and offers a perfect solution for domestic, industrial, and commercial installations

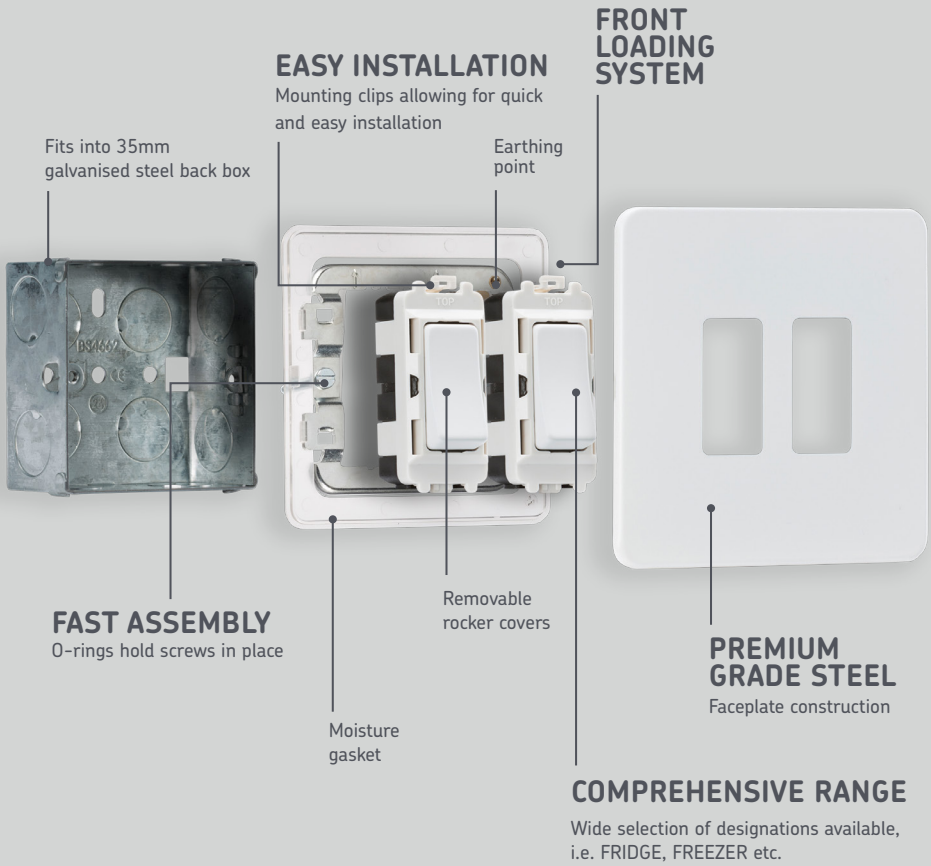

Manufactured to the latest British Safety Standards

Example shown here is for Screwless grid accessories, construction on other ranges may vary



CURVED EDGE

Finish
White
Part M Grey

See page 30 for Curved Edge range



ROUNDED EDGE

Finish
Brushed Chrome
Polished Chrome
Matt Black



SQUARE EDGE

Finish
Brushed Chrome
Polished Chrome
Antique Brass



FLAT PLATE

Finish
Brushed Chrome
Polished Chrome
Brushed Brass



SCREWLESS

Finish
Brushed Chrome
Polished Chrome
Matt White
Matt Black
Anthracite
Smoked Bronze
Black Nickel
Antique Brass



METAL CLAD

Finish
Powder-coated Grey
Textured Sand Black

See page 148 for Metal clad range

GRID MOUNTING FRAMES

- For use with Square Edge, Rounded Edge, Flat Plate and Metal Clad only

Code	Size
GDF001F	1-2G
GDF002F	3-4G



GRID MOUNTING FRAMES

- For use with Screwless Faceplates only

Code	Size
GDS001F	1-2G
GDS002F	3-4G
GDS003F	6-8G
GDS004F	9-12G



SCREWLESS FACEPLATES

- Requires grid mounting frame (sold separately)
- For use with Knightsbridge grid accessories only

Code	Size
GDSF001xx	1G
GDSF002xx	2G
GDSF003xx	3G
GDSF004xx	4G
GDSF006xx	6G
GDSF008xx	8G
GDSF009xx	9G
GDSF012xx	12G

Screwless faceplates: To indicate preferred finish, replace xx on code with BC (brushed chrome), PC (polished chrome), MW (matt white), MB (matt black), AT (anthracite), SB (smoked bronze) or BN (black nickel) AB (antique brass)

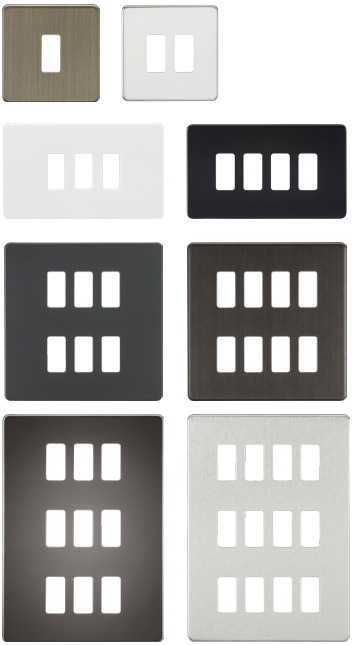

ROUNDED EDGE FACEPLATES

- Requires grid mounting frame (sold separately)
- For use with Knightsbridge grid accessories only

Code	Size	
GDCL1xx	1G	
GDCL2xx	2G	
GDCL3xx	3G	
GDCL4xx	4G	
GDCL6xx	6G	
GDCL8xx	8G	
GDCL9BC	9G	(Brushed Chrome Only)

Rounded edge faceplates: To indicate preferred finish, replace xx on code with BC (brushed chrome), PC (polished chrome) or MB (matt black)

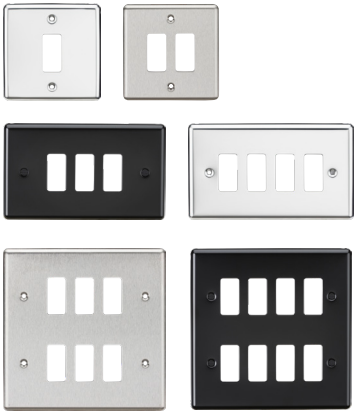

SQUARE EDGE FACEPLATES

- Requires grid mounting frame (sold separately)
- For use with Knightsbridge Grid accessories only

Code	Size	
GDCS1xx	1G	
GDCS2xx	2G	
GDCS3xx	3G	
GDCS4xx	4G	
GDCS6xx	6G	
GDCS8xx	8G	
GDCS9xx	9G	
GDCS12xx	12G	(Brushed Chrome Only)

Square edge faceplates are available in BC (brushed chrome) and AB (antique brass)

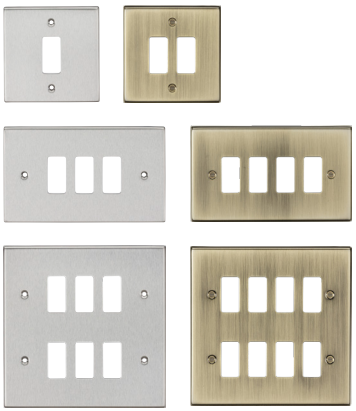

FLAT PLATE FACEPLATES

- Requires grid mounting frame (sold separately)
- For use with Knightsbridge grid accessories only

Code	Size	
GDFP001xx	1G	
GDFP002xx	2G	
GDFP003xx	3G	
GDFP004xx	4G	
GDFP006xx	6G	
GDFP008xx	8G	
GDFP009xx	9G	
GDFP012xx	12G	(Polished Chrome Only)

Flat plate faceplates: To indicate preferred finish, replace xx on code with BC (brushed chrome), PC (polished chrome) or BB (brushed brass)

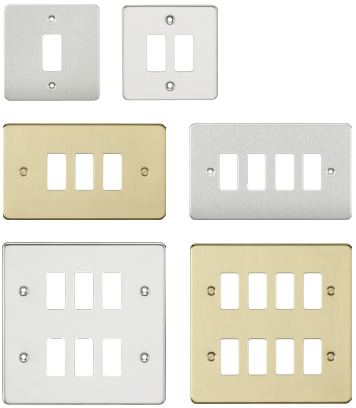



To indicate preferred finish, replace xx on code with SB (smoked bronze), PC (polished chrome), MW (matt white), MB (matt black), BN (black nickel), BC (brushed chrome), BB (brushed brass), AT (anthracite) or AB (antique brass), U (for moulded white)

20AX GRID SWITCH MODULES

- For use with Knightsbridge grid faceplates
- GDM023 is supplied without rocker - select blank rocker cover from page 176 when ordering



Code	Model
GDM001xx	2-Way SP
GDM002xx	DP
GDM003xx	DP + LED Indicator
GDM004xx	2-Way SP (Centre Off)
GDM005xx	Intermediate
GDM006xx	2-Way SP Retractive (Marked "PRESS")
GDM01TOGxx	2-Way SP.
GDM02TOGxx	DP
GDM05TOGxx	Intermediate
GDM023	20AX 2-Way SP Retractive Switch (Centre Off)

20AX GRID KEY SWITCH MODULES

- Supplied with test key



Code	Model
GDM007xx	2-Way SP (Marked "EMG LTG TEST")
GDM008xx	DP (Marked "EMG LTG TEST")
GDM009xx	2-Way SP
GDM010xx	DP
GDKEY	Spare Key

*Not available in Matt White

GRID DIMMERS

- Leading Edge, Trailing Edge, and Intelligent options that can switch between both modes.
- Dummy model for aesthetic matching



Code	Max. Load	Mode
GDM014xx	1-Way 10-200W (10-100W LED)	Trailing Edge, press type
GDM150Ixx	2-Way 10-200W (10-100W LED)	Intelligent Trailing/ Leading Edge
GDM022xx	2-Way 6A Dummy switch	

* Trailing edge dimmer (Press Type) Not available in Antique Brass, Matt Black or Matt White

To indicate preferred finish, replace xx on code with SB (smoked bronze), PC (polished chrome), MW (matt white), MB (matt black), BN (black nickel), BC (brushed chrome), BB (brushed brass), AT (anthracite) or AB (antique brass), U (for moulded white)

MISCELLANEOUS GRID MODULES

- For use with Knightsbridge grid faceplates



Code	Model
GDM011xx	Fuse Holder (13A)
GDM012xx	Flex Outlet (max. 10mm)
GDM013xx	Blank
GDM017	Indicator - Green
GDM019	Indicator - Orange
GDM016xx	Dual USB-A

10A GRID FAN ISOLATOR MODULES

- Triple Pole
- Requires a single grid position only
- Great for reducing wiring costs, consolidate with light switch in a single plate. Key switch version ideal for locations where unauthorised disconnection of fan can lead to damp problems i.e., changing rooms, communal bathrooms, and rental properties



Code	Model
GDM020xx	Fan Isolator Switch Module
GDM021xx	Fan Isolator Key Switch Module (Supplied with Test Key)



To indicate preferred finish, replace xx on code with SB (smoked bronze), PC (polished chrome), MW (matt white), MB (matt black), BN (black nickel), BC (brushed chrome), BB (brushed brass), AT (anthracite) or AB (antique brass), U (for moulded white)

GRID ROCKER COVERS

- Easy to install
- Replace an existing rocker with an engraved version indicating the appliance it refers to

Code	Model
GDBOOSTxx	Fan Boost
GDBOILxx	Boiler
GDCOFFxx	Coffee Machine
GDCOOKxx	Cooker Hood
GDDISHxx	Dishwasher
GDFANxx	Fan
GDFREEZERxx	Freezer
GDFRIDGExx	Fridge
GDFRIDxx	Fridge Freezer
GDHOBxx	Hob
GDMICROxx	Microwave
GDOVENxx	Oven
GDDRYxx	Tumble Dryer
GDWARMxx	Warming Drawer
GDWASHxx	Washing Machine
GDWASTExx	Waste Disposal
GDWINExx	Wine Cooler
GDBLANKxx	Spare Rocker



Knightsbridge

SCREWLESS

SWITCHES AND SOCKETS



ANTHRACITE | ANTIQUE BRASS | BRUSHED CHROME | BLACK NICKEL | MATT BLACK | MATT WHITE | POLISHED BRASS | POLISHED CHROME | SMOKED BRONZE

THE KNIGHTSBRIDGE SCREWLESS RANGE IS AVAILABLE IN NINE DIFFERENT FINISHES











WEATHERPROOF

Outdoor wiring accessories, providing everything you need to safely deliver power to domestic and commercial outdoor spaces

1G | 2G Socket	182
Remove Controlled Sockets | Smart Socket	183
2G Dual USB Sockets | RCD Switched Socket	184
Light Switches | Fused Spur Units	185 - 186
Manual Control Boxes | Remote Controlled Boxes	186
Weatherproof Boxes	187
Weatherproof Connectors | Glands	188 - 189

KNOW YOUR IP RATING

IPxx

First digit
Indicates the level of protection against access to hazardous parts and the ingress of solid objects

1	**>50mm** Protection against any large surface of the body, such as the back of a hand, but no protection against deliberate contact
2	**>12.5mm** Protection against fingers or similar objects
3	**>2.5mm** Protection against tools, thick wires, etc.
4	**>1mm** Protection against most wires, slender screws, large insects etc.
5	**Dust protected** Protection against dust that may harm equipment
6	**Dust tight** No ingress of dust; complete protection against ingress

Second digit
Indicates the level of protection against the harmful ingress of water

1	**Dripping water** Protection against vertical drops when mounted in an upright position onto a turntable and rotated at 1 RPM
2	**Dripping water (tilted)** Protection against water droplets when tilted up to 15° from vertical
3	**Spraying water** Protection against water spray up to an angle of 60 degrees
4	**Splashing water** Protection against splashing water from any direction
5	**Water jets** Protection against low pressure jets of water from any direction
6	**Powerful water jets** Protection against high pressure jets of water from any direction

Please note, IPX7 and IPX8 are tested using different methods from IPX6 and below. Products with IPX7 or IPX8 ratings are not necessarily protected from water jets or splashes

7	**Immersion up to 1m** Protection from immersion in water under defined conditions of pressure and time
8	**Immersion beyond 1m** Protection from immersion in water under defined conditions of pressure and time



IP66

BS 7671:2018+A2:2022



DIMENSIONS*

Single plate: 153mm x 110mm
Double plate: 153mm x 170mm
Projection: 84mm

*Unless otherwise stated



13A OUTDOOR SOCKETS

- Rugged, impact resistant polycarbonate construction
- Double pole switches
- Large-sized locking mechanism for ease of use
- Transparent casing allowing on/off power indicators to be seen at a distance, and offers extra clearance for the more robust fully moulded plug tops
- Lockable lid (padlock not included)
- Multiple 20mm cable access points (sides and rear)
- BS 1363-2/EV certified*

Code	Size	Model
OP7N	1G	DP + Indicator (Twin Earth)

* BS 1363 sockets can be used for EV charging under specific conditions, they are not ideal for regular use. For improved safety, EV-rated sockets should be prioritised in line with the IET Code of Practice, and dedicated EV chargers considered where possible. Charging equipment should always be inspected and maintained. If in doubt, consult a qualified electrician. for more information please see page 153.



IP66

IK06

* EV COMPATIBLE

2 YEAR WARRANTY

13A OUTDOOR SOCKETS

- Rugged, impact resistant polycarbonate construction
- Double pole switches
- Large-sized locking mechanism for ease of use
- Transparent casing allowing on/off power indicators to be seen at a distance, and offers extra clearance for the more robust fully moulded plug tops
- Lockable lid (padlock not included)
- Multiple 20mm cable access points (sides and rear)

Code	Size	Model
OP9N	2G	DP + Indicator (Twin Earth)



IP66

IK06

2 YEAR WARRANTY

13A 2G REMOTE CONTROLLED OUTDOOR SOCKET

Remote control outdoor socket solution, enabling you to control your socket from a convenient key fob style remote control

- Control either socket from key remote fob
- Ideal for controlling outdoor devices like water features or pond lighting
- Remote fob requires 2 x 3V CR2016 Lithium batteries (included)
- Range of up to 30m (dependent on environment)

Code	Model
OP9R	IP66 2G Remote Controlled Switched Socket



IP66

IK06

REMOTE CONTROL

2 YEAR WARRANTY

13A 2G SP SMART WI-FI OUTDOOR SOCKET

- Certified Works with Alexa and Google Assistant
- Controls up to 2 outdoor appliances
- Wi-Fi connectivity IEEE 802.11 b/g/n (2.4GHz only)
- Manually override by using the switch on the socket
- Rugged outdoor enclosure
- Range: 20m-40m (depending on Wi-Fi signal coverage)

Code	Model
OP9KW	2G SP



IP66

IK06

WI-FI

POWER MONITORING KWh

2 YEAR WARRANTY

FOR MORE INFORMATION ON SMART SEE PAGE 438

works with Smart Life

works with alexa

works with Google Home

Amazon, Alexa and all related logos are trademarks of Amazon.com, Inc. or its affiliates.

Google is a trademark of Google LLC.



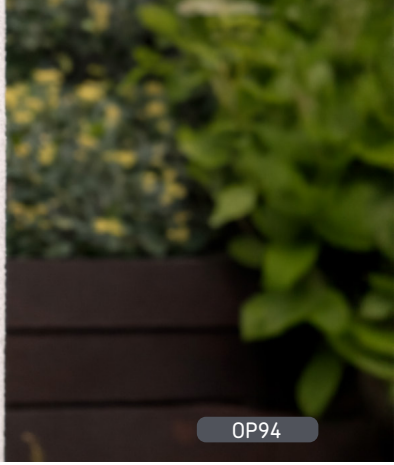

13A 2G SP SWITCHED SOCKET WITH DUAL USB A+C (5V DC 4.0A) MAX. 20W

- Charge portable devices during BBQs
- Single Pole Switch
- Twin Earths
- Dual USB A+C outputs
- Over Voltage CAT III – Suitable for domestic and commercial installations
- Built in overheat and overload protection

Code	Model
OP94	IP66 13A 2G SP Switched Socket with Dual USB A+C (5V DC4.0A shared)



20W
5V DC 4.0A (SHARED)

13A 2G DP RCD SWITCHED SOCKET

Type A RCD for AC residual current and pulsating DC up to 6 mA. Suitable for equipment with electronic components like IT equipment

Passive (latching) type; will automatically reset after a power outage without the need for manual resetting

- Tripping current: 30mA
- Trip time @: 40ms
- Outboard rockers
- Double pole switches
- Twin Earth terminals

Code	Model
OP9RCD	IP66 13A 2G DP RCD Switched Socket



IP66

IK06

30mA
RCD TYPE-A LATCHING

2
YEAR WARRANTY



20AX OUTDOOR LIGHT SWITCHES

- Rugged, impact-resistant polycarbonate construction
- Multiple 20mm cable access points
- Unique circular rocker switch design
- 20AX switches
- Built-in blue LED indicator

Code	Model	
0P2	1G 2-Way with Indicator	
0P3	2G 2-Way with Indicator	
0P21	1G Retractive with Indicator	
0P2DP	1G DP Switch	NEW



IP66

IK06

2 YEAR WARRANTY

16A 1G TIME DELAY SWITCH

- Rugged, impact-resistant polycarbonate construction
- Retractive Switch action
- 16A Resistive, 2A Inductive, Low Voltage 20-200W, 150W LED
- Time Delay Function for 2mins - 180mins - User adjustable (DIP switch)

Code	Model	
0P21T	Time Delay Switch	NEW



IP66

IK06

TIME DELAY

2 YEAR WARRANTY

NEW

13A FUSED SPUR UNITS

- Double pole switch where applicable

Code	Model
OP63N	Switched + Indicator
OP6N	Unswitched + Indicator



IP66

IK06

2 YEAR WARRANTY

RF REMOTE CONTROLLED

Code	Load	Model	Finish
OP663GBK	13A	3G Control Box + Remote	Black
OP665GBK	13A	5G Control Box + Remote	Black
OPREMOTE		Spare Remote Control*	Black

*For use with Knightsbridge remote controlled boxes only



IP66

IK06

REMOTE CONTROL

2 YEAR WARRANTY

OUTDOOR PHOTOCELL SENSOR

- Dusk-to-dawn photocell timer. Ideal for controlling outdoor lighting during the evenings for security and convenience
- Suitable for garden or communal lighting solutions as well as shop window display lighting and advertising systems
- Wall mountable - easy installation

Max Load: 1000W Incandescent / 200W LED

Code	Function	Finish
OS006	Ambient Light Memory Function - 2/4/6/8hr Durations	White
OS006B	Ambient Light Memory Function - 2/4/6/8hr Durations	Black



230V 50Hz

IP55

2 YEAR WARRANTY

WEATHERPROOF BOXES

Ideal for creating bespoke outdoor wiring requirements, outdoor seasonal lighting, and general outdoor power requirements

- 5 channel gasket allows 1 x power in and 4 x power out, ideal for use with a 4G trailing socket
- Wall mountable via rear mounting plate
- Velcro mounting pad included with Velcro tape
- Screwless design, easy to open and close

Code	Model	Dimensions (mm)
JB55BK	Black	H: 334 W: 220 P: 116



IP55

IK06

2 YEAR WARRANTY

OUTDOOR ENCLOSURES

- Rugged, impact-resistant polycarbonate construction
- Multiple 20mm cable access points
- Designed for use up to 230V 50Hz

Code	Model	Dimensions (mm)
JB007BK	Black	H: 86 W: 74 P: 62
JB008BK	Black	H: 86 W: 125 P: 62
JB009BK	Black	H: 111 W: 181 P: 100
JB0010BK	Black	H: 184 W: 274 P: 135



IP66

IK06

2 YEAR WARRANTY

EMPTY OUTDOOR ENCLOSURE

- Rugged, impact-resistant polycarbonate construction
- Multiple 20mm cable access points
- Compatible with 7mm Curved Edge range see pages 16-37

Code	Size	Dimensions (mm)	
OP7E	1G	H: 158.5 W: 110.5 P: 92.1	NEW
OP9E	2G	H: 158.7 W: 170.7 P: 92.7	NEW







IP66

IK06

2 YEAR WARRANTY

NEW



WEATHERPROOF CONNECTORS

- IP68 rated
- For use with H07RNF 3G 0.75mm² - 4.0mm² Cable

IP68

2 YEAR WARRANTY



Code	Rating	Depth	Cable Diameter	Model
JB0011	450V 16A	2bar	5mm - 12mm	Plug & Socket Connector - (3-pin)
JB0012	450V 16A	2bar	5mm - 10mm	Plug and Socket Connector (4-pin) **NEW**
JB002	450V 16A	5bar	5mm - 14mm	Inline Connector - screw terminals
JB0013	450V 24A	5bar	5mm - 14mm	Inline Connector - Lever terminals
JB003	450V 16A	2bar	5mm - 14mm	3-way Connector - screw terminals
JB004	450V 16A	2bar	5mm - 10mm	3-way Connector Box - screw terminals

IP66 CABLE GLAND

For use with outdoor switches, sockets, and enclosures

Code	Size	Qty
JB006	M20 (20mm)	10



IP66

2 YEAR WARRANTY



GEL BOXES

- Pre-filled Gel Boxes equipped with a simple click closure mechanism, these gel boxes ensure a seamless and hassle-free installation, providing a robust and reliable solution for any outdoor wiring project

IP68

2 YEAR WARRANTY



Code	Rating	Depth	Cable Diameter	Model
JB0016	450V 24A	5bar	5mm - 14mm	Inline Gel box with lever connector
JB0014	450V 24A	5bar	5mm - 14mm	3-way Gel Junction box with lever connector
JB0015	450V 24A	5bar	5mm - 14mm	4-way Gel Junction box with lever connector

WEATHERPROOF HUB

- Twist and Lock Connection - 1 in 3 Outputs. Can be wall or post mounted.

IP68

2 YEAR WARRANTY



Code	Rating	Depth	Cable Diameter	Model
JB0018	450V 24A	5bar	5mm - 14mm	Plug & Socket Connections - screw terminals










12:34
USB CHARGER

WIRING BASICS

Your everyday electrical essentials, including pendant sets, extension leads, tools, testing kits, and more

Surface Boxes | Dry Lining Boxes	192
Galvanised Steel Boxes | Extension Boxes | Grid Back Boxes	193
Decorative Pull Cord Switches	194
Decorative Pull Cord Dimmer Switches	195
Contemporary Metal Pendant Sets	196
Vintage Metal Pendant Sets	197
Lamp Holders | Pendant Sets/Batten Holders | VELOX 20A Connector	198
Cord Switches | Flip-Down Phone Holder | Strip Connectors | Electrical Screws	199
Service Connector Blocks | Junction Boxes | Cartridge Fuses	200
Plug Tops | Mains Adaptors | Extension Leads	201
Testing Kits	202
Holesaws	203
Plugs and Sockets | Rotary Isolators	204 - 205
Wireless Door Bells	206 - 207
Extractor Fans	208 - 210

SURFACE-MOUNT BOXES

- Suitable for use with Knightsbridge Screwless, and Flat Plate switches and sockets
- 32mm deep

Code	Size	Finish
1GSBBK	1G	Black
1GSBGY	1G	Grey
1GSBW	1G	White
1GSBBC	1G	Brushed Chrome Effect
1GSBPC	1G	Polished Chrome Effect
2GSBBK	2G	Black
2GSBGY	2G	Grey
2GSBW	2G	White
2GSBBC	2G	Brushed Chrome Effect
2GSBPC	2G	Polished Chrome Effect



PVC SURFACE MOUNT BOXES

- Durable high impact PVC construction
- Trunking knockout entries (top bottom and centre)
- 29mmm internal depth, 32mm overall height

Code	Size	Model	Qty
SN1400P	Single	Internal Depth 29mm	10
SN1500P	Double	Internal Depth 29mm	5



DRY LINING BOXES

- Large flange to prevent slipping into cavity
- Two adjustable lugs
- Cable entry channels top and bottom (except SN8375)
- Cable knockout on rear
- Minimum 7mm plasterboard thickness required

Code	Model	Qty
SN8370	35mm - 1G	10
SN8381	47mm - 1G	10
SN8380	35mm - 2G	10
SN8382	47mm - 2G	10
SN8375	34mm Round	10
SN8380D	35mm Dual	10
SN8335D	35mm 1G + 2G	5

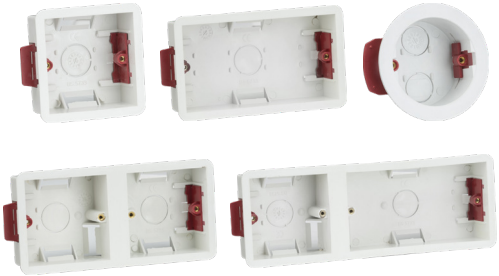

GALVANISED STEEL BOXES

- Galvanized steel construction 1mm thickness (+/- 1%)
- One fixed mounting lug and one adjustable mounting lug (except architrave and dual boxes)
- Cable knockouts on all sides (except architrave and 16mm boxes)

Code	Model	Qty
GSK27	27mm Architrave + Earth Terminal	20
GSK16	16mm 1G + Earth Terminal	20
GSK25	25mm 1G + Earth Terminal	10
GSK35	35mm 1G + Earth Terminal	10
GSK47	47mm 1G + Earth Terminal	10
GSK347D	47mm 1G + 2G + Earth Terminal	5
GSK225	25mm 2G + Earth Terminal	5
GSK235	35mm 2G + Earth Terminal	5
GSK247	47mm 2G + Earth Terminal	5
GSK235D	35mm Dual + Earth Terminal	5
GSK298F	47mm 4 x 2G + Earth Terminals	1 **NEW**
GSK335	35mm Triple + Earth Terminal	5
GSK335D	35mm 1G + 2G + Earth Terminal	5
GSK194F	47mm 2 x 2G + Earth Terminals	1 **NEW**

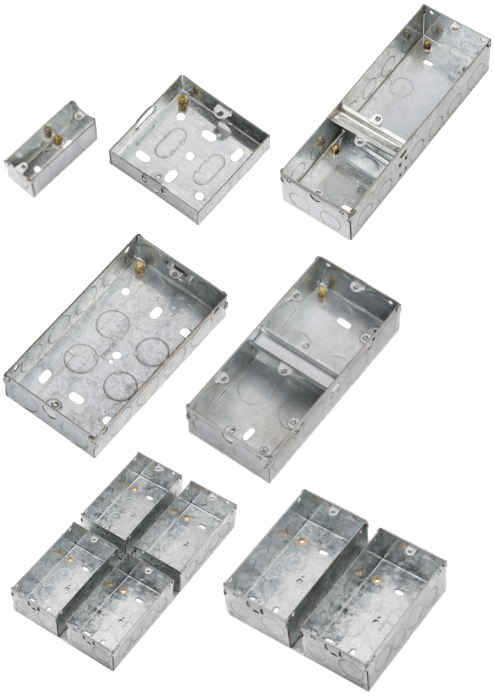

EXTENSION BOXES

- Used to extend standard flush wall boxes that have been sunk in too deep

Code	Model	Qty
GSE25	25mm Single	10
GSE225	25mm Double	5

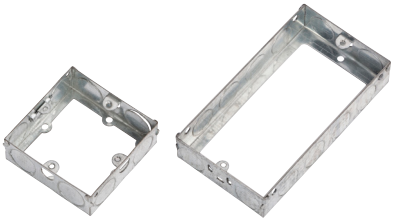

GRID BACK BOXES

- For use with 6, 8, 9 and 12G grid faceplates

Code	Model	Qty
GDSG68G	35mm 6-8G + Earth Terminals	1
GDSG912G	35mm 9-12G + Earth Terminals	1

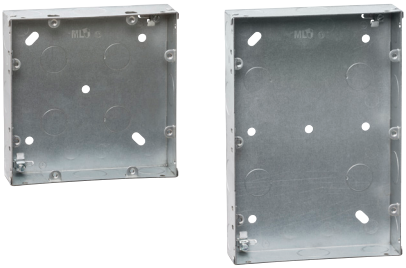



DECORATIVE PULL CORD SWITCHES

- Perfect for utility rooms and bathrooms
- 10AX rated
- 2-Way
- Approx. 1.5m pull cord

Code	Finish
8300AB	Antique Brass
8300AT	Anthracite
8300BC	Brushed Chrome
8300BN	Black Nickel
8300MB	Matt Black
8300MW	Matt White
8300PC	Polished Chrome
8300SB	Smoked Bronze



MATCH THE FINISH

THERE ARE A RANGE OF PRODUCTS IN MATCHING FINISHES TO KEEP INTERIOR DESIGNS CONSISTENT

SHAVER SOCKET SEE PAGE 117 - 118

CEILING LIGHT SEE PAGE 283





DIMMABLE DECORATIVE PULL CORD SWITCHES

- 10-150W Incandescent
- 5-100W LED
- 1-Way
- Pull on/off / pull and hold to dim up/down
- With potentiometer for trimming
- Trailing edge dimmer technology
- Certified to EN 60669-2

Code	Finish
8301AB	Antique Brass
8301AT	Anthracite
8301BC	Brushed Chrome
8301BN	Black Nickel
8301MB	Matt Black
8301MW	Matt White
8301PC	Polished Chrome
8301SB	Smoked Bronze



PULL CORD SWITCHES

- Ideal for bathrooms and utility rooms
- With approx. 1.5m pull cord and matching pull cord cap

Code	Model	Qty	
SN8290	10A 1-Way (White)	5	
SN8300	10A 2-Way (White)	5	
SN8310N	45A DP with Neon (White)	5	
SN8311N	10A Fan Isolator Pull Cord Switch with Neon	5	NEW
PM8300	2-Way Pull Cord Switch with Grey Cord and Bangle	1	
PM8310N	DP Pull Cord Switch with Grey Cord and Bangle	1	
PMCORDR	Replacement PVC Emergency Pull Cord Kit	1	



6" CONTEMPORARY METAL PENDANT SETS

- 3 Plate format
- Metal finish ceiling rose and lampholder
- Braided cord flex
- Contemporary styled lampholder



Code	Size	Model
8270MB	6" T2 E27	Matt Black
8270MW	6" T2 E27	Matt White
8270BC	6" T2 E27	Brushed Chrome
8270PC	6" T2 E27	Polished Chrome
8270BN	6" T2 E27	Black Nickel

Code	Size	Model
8270AB	6" T2 E27	Antique Brass
8270PB	6" T2 E27	Polished Brass
8270AT	6" T2 E27	Anthracite
8270SB	6" T2 E27	Smoked Bronze

1.8M CONTEMPORARY METAL PENDANT SETS

- 3 Plate format
- Metal finish ceiling rose and lampholder
- Braided cord flex
- Contemporary styled lampholder



Code	Size	Model
8270LMB	1.8m T2 E27	Matt Black
8270LMW	1.8m T2 E27	Matt White
8270LBC	1.8m T2 E27	Brushed Chrome
8270LPC	1.8m T2 E27	Polished Chrome
8270LBN	1.8m T2 E27	Black Nickel

Code	Size	Model
8270LAB	1.8m T2 E27	Antique Brass
8270LPB	1.8m T2 E27	Polished Brass
8270LAT	1.8m T2 E27	Anthracite
8270LSB	1.8m T2 E27	Smoked Bronze

NB: lamps not included

6" VINTAGE METAL PENDANT SETS

- 3 Plate format
- Metal finish ceiling rose and lampholder
- Braided cord flex
- Vintage styled lampholder

NEW RANGE OF FILAMENT LAMPS AVAILABLE. SEE PAGE 446





Code	Size	Model
8271MB	6" T2 E27	Matt Black
8271MW	6" T2 E27	Matt White
8271BC	6" T2 E27	Brushed Chrome
8271PC	6" T2 E27	Polished Chrome
8271BN	6" T2 E27	Black Nickel

Code	Size	Model
8271AB	6" T2 E27	Antique Brass
8271PB	6" T2 E27	Polished Brass
8271AT	6" T2 E27	Anthracite
8271SB	6" T2 E27	Smoked Bronze

1.8M VINTAGE METAL PENDANT SETS

- 3 Plate format
- Metal finish ceiling rose and lampholder
- Braided cord flex
- Vintage styled lampholder



Code	Size	Model
8271LMB	1.8m T2 E27	Matt Black
8271LMW	1.8m T2 E27	Matt White
8271LBC	1.8m T2 E27	Brushed Chrome
8271LPC	1.8m T2 E27	Polished Chrome
8271LBN	1.8m T2 E27	Black Nickel

Code	Size	Model
8271LAB	1.8m T2 E27	Antique Brass
8271LPB	1.8m T2 E27	Polished Brass
8271LAT	1.8m T2 E27	Anthracite
8271LSB	1.8m T2 E27	Smoked Bronze

NB: lamps not included







CEILING ROSE AND LAMPHOLDER

- (SN8260P3) 3 pin ceiling rose: live / earth / neutral / loop in
- (SN8260P4) 4 pin ceiling rose: live / earth / neutral / auxiliary (for emergency lighting) / loop in



Code	Model	Qty
SN8260	Ceiling Rose - 3 Plate	10
SN8250	T2 BC Cord Grip Lampholder	20
SN8260P3	230V 10A 3pin Plug in Ceiling Rose	5
SN8260P4	230V 10A 4pin Plug in Ceiling Rose	5

MOULDED PENDANT SETS

- 3 Plate format



Code	Size	Qty
SN8270	6" T2 BC	10
SN8280	9" T2 BC	10

T2 BC BATTEN HOLDERS

- 100W Incandescent / Max. 8W LED



Code	Model	Qty
SN8200	HO - 3 Terminals (BC)	10
SN8210	Straight Short Skirt (BC) - 3 Terminals	10
SN8220	Angled Short Skirt (BC) - 3 Terminals	10
SN8230	HO with Ceiling Rose Base (BC)	10

VELOX 20A LIGHTING CONNECTOR

- Suitable for 1.00mm² to 2.5mm² cables
- Push-fit terminal, maintenance-free



Code	Model
SN3P	VELOX 20A 3-pin lighting connector
SN4P	VELOX 20A 4-pin lighting connector

CORD SWITCHES

- 6A 230V
- Double pole switch
- Suitable for 1.5mm² cable



Code	Model	Qty
ST6AWH	White	10
ST6ABK	Black	10

2G FLIP-DOWN PHONE HOLDER

- Handy flip-down phone holder for use with double switched sockets with USB charging facility
- Two-piece install - no need to remove socket from wall
- Sits behind the existing double switched socket
- Fold down shelf for supporting your device whilst charging - folds up when not in use



Code	Finish
2GPHBK	Black
2GPHW	White

EXTENSION STUD - NICKEL PLATED

- M3.5
- Raised head / slotted
- Countersunk



Code	Model	Qty
CSCREW35EXT	35mm	10

RAISED HEAD ELECTRICAL SCREWS

- M3.5
- Raised head / slotted
- Countersunk



Code	Model	Qty
CSCREW35	35mm	100
CSCREW50	50mm	100
CSCREW75	75mm	100

FLAT HEAD ELECTRICAL SCREWS

- M3.5
- Flat-head - slotted
- Countersunk



Code	Model	Qty
CSCREW50FB	50mm Brass	100
CSCREW50FBK	50mm Black	100
CSCREW50FN	50mm Nickel Plated	100
CSCREW75FN	75mm Nickel	100

NEW

100A 5-WAY SP CONNECTOR BLOCK

- Heavy-duty service connector blocks for use at meter and mains positions
- 100A 240V
- Secure sealable lid
- For max. 35mm² rigid conductor



Code	Model	
SNEBBK	100A 5-way (Black)	NEW
SNEBBL	100A 5-way (Blue)	NEW
SNEBBR	100A 5-way (Brown)	NEW
SNEBGR	100A 5-way (Green)	NEW
SNEBWH	100A 5-way (White)	NEW

SERVICE CONNECTOR BLOCKS

- Heavy-duty service connector blocks for use at meter and mains positions
- 100A 240V
- Black phenolic urea construction
- Secure sealable lid
- For max. 35mm² rigid conductor



Code	Model	Qty
SNEB1	SP 1 x 5-Way	10
SNEB2	DP 2 x 5-Way	10

JUNCTION BOXES

- Heavy-duty construction
- Ideal for mains and low voltage installations



Code	Model	Qty
SN8400	5A - 4 Terminal - White 59mm	20
SN8400B	5A - 4 Terminal - Black 59mm	20
SN8410	20A - 4 Terminal - White 59mm	20
SN8410B	20A - 4 Terminal - Black 59mm	20
SN8420	20A - 4 Terminal - White 79mm	10
SN8420B	20A - 4 Terminal - Black 79mm	10
SN8430	30A - 3 Terminal - White 89mm	10
SN8430B	30A - 3 Terminal - Black 89mm	10
SN8460	20A - 6 Terminal - White 89mm	10
SN8460B	20A - 6 Terminal - Black 89mm	10
SN8470	60A - 3 Terminal - White	5
SN8470B	60A - 3 Terminal - Brown	5

CARTRIDGE FUSES - DOMESTIC USE

- ASTA approved



Code	Model	Qty
SN3AFUSE	3A Fuse	10
SN5AFUSE	5A Fuse	10
SN13AFUSE	13A Fuse	10
SNMIXEDFUSE	Mixed Fuse Pack (3 x 3A, 3 x 5A, 4 x 13A)	10

QUICK FIX PLUG TOPS AND HEAVY DUTY PLUG TOPS - DOMESTIC USE

- BSI Kitemarked
- Quick fix plug top with clamp type cord grip (SN1383Qx)
- Heavy Duty plug top with screw type cord grip (SN1383Rx)



Code	Model	Qty	
SN1383QW	13A Quick Fix Plug Top	20	NEW
SN1383QB	13A Quick Fix Plug Top	20	NEW
SN1383RW	13A Heavy Duty Plug Top	20	NEW
SN1383RB	13A Heavy Duty Plug Top	20	NEW

PLUG TOPS - DOMESTIC USE

- Screw type cord grip
- BSI Kitemarked



Code	Model	Qty
SN1382	3A Fuse - White	20
SN1381	5A Fuse - White	20
SN1383	13A Fuse - White	20
SN1383BK	13A Fuse - Black	20

MAINS ADAPTORS



Code	Rating	Model	Qty
1350	13A	2-Way	10
1375	13A	3-Way (Fused)	10
8910	1A	Shaver Adaptor (1A Fuse)	20

EXTENSION LEADS

- With power indicator
- Low profile design

* Cable length is approximate



Code	Rating	Model
20042M	13A	4G 2m*
20043M	13A	4G 3m*

SURGE PROTECTED EXTENSION LEADS

- With surge and power indicators



Code	Rating	Model
2004S2M	13A	4G 2m*
8GTOWER	13A	8G 2m*
12GTOWER	13A	12G 2m*

* Cable length is approximate



CAT III 80-1000V AC NON-CONTACT VOLTAGE TESTER

- Light and sound indication
- On / off control
- Power supply: 2 x 1.5V AAA batteries (not included)

Code	Model
TE4B	Voltage Tester



SOCKET TESTER

- Tests for common wiring errors on BS 1363-2 13A sockets
- Simple to use and easy to diagnose faults

Code	Model
TE3	Socket Tester



IP64 2-POLE VOLTAGE TESTERS

- CAT III (690V) / CAT IV (600V)
- Self-proving
- Built-in torch function

Code	Model
TE1	LED + LCD Display



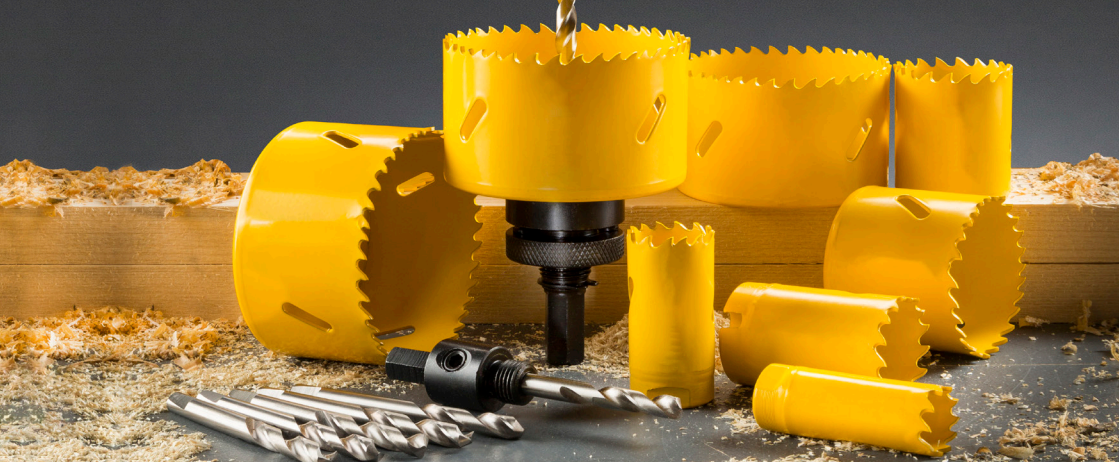

HOLESAWS

- 4/6 TPI Bi-metal variable teeth
- Suitable for cutting steel, stainless steel, die-cast metals, hardwood floors, plywood, and plastics

Code	Model
HS20MM	20mm
HS25MM	25mm
HS32MM	32mm
HS38MM	38mm
HS51MM	51mm
HS60MM	60mm
HS65MM	65mm

Code	Model
HS70MM	70mm
HS72MM	72mm
HS75MM	75mm
HS80MM	80mm
HS85MM	85mm
HS90MM	90mm

A2 AND A4 ARBOR

- A2 size Arbor with 11mm hex arbor shank and 6.3mm high speed pilot drill bit included
- A4 size Arbor with 9.5mm hex arbor shank and 6.3mm high speed pilot drill bit included



Code	Model
HSARBORL	A2
HSARBORS	A4

PILOT DRILL BITS

- 6.35mm x 75mm



Code	Model
HSPILOTDB5	Pack of 5

110V PLUGS AND SOCKETS

- Earth position - 4h
- Pin configuration - 2P+E
- Terminal capacity - max. 4.0mm² per terminal

110V IP44

1 YEAR WARRANTY



Code	Model	Description
IN001	16A	Plug
IN002	16A	Connector
IN003	16A	Surface Mount Socket*

Code	Model	Description
IN004	16A	Panel Mount Socket
IN005	16A	3-Way Splitter

240V PLUGS AND SOCKETS

- Earth position - 6h
- Pin configuration - 2P+E
- Terminal capacity - max. 4.0mm² per terminal

240V IP44

1 YEAR WARRANTY



Code	Model	Description
IN006	16A	Plug
IN0011	32A	Plug
IN007	16A	Connector
IN0023	32A	Connector
IN008	16A	Surface Mount Socket*
IN0012	32A	Surface Mount Socket*

Code	Model	Description
IN009	16A	Panel Mount Socket
IN0013	32A	Panel Mount Socket
IN0021	16A	Surface Mount Inlet*
IN0022	32A	Surface Mount Inlet*
IN0010	16A	3-Way Splitter

*Includes PG21 to M20 adapter

415V PLUGS AND SOCKETS

- Earth position - 6h
- Pin configuration - 3P+N+E
- Terminal capacity - max. 4.0mm² per terminal

415V IP44

1 YEAR WARRANTY



Code	Model	Description
IN0014	16A	Plug
IN0016	32A	Plug
IN0015	16A	Connector
IN0019	16A	Surface Mount Socket*

Code	Model	Description
IN0020	32A	Surface Mount Socket*
IN0017	16A	Panel Mount Socket
IN0018	32A	Panel Mount Socket

*Includes PG21 to M20 adapter

ROTARY ISOLATORS

- 230-415V
- Insulated 4P AC
- Modern rotary switch operation
- M20/M25 cable entries
- Interlocking lid ensures removal in OFF position only
- Handle can be padlocked for safety (padlock not included)

415V IP65

1 YEAR WARRANTY



Code	Model
IN0025	20A
IN0026	32A
IN0027	63A

WIRELESS DOOR CHIME

- 58 ringtones to choose from
- Volume control - up to 110dB
- Eye-catching visual alert
- Hassle-free installation – no wiring necessary
- Learning code prevents interference from other wireless transmitters
- Additional plug-in receivers or bell pushes can be added, if desired
- Working frequency: 433MHz
- Working temperature: -20 - 50° C

WIRELESS BATTERY POWERED DOOR CHIME



RECEIVER

- IP44 rated
- Battery powered requires 3 x AAA batteries (not included)
- Wall mountable or free standing
- Power consumption: less than 0.3W
- Range of approx. 150-200m (depending on environment)

BELL PUSH

- IP55 rated
- Includes fixing for mounting
- Battery powered requires 1 x 12V 23A battery (included)
- Power consumption: less than 10mW
- Range of approx. 150-200m (depending on environment)

Code	Model	Finish
DC010	Wireless Battery Powered Door Chime	White

WIRELESS PLUG-IN DOOR CHIMES



RECEIVER

- Indoor use only
- 230V
- Power consumption: less than 0.3W
- Range of approx. 150-200m (depending on environment)

BELL PUSH

- IP55 rated
- Door number sleeve
- Can be screw mounted or with double-sided sticker pads
- Battery powered requires 1 x 12V 23A battery (included)
- Power consumption: less than 10mW
- Range of approx. 150-200m (depending on environment)
- Dual bell push and dual receiver systems available

Code	Model	Finish
DC012	Wireless Plug-In Door Chime (1 x Bell Push, 1 x Receiver)	Black
DC013	Wireless Plug-In Door Chime (1 x Bell Push, 1 x Receiver)	White
DC014	Dual Entrance System (2 x Bell Push, 1 x Receiver)	White
DC015	Dual Receiver System (1 x Bell Push, 2 x Receivers)	White





WIRELESS PLUG IN MOTION ACTIVATED CHIME SYSTEM

MOTION SENSOR
- IP20 rated
- 110° detection angle
- 5m detection range
- Requires 2 x AA batteries (not included)
- Range of approx. 75-150m*

RECEIVER
- Indoor use only
- Power consumption less than 10mW
- Mains powered
- Range of approx. 75-150m*

*Dependent on environment



230V 50Hz | IP20 | 2 YEAR WARRANTY

Code	Model	Finish
DC016	Wireless plug in motion activated chime system	White

WIRELESS BELL PUSH

- IP55 rated
- Door number sleeve
- Can be screw mounted or with double-sided sticker pads
- Battery powered requires 1 x 12V 23A battery (not included)
- Power consumption: less than 10mW
- Range of approx. 150-300m (depending on environment)



IP55 | 2 YEAR WARRANTY

Code	Model	Finish
DCBPB	Bell Push	Black
DCBPW	Bell Push	White

WIRELESS PLUG-IN RECEIVER

- Compatible with DC010, DC012, DC013, DC014, DC015
- Indoor use only
- 230V
- Power consumption: less than 0.3W
- Range of approx. 150-200m (depending on environment)



230V 50Hz | IP20 | 2 YEAR WARRANTY

Code	Model	Finish
DCRB	Plug-In Receiver	Black
DCRW	Plug-In Receiver	White

Additional wireless plug-in receiver, suitable for extending your door chime system.



230V LED BACKLIT EXTRACTOR FANS

Very low noise level extractor fan. Designed to be fitted into walls and ceilings. Slim, compact design with attractive facia and built-in LED array surround effect. Easy to wipe clean and duct over short lengths (Max. 2m). Perfect solution for quietly removing damp moist air, odours and airborne pollutants from utility rooms, bathrooms and toilets. Particularly suited for ensuite bathrooms where quiet running late at night is essential. Can be installed in Zone 1

- 100mm /4" size
- Low noise of just 28.5dBA
- Built in overrun timer 2-30mins (preset a 2mins)
- Built in backdraft kit
- Extraction rate: 23l/s or 83m^3/hr
- LED lighting effect during activation

Code	Finish
EX3TWH	Matt White
EX5TMB	Matt Black
EX4TSS	Stainless Steel







230V 50Hz

IP45

LOW NOISE

PART L compliant

PART F compliant

3 YEAR WARRANTY



230V EXTRACTOR FANS

Low noise level extractor fan. Designed to be fitted into walls and ceilings. Easy to wipe clean and duct over short lengths. Perfect solution for quietly removing damp moist air, odours and airborne pollutants from utility rooms, bathrooms and toilets. Particularly suited for ensuite bathrooms where quiet running late at night is essential. Can be installed in Zone 1

- 100mm /4" size
- Low noise of just 28.5dBA
- Built in overrun timer 2-30mins - preset at 2mins (1-30mins preset for 1 min EX1THWH only)
- Built in backdraft kit
- Humidistat function (EX1THWH only)
- Extraction rate: 24l/s or 87m³/hr

Code	Finish
EX1TWH	White
EX1TBK	Black





230V 50Hz | IP45 | LOW NOISE | PART L compliant | PART F compliant | 3 YEAR WARRANTY

230V EXTRACTOR FAN WITH HUMIDISTAT FUNCTION

Low noise level extractor fan. Designed to be fitted into walls and ceilings. Easy to wipe clean and duct over short lengths. Perfect solution for quietly removing damp moist air, odours and airborne pollutants from utility rooms, bathrooms and toilets. Particularly suited for ensuite bathrooms where quiet running late at night is essential

- 100mm / 4-inch size
- Low noise level of just 28.5dBA at 3m
- Adjustable over-run timer 1-30mins (preset for 1 min)
- Humidistat function
- Built in back draft kit
- Extraction rate 24 l/s (87m3/hr)
- SPF: 0.404W/L/s
- Compliant with latest Building Regulations (Part F) & (Part L)

Code	Model	Finish
EX1THWH	Humidistat Function	White



230V 50Hz | IP45 | LOW NOISE | PART L compliant | PART F compliant | HUMIDISTAT | 3 YEAR WARRANTY

230V STANDARD EXTRACTOR FAN

Suitable for kitchens, bathrooms and toilets. Designed to be fitted into walls and ceilings. Slim profile, easy to wipe clean and duct over short lengths. Ideal solution for removing damp moist air, odours and airborne pollutants from kitchens, toilets and bathrooms

- 100mm /4" size
- Nose level of just 35dBA
- Built in overrun timer 2-30mins (preset at 2mins)
- Extraction rate: 20.55l/s 74m³/hr



230V 50Hz | IPX2 | LOW NOISE | PART L compliant | PART F compliant | 3 YEAR WARRANTY

Code	Model	Finish
EX001T	4" Fan with Timer	White

GRAVITY SHUTTERS

- Prevents backdraft and rain penetration when installed in internal/external walls
- Easy to install, and suitable for use with round ducting
- Prevents objects or vermin entering when the ventilation is not in operation





Code	Model	Finish
EX007B	4"	Black
EX007W	4"	White

FIXED GRILLES

- An easy-fix solution for internal/external walls, with integral fly screen to keep insects out
- Suitable for use with round ducting
- Removable front grilles allowing access for maintenance and cleaning of the fly screen





Code	Model	Finish
EX009B	4"	Black
EX009W	4"	White

ALUMINIUM DUCTING KIT

- 3m of expandable aluminium ducting
- Kit includes 2 x Jubilee clips



Code	Model
EX4DUCT	4"

GRID FAN ISOLATOR MODULES AVAILABLE ON PAGE 175





NOT JUST PRODUCTS
WE'RE BUILT TO BACK THE TRADE!

CUSTOMER SERVICE

- QUOTES WITHIN 1 HOUR
- SAME DAY COLLECTION FROM OUR WAREHOUSE
- 5PM CUT OFF NEXT DAY DELIVERY (MON-THU) (3PM ON FRIDAYS)
- DELIVER DIRECT TO YOUR CUSTOMERS WITH K-DIRECT
- 98%* STOCK AVAILABILITY
- DEDICATED AREA MANAGERS FOR PERSONALISED SUPPORT
- EXPERT TECHNICAL SUPPORT FOR PRODUCT SELECTION AND SPECIFICATION
- EFFICIENT RETURNS AND REPLACEMENTS WITH MINIMAL DISRUPTION

ONLINE FEATURES

- LIVE CHAT
- LIVE STOCK AVAILABILITY
- MANAGE AND TRACK ORDERS
- CSV PRODUCT DATA DOWNLOAD
- ADDITIONAL DISCOUNT FOR ORDERING ONLINE
- DOWNLOADABLE DATASHEETS AND INSTALLATION GUIDES
- MOBILE-FRIENDLY PLATFORM FOR ORDERING ON THE GO
- INSTANT ACCESS TO INVOICES AND ACCOUNT DOCUMENTS ONLINE











SENSORS

The Knightsbridge range of sensors offers solutions to a variety of lighting requirements both indoor and outdoor, suitable for commercial and domestic applications

Indoor Sensors	214 - 215
Modular PIR Sensors | Microwave Sensors	216
Outdoor Sensors | Photocell Sensors | Batten Microwave Sensor	217 - 219

SEE PAGES 308-329 FOR OUTDOOR WALL LIGHTS



RECESS MOUNTED INDOOR PIR SENSORS

230V 50Hz | IP20 | 2 YEAR WARRANTY

- Can be wired in parallel

Field of detection: 360°



OS0016



OS0019

Code	Range*	Function	Max. Load	Cut-out
OS0016	2-20m	Adjustable Lux / Adjustable Time (10s - 10mins)	2000W Incandescent / 1000W LED	80mm
OS0019	8m	Adjustable Lux / Adjustable Time (30s - 30mins)	2000W Incandescent / 200W LED	38mm

2-IN-1 RECESS OR SURFACE MOUNT PIR SENSOR

230V 50Hz | IP20 | 2 YEAR WARRANTY

- Pre-fitted with ceiling tabs for recess mounting (Cut out: 73mm)
- Simple remove tabs for surface mounting (Projection: 36mm)

Field of detection: 360° / 180° if mounted on wall

RECESS MOUNTED

SURFACE MOUNTED







Code	Model	Range	Function	Max. Load	Type	Finish
OS0025W	PIR	8m	Adjustable lux / Adjustable Time Delay 10sec-7mins	2000W Incandescent / 1000W LED	Dial Settings	White
OS0025B	PIR	8m	Adjustable lux / Adjustable Time Delay 10sec-7mins	2000W Incandescent / 1000W LED	Dial Settings	Black

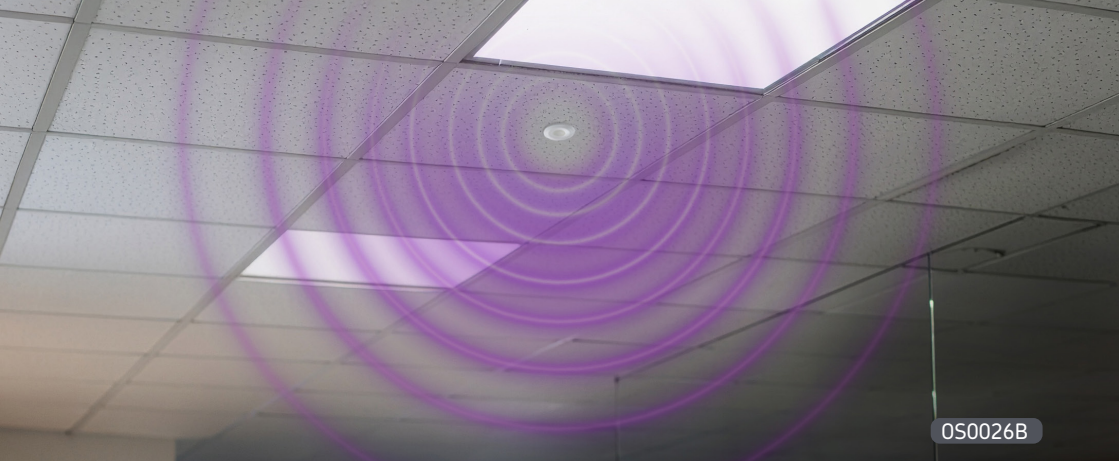

2-IN-1 RECESS OR SURFACE MOUNT MMWAVE OCCUPANCY SENSOR

230V 50Hz

IP20

mmWAVE DETECTION

2 YEAR WARRANTY

Utilising mmWave (millimeter wave radar) technology gives increased resolution due to shorter wavelength, this allows detection of major motion: like someone walking, minor motion: like someone typing at a desk or very fine motion: like breathing

- Pre-fitted with ceiling tabs for recess mounting (Cut out: 73mm)
- Simply remove tabs for surface mounting (Projection: 36mm)

Field of detection: 360° / 180° if mounted on wall

RECESS MOUNTED

SURFACE MOUNTED





Code	Model	Range	Function	Max. Load	Type	Finish
OS0026W	mmWave	6m	Adjustable Detection Range/ Adjustable lux / Adjustable Time Delay 10sec,1, 5, 15mins	2000W Incandescent / 1000W LED	Dip Switches	White
OS0026B	mmWave	6m	Adjustable Detection Range/ Adjustable lux / Adjustable Time Delay 10sec,1, 5, 15mins	2000W Incandescent / 1000W LED	Dip Switches	Black

MODULAR PIR SENSORS

- Operation: passive infrared
- Time pre-set: 3mins.
- NETPIRSxx with override allows Auto or ON control
- Suitable for 47mm back box
- Lux sensitive and time operation fixed
- Live and Neutral wiring required

Field of detection: 120°



NETPIRGY



NETPIRSBK

230V 50Hz

IP20

2 YEAR WARRANTY

Finishes: to indicate desired finish, please replace 'xx' with suffix WH (white), GY (grey), or BK (black) – e.g. NETPIRBK

NETPIRSWH SHOWN WITH NET2GWH MODULAR FRAME.

FOR OTHER MODULAR FRAME OPTIONS, SEE PAGE 14





NETPIRWH

Code	Range	Function	Max. Load
NETPIRxx	5m	PIR Sensor Module 50x50mm	200W Incandescent / 100W LED
NETPIRSxx	5m	PIR Sensor Module with switch 50x50mm	200W Incandescent / 100W LED

RECESS MOUNTED INDOOR MICROWAVE SENSOR

- Operational modes: auto / short pulse / test / manual override
- 62mm cut-out required

230V 50Hz

IP20

2 YEAR WARRANTY



Code	Model	Range	Function	Max. Load	Type
OSHFREC	5.8GHz	1-3m	Adjustable Lux / Adjustable Time (30s - 30mins)	1000W Incandescent 100W LED	Recess Mount HF

MICROWAVE SENSORS

- These products should be installed into an IP rated enclosure or luminaire



230V 50Hz

IP20

2 YEAR WARRANTY

Code	Model	Range	Function	Max. Load	Type
OS008	5.8GHz	2-8m	Adjustable Lux / Adjustable Time (8s - 12mins)	250W Incandescent 250W LED	DIP Switch Setting

OUTDOOR PIR SENSORS

- Completely adjustable head unit for optimum positioning
- Easy to install – wire to the rear mounting plate then simply click the PIR unit into the mounting plate
- Versatile mounting options including wall, ceiling, or corner mounting
- Includes shrouding kit for shielding parts of the PIR to prevent accidental activation
- Automatic operation or manual override function

Field of detection: 200°



230V 50Hz | IP55 | 2 YEAR WARRANTY

CORNER MOUNTABLE



Code	Range*	Function	Max. Load	Colour
OS001	12m	Override Function / Adjustable Lux Adjustable Time (3s - 30mins)	2000W Incandescent / 225W LED	White
OS001B	12m	Override Function / Adjustable Lux Adjustable Time (3s - 30mins)	2000W Incandescent / 225W LED	Black

OUTDOOR PIR SENSORS

- Adjustable head unit (up/down)
- Wall or ceiling mountable

Field of detection: 180°





230V 50Hz | IP44 | 2 YEAR WARRANTY

Code	Range	Function	Max. Load	Colour
OS004	12m*	Adjustable Lux / Adjustable Time (10s - 8mins)	1200W Incandescent / 300W LED	White
OS004B	12m*	Adjustable Lux / Adjustable Time (10s - 8mins)	1200W Incandescent / 300W LED	Black

OUTDOOR PIR SENSORS (COMPACT)

- Adjustable head unit
- Wall or ceiling mountable

Field of detection: 180°





230V 50Hz | IP44 | 2 YEAR WARRANTY

Code	Range	Function	Max. Load	Colour
OS0014	12m*	Adjustable Lux / Adjustable Time (10s - 15mins)	2000W Incandescent 1000W LED	White
OS0014B	12m*	Adjustable Lux / Adjustable Time (10s - 15mins)	2000W Incandescent 1000W LED	Black

* When mounted at 2.4 metres high



OUTDOOR PHOTOCELL SENSOR

- Dusk-to-dawn photocell timer. Ideal for controlling outdoor lighting during the evenings for security and convenience
- Suitable for shop window display lighting or advertising systems
- Wall mountable - easy installation



230V 50Hz | IP55

2 YEAR WARRANTY

Code	Function	Max. Load	Colour
OS006	Ambient Light Memory Function - 2/4/6/8hr Durations	1000W Incandescent / 200W LED	White
OS006B	Ambient Light Memory Function - 2/4/6/8hr Durations	1000W Incandescent / 200W LED	Black

PHOTOCELL SENSORS



230V 50Hz

2 YEAR WARRANTY

Code	Function	IP Rating	Max. Load	Colour
OSPCKIT	10A Photocell Control Sensor	IP66	1000W Incandescent / 300W LED	Black
OSPCR	5A Photocell Switch	IP65	500W Incandescent / 850VA Inductive /300W LED	Black
OS022	1-10V Daylight Sensor	IP20	50mA	White



NEW

20MM CONDUIT PIR SENSOR & SENSOR PROGRAMMING REMOTE

- Internal and external use
- Hold-on Time: 5 sec to 30 min
- Ambient Light Threshold (lux): 5 to 150lux / Disable
- 120° detection angle

SENSOR PROGRAMMING REMOTE

- Compatible with OS021PIR and HELIX Corridor Non-Corrosives
- Features include; on/off, hold time, sensitivity, daylight threshold and test functionality.





230V 50Hz | IP65

2 YEAR WARRANTY

(OSPIRRE ONLY)

230V 50Hz | 1 YEAR WARRANTY

Code	Function	Range*	Colour	Max. Load	
OS021PIR	Conduit PIR Sensor	4-6m	White	200W LED	NEW
OSPIRRE	Sensor programming remote	-	White	-	NEW

BATTEN MICROWAVE SENSOR

- IP65 pre-wired microwave sensor
- Ideal for battens or non-corrosives with 20mm conduit entry
- Adjustable lux, time, and sensitivity



230V 50Hz | IP65

3 YEAR WARRANTY

Code	Function	Range*	Max. Load	Colour
OS021	Adjustable Lux / Adjustable Time (5s - 30mins)	4-6m	400W LED	White

COMPATIBLE WITH BOTH OUR COMMERCIAL BATTENS (PAGE 410) AND NON-CORROSIVE BATTENS (PAGE 417)



LIGHTING











CONTENTS

DOMESTIC INTERIOR

Downlights	222 - 249
Ceiling & Wall Lights	250 - 273
Bathroom	274 - 285
Under Cabinet	286 - 293
LED Flex	294 - 307

OUTDOOR LIGHTING

Wall Lights	308 - 329
Bollard Lighting	330 - 333
Spike Lights	334 - 339
Groundlights & Deck Lighting	340 - 349
Floodlights	350 - 359

COMMERCIAL LIGHTING

Bulkheads & Wall Packs	360 - 379
Commercial Downlights	380 - 393
Recessed, Surface & Suspension Lighting	394 - 403
Battens	404 - 412
Non-Corrosive	412 - 423
High & Low Bays	422 - 425
Emergency Lighting	426 - 439
Lamps & Lighting Accessories	440 - 451

SMART HOME 452 - 459

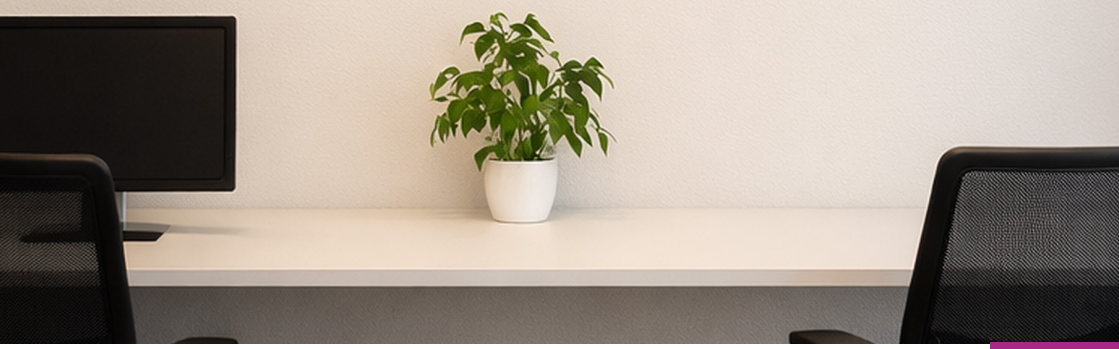










RECEPTION

DOMESTIC INTERIOR

DOWNLIGHTS

Downlights, ideal for domestic spaces, such as living rooms, kitchens and bathrooms. This diverse range includes Smart and Fire Rated integrated LED options

Recessed Downlights	224
Hole Converter Kits | Fire Hood | LED Emergency Pack	225
Architectural Recessed & Surface Downlights	226 - 234
SpektroLED®EVO Integrated LED Fire-Rated Downlights	236 - 241
CYROLED® Fixed and Tilt Fire-Rated Downlights	242 - 243
RENULED® Fixed and Tilt Fire-Rated Downlights	244 - 245
GU10 Fire-Rated Downlights	246 - 247
FIRENOVA Fixed and Tilt Fire-Rated Downlights	248 - 249

FIXED/TILT TWIST & LOCK DOWNLIGHTS

Construction: Die-cast aluminium
Tilt angle: 25° (Tilt version only)
• Complete with MR16 and GU10 lamp holders and bridge









Code	Function	Finish	Cut-out (mm)	Dimensions (mm)	Recessed Depth (mm)	Minimum Void (mm)
RD1B	Fixed	Brass	Ø: 70	Ø: 79	90	140
RD1C	Fixed	Chrome	Ø: 70	Ø: 79	90	140
RD1CBR	Fixed	Brushed Chrome	Ø: 70	Ø: 79	90	140
RD1W	Fixed	White	Ø: 70	Ø: 79	90	140
RD2B	Tilt	Brass	Ø: 80	Ø: 94	98	150
RD2C	Tilt	Chrome	Ø: 80	Ø: 94	98	150
RD2CBR	Tilt	Brushed Chrome	Ø: 80	Ø: 94	98	150
RD2W	Tilt	White	Ø: 80	Ø: 94	98	150

BATHROOM DOWNLIGHTS

Construction: Die-cast aluminium
Driver: Not required
Lamp type: GU10







Code	Function	Finish	Cut-out (mm)	Dimensions (mm)	Recessed Depth (mm)	Minimum Void (mm)
RDSHC	Fixed	Chrome	Ø: 64	Ø: 84	90	140
RDSHCBR	Fixed	Brushed Chrome	Ø: 64	Ø: 84	90	140
RDSHW	Fixed	White	Ø: 64	Ø: 84	90	140

HOLE CONVERTER KITS

- Complete with MR16 and GU10 lamp holders and bridge



230V 50Hz | 12V | IP20 | LAMP DEPENDENT | LAMP NOT INCLUDED | 1 YEAR WARRANTY

Code	Finish	Cut-out (mm)	Dimensions (mm)
HCBC	Brushed Chrome	Ø: 78 - 120	Ø: 140
HCC	Chrome	Ø: 78 - 120	Ø: 140
HCW	White	Ø: 78 - 120	Ø: 140

FIRE HOOD

- Made with breathable intumescent material
- Allows heat from the lamp to be dissipated preventing the terminal block and downlight from overheating
- The fire hood is flexible and light and can be used in plasterboard, concrete, or suspended ceilings
- 60 minute rated



Code	Finish	Max cut-out	Dimensions (mm)
FR150	White	Up to 80mm	H: 150 Ø: 150

NEW

GU10 LED EMERGENCY KIT

- Suitable with GU10 lamp up to maximum of 7W*
- Contains inverter and battery pack within a protective casing
- Pre-wired with easy-fix connectors and LED charge indicator
- Maintained and non-maintained use
- 3-hour emergency duration

*Please check compatibility before installation



230V 50Hz | IP20 | LAMP NOT INCLUDED | 3 YEAR WARRANTY

Code	Finish	Cut-out (mm)
EMGUKIT3	White	55

**HOLESAWS AVAILABLE.
SEE PAGE 203**



ARCHITECTURAL

RECESSED AND SURFACE LIGHTING



REPLACE TRADITIONAL GU10 LAMPS WITH **A STATE OF THE ART MODERN SOLUTION**



LUMINA RETROFIT LED MODULE WITH TRI-COLOUR AND DUAL WATTAGE

- Selectable colour temperature, 3000K, 4000K, 5500K
- Selectable wattage 6/8W and 10/12W
- Plug and play driver allowing ease of installation, with loop-in-loop-out capabilities
- CRI>90
- Dimmable in trailing-edge mode only
- Compatible Emergency Kit available (EMKIT2LSM)

Construction: Aluminium
Driver: Included
Lamp type: LED

230V 50Hz | IP20 | TRI CCT | 5 YEAR WARRANTY





COMPATIBLE WITH EMKIT2LSM

Code	Wattage	CCT	Lumens	Dimensions (mm)
LUM40	6/8W	3000/4000/5500K	520/575/570, 700/780/780lm	Ø: 50 H:40
LUM70	10/12W	3000/4000/5500K	800/890/890, 1000/1055/1025lm	Ø: 50 H:70



ODINA SINGLE FIXED ROUND DOWNLIGHT

- Sleek, curved edge design
- Die-cast aluminium construction
- Lamp holder with cable connector included

Construction: Die-cast aluminium
Lamp Type: GU10 LED 10W Max.





230V 50Hz | IP20 | LAMP DEPENDENT | LAMP NOT INCLUDED | 5 YEAR WARRANTY

Code	Model	Finish	Cut-out (mm)	Dimensions (mm)	Recessed Depth (mm)	Min. Void (mm)
ODA1FRB	Round	Black	Ø: 72	Ø: 82	18	70
ODA1FRW	Round	White	Ø: 72	Ø: 82	18	70
ODA1FSB	Square	Black	Ø: 72	L: 82 W: 82	18	70
ODA1FSW	Square	White	Ø: 72	L: 82 W: 82	18	70



ODINA SINGLE TILT ROUND DOWNLIGHT

- Sleek, curved edge design
- Die-cast aluminium construction
- Lamp holder with cable connector included
- Tilt - 25°

Construction: Die-cast aluminium
Lamp Type: GU10 LED 10W Max.





230V 50Hz | IP20 | LAMP DEPENDENT | LAMP NOT INCLUDED | 5 YEAR WARRANTY

Code	Model	Finish	Cut-out (mm)	Dimensions (mm)	Recessed Depth (mm)	Min. Void (mm)
ODA1TRB	Round	Black	Ø: 72	Ø: 82	18	70
ODA1TRW	Round	White	Ø: 72	Ø: 82	18	70
ODA1TSB	Square	Black	Ø: 72	L: 82 W: 82	18	70
ODA1TSW	Square	White	Ø: 72	L: 82 W: 82	18	70

DIPA SINGLE FIXED ROUND ANTI-GLARE DOWNLIGHT

- Unique anti-glare design
- Dropdown lamp holder allows for rapid lamp installation and maintenance
- Tool-free cable termination for rapid second fix

Construction: Die-cast aluminium
Lamp Type: GU10 LED 10W Max.




Code	Model	Finish	Cut-out (mm)	Dimensions (mm)	Recessed Depth (mm)	Min. Void (mm)
DIA1FRB	Round	Black	Ø: 68	Ø: 78	39	130
DIA1FRW	Round	White	Ø: 68	Ø: 78	39	130
DIA1FSB	Square	Black	L: 68 W: 68	L: 78 W: 78	39	130
DIA1FSW	Square	White	L: 68 W: 68	L: 78 W: 78	39	130

DIPA SINGLE TILT ROUND ANTI-GLARE DOWNLIGHT

- Unique anti-glare design
- Dropdown lamp holder allows for rapid lamp installation and maintenance
- Tool-free cable termination for rapid second fix
- Tilt - 25°

Construction: Die-cast aluminium
Lamp Type: GU10 LED 10W Max.




Code	Model	Finish	Cut-out (mm)	Dimensions (mm)	Recessed Depth (mm)	Min. Void (mm)
DIB1TRB	Round	Black	Ø: 82	Ø: 93	39	90
DIB1TRW	Round	White	Ø: 82	Ø: 93	39	90
DIB1TSB	Square	Black	L: 80 W: 80	L: 93 W: 93	39	90
DIB1TSW	Square	White	L: 80 W: 80	L: 93 W: 93	39	90

DIPA TWIN TILT ROUND ANTI-GLARE DOWNLIGHT

- Unique anti-glare design
- Dropdown lamp holder allows for rapid lamp installation and maintenance
- Tool-free cable termination for rapid second fix
- Tilt - 25°

Construction: Die-cast aluminium
Lamp Type: GU10 LED 10W Max.




Code	Model	Finish	Cut-out (mm)	Dimensions (mm)	Recessed Depth (mm)	Min. Void (mm)
DIC2TRB	Round	Black	L: 173 W: 82	L: 185 W: 93	39	130
DIC2TRW	Round	White	L: 173 W: 82	L: 185 W: 93	39	130
DIC2TSB	Square	Black	L: 173 W: 82	L: 185 W: 93	39	130
DIC2TSW	Square	White	L: 173 W: 82	L: 185 W: 93	39	130



AMBAR SINGLE TILT SQUARE DOWNLIGHT

- Fully adjustable heads allow for directional aiming
- Dropdown lamp holder allows for rapid lamp installation and maintenance
- Tool-free cable termination for rapid second fix
- Tilt - 25°

Construction: Aluminium
Lamp Type: GU10 LED 10W Max.

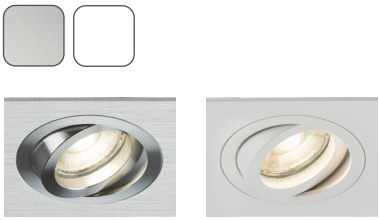

Code	Model	Finish	Cut-out (mm)	Dimensions (mm)	Recessed Depth (mm)	Min. Void (mm)
AMA1TSBC	Single	Brushed Chrome	82	L: 92 W: 92 P: 3	22	70
AMA1TSW	Single	White	82	L: 92 W: 92 P: 3	22	70

AMBAR TWIN TILT SQUARE DOWNLIGHT

- Fully adjustable heads allow for directional aiming
- Dropdown lamp holder allows for rapid lamp installation and maintenance
- Tool-free cable termination for rapid second fix
- Tilt - 25°

Construction: Aluminium
Lamp Type: GU10 LED 10W Max.



Code	Model	Finish	Cut-out (mm)	Dimensions (mm)	Recessed Depth (mm)	Min. Void (mm)
AMA2TSBC	Twin	Brushed Chrome	L: 165 W: 80	L: 175 W: 92 P: 3	22	70
AMA2TSW	Twin	White	L: 165 W: 80	L: 175 W: 92 P: 3	22	70



AMBAR TRI TILT SQUARE DOWNLIGHT

- Fully adjustable heads allow for directional aiming
- Dropdown lamp holder allows for rapid lamp installation and maintenance
- Tool-free cable termination for rapid second fix
- Tilt - 25°

Construction: Aluminium
Lamp Type: GU10 LED 10W Max.





Code	Model	Finish	Cut-out (mm)	Dimensions (mm)	Recessed Depth (mm)	Min. Void (mm)
AMA3TSBC	Triple	Brushed Chrome	L: 245 W: 80	L: 260 W: 92 P: 3	22	70
AMA3TSW	Triple	White	L: 245 W: 80	L: 260 W: 92 P: 3	22	70

AMBAR QUAD TILT SQUARE DOWNLIGHT

- Fully adjustable heads allow for directional aiming
- Dropdown lamp holder allows for rapid lamp installation and maintenance
- Tool-free cable termination for rapid second fix
- Tilt - 25°

Construction: Aluminium
Lamp Type: GU10 LED 10W Max.







Code	Model	Finish	Cut-out (mm)	Dimensions (mm)	Recessed Depth (mm)	Min. Void (mm)
AMA4TSBC	Quad	Brushed Chrome	L: 165 W: 165	L: 175 W: 175 P: 3	22	70
AMA4TSW	Quad	White	L: 165 W: 165	L: 175 W: 175 P: 3	22	70



ODAN SINGLE TILT ROUND TRIMLESS DOWNLIGHT

- Trim-less design, directly plastered over for discrete illumination
- Tilt as standard
- Raised light source for reduced glare
- Pull-out lamp holder allows for lamp change below the ceiling
- Tool-free cable termination for rapid second fix
- Compatible with Knightsbridge range of fire hoods

Construction: Die-cast aluminium
Lamp type: GU10 LED 10W Max.



230V 50Hz | IP20 | LAMP DEPENDENT | LAMP NOT INCLUDED | 5 YEAR WARRANTY

Code	Finish	Cut-out (mm)	Dimensions (mm)	Recessed Depth (mm)	Minimum Void (mm)
OAA1TRW	White	Ø: 106	Ø: 94 P:2	38	90

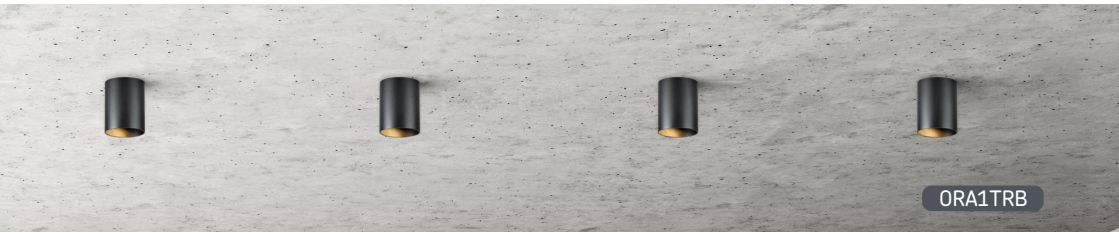

ORAN SURFACE TILT DOWNLIGHT

- Surface mount design with rear cable entry
- Raised light source to reduce glare
- Lamp holder with connector included
- Tilt - 25°

Construction: Aluminium
Lamp Type: GU10 LED 10W Max.





230V 50Hz | IP20 | LAMP DEPENDENT | LAMP NOT INCLUDED | 5 YEAR WARRANTY

Code	Finish	Model	Max. Wattage	Dimensions (mm)
ORA1TRB	Black	Round	10W	Ø: 90 P: 115
ORA1TRW	White	Round	10W	Ø: 90 P: 115
ORA1TSB	Black	Square	10W	L: 90 W: 90 P: 115
ORA1TSW	White	Square	10W	L: 90 W: 90 P: 115



DEE SINGLE SURFACE ADJUSTABLE CIRCULAR SPOTLIGHT

- Surface mount design with rear cable entry
- Adjustable head for precision aiming
- Tool-free cable connector included

Construction: Aluminium
Lamp Type: GU10 LED 10W Max.







Code	Finish	Max. Wattage	Dimensions (mm)
DEA1TRB	Black	10W	Ø: 60 P: 88
DEA1TRBC	Brushed Chrome	10W	Ø: 60 P: 88
DEA1TRW	White	10W	Ø: 60 P: 88



DEE TWIN SURFACE ADJUSTABLE CIRCULAR SPOTLIGHT

- Surface mount design with rear cable entry
- Adjustable heads for precision aiming
- Tool-free cable connector included

Construction: Aluminium
Lamp Type: GU10 LED 10W Max.







Code	Finish	Max. Wattage	Dimensions (mm)
DEA2TRB	Black	2x10W	Ø: 60 P: 88
DEA2TRBC	Brushed Chrome	2x10W	Ø: 60 P: 88
DEA2TRW	White	2x10W	Ø: 60 P: 88

DASAN SINGLE SHORT FIXED CIRCULAR PENDANT

- Pendant design with elegant cable drop to pendant head
- Supplied with 1.25m cable
- Compatible with GU10 LED lamps
- Tool-free cable connector included

Construction: Aluminium
Lamp Type: GU10 LED 10W Max.





Code	Finish	Max. Wattage	Dimensions (mm)
DAA1FRB	Black	10W	Ø: 60 H: 110
DAA1FRBC	Brushed Chrome	10W	Ø: 60 H: 110
DAA1FRW	White	10W	Ø: 60 H: 110

DASAN SINGLE LONG FIXED CIRCULAR PENDANT

- Pendant design with elegant cable drop to pendant head
- Supplied with 0.75m cable
- Tool-free cable connector included

Construction: Aluminium
Lamp Type: GU10 LED 10W Max.





Code	Finish	Max. Wattage	Dimensions (mm)
DAB1FRB	Black	10W	Ø: 60 H: 200
DAB1FRBC	Brushed Chrome	10W	Ø: 60 H: 200
DAB1FRW	White	10W	Ø: 60 H: 200

**FOR LAMPS,
SEE PAGES 444-445**



FIRE-RATED DOWNLIGHTS
GUIDE TO CERTIFICATIONS

With over 25 years' experience developing and testing fire-rated downlights, Knightsbridge has established itself as one of the UK's leading manufacturers for GU10 cannisters and integrated LED downlights.

To help you find the perfect fit for the job, we have pulled together this handy guide to the different types of certifications that you will see referenced throughout this section.

FIRE-RATED – 30/60/90 MINS

There are separate 30 minute, 60 minute, and 90 minute tests for fire rated downlights. In each test the ceiling configuration is different with ceiling thickness and joist centre spacing altered to simulate typical 30, 60, 90-minute ceiling constructions.

IC RATED DOWNLIGHTS

To date, installation of traditional downlights has been at odds with the requirements of Parts L1 A and B of the Building Regulations which are focusing on energy efficiency and energy saving.

The problem was – and remains for many standard products – that holes need to be cut in ceilings for installation. This compromises the fire and acoustic barrier of the ceiling and also results in heat loss and moisture transfer. Furthermore, to promote heat dissipation from downlights, reduce fire risk and extend lamp life, insulation is also removed from around and above the units; further compromising the thermal performance of the space.

While most fire-rated downlights now address the issues regarding fire, acoustics and moisture transfer, they still can't be covered by insulation – still creating thermal bridges that impact the energy efficiency of the ceiling and roof structures.

Knightsbridge insulation contact (IC) rated downlights solve this issue; these innovative products allow glass or rock mineral wool insulation to be laid, without gaps, directly over the units. Clever construction allows heat to dissipate through the ventilated body while maintaining the structural integrity of the ceiling and helping conformity with Building Regulations.

FIRE-RATED



TIMBER JOIST
30/60/90 mins



I- JOIST*
30/90 mins



WEB JOIST
30 mins

FULL PRODUCT GUIDE

Please refer to the below chart below for a quick summary of our ranges and their levels of IC and fire-rated certification:

Code	Downlight Range	Pages	Timber-Joist	I-Joist	Web-Joist	IC Rated
SPKEVxx	SpektroLED®EVO	236 - 241	30/60/90 minutes	30 minutes*	30 minutes	Yes
CYRxx	CyroLED	242 - 243	30/60/90 minutes (timber)	30/90 minutes*	30 minutes	Yes
RE6xx	RenuLED	244 - 245	30/60/90 minutes (timber)	30/90 minutes*	30 minutes	Yes
VFCFxx	GU10	246 - 247	30/60/90 minutes	30 minutes*	30 minutes	Yes
FRNxx	GU10	248 - 249	30/60/90 minutes	30 minutes	30 minutes	Yes

*Knightsbridge tests against staircraft style i-joists

This content is for information purposes only. Full technical guidance should be taken from the products datasheet / installation guide, which can be found at mlaccessories.co.uk.



FIXED

TILT

SpektroLED® EVO

EVOLUTION OF INNOVATION

Designed with budget in mind and the end user at heart.

Consisting of 2 models: Fixed and Tilt, 2 user-definable wattages and 4 CCT options, the **Spektro**LED® **EVO** range is available in 6 finishes and is the perfect choice for cost effective and energy efficient lighting installations.

Discover the versatile **Spektro**LED® **EVO**, also offering smart, emergency and PIR options, providing you with the freedom to customise your lighting experience.

5W
7W

2700K
3000K
4000K
6000K

IP65

FIRE RATED

IC RATED

ACOUSTIC TESTED

7 YEAR WARRANTY



WATTAGE



5W
Up to 630lm

7W
Up to 870lm

FRONT ACCESS
FULLY ADJUSTABLE CCT & WATTAGE

TOOL-LESS INSTALLATION

6000K
4000K
3000K
2700K



CCT

COMPLETE CUSTOMISATION

Experience the unparalleled versatility of the **Spektro**LED® **Evo** range. Available in both fixed and tilt variants, the range has been expanded over time to include Smart and PIR sensor options as well as compatible emergency kit

Contractors can seamlessly fine-tune lighting output through the integrated switches on our fire-rated LED downlights, ensuring the specification covers the whole, broader **Spektro**LED® **Evo** offering.

FIRE-RATED

TIMBER JOIST
30/60/90 mins

I- JOIST
30 mins

WEB JOIST
30 mins

Knightsbridge tests against staircraft style i-joists



SPEKTROLED® EVO FIXED FIRE-RATED DOWNLIGHT

- Accessible wattage and CCT switches, post installation
- Dual wattage selection; 5W and 7W
- Adjustable 2700K, 3000K, 4000K, 6000K CCTs
- Complete with first and second fix connectors with loop in-loop out
- Extremely low-profile design
- Fire-rated - 30/60/90min solid timber, 30min web joist and 30min i-joist (staircraft)
- IC rated (insulation contact)
- Acoustic rated ISO 10140-2:2010
- Dimmable**
- 6 bezel colourways available (sold separately)

Construction: Pressed steel
Driver: Integral
Lamp type: SMD LED
Beam angle: 60°



230V 50Hz | IP20 IP65 | LAMP INCLUDED | IC* RATED | QUAD CCT | 7 YEAR WARRANTY

Code	Wattage	CCT	Lumens	Cut-out (mm)	Dimensions (mm)	Recessed Depth (mm)	Min. Void (mm)
SPKEVF	5/7W	2700/3000/4000/6000K	Up to 870lm	Ø: 70	Ø: 90.5 P: 4	43	43

* With mineral wool style insulation only, please see page 235 and product instructions for more information
** Please check compatibility before installation

FIXED BEZEL FOR SPEKTROLED® EVO

Construction: Steel



Code	Finish
SPKEVFBZAB	Antique Brass
SPKEVFBZB	Brushed Brass
SPKEVFBZBC	Brushed Chrome

Code	Finish
SPKEVFBZMB	Matt Black
SPKEVFBZPC	Polished Chrome
SPKEVFBZW	White

SPEKTROLED® EVO FIXED - INSTALL PACK

- Box of 10, fittings complete with white bezels

Construction: Pressed steel
Driver: Integral
Lamp type: SMD LED
Beam angle: 60°





Code	Max. Wattage	CCT	Lumens	Cut-out (mm)	Dimensions (mm)	Recessed Depth (mm)	Min. Void (mm)
SPKEVFS10	5/7W	2700/3000/4000/6000K	Up to 870lm	Ø: 70	Ø: 90.5 P: 4	43	43

SPEKTROLED® EVO EMERGENCY KIT

- Maintained and non-maintained use
- 3-hour emergency duration



Code	Model	Dimensions (mm)
SPKEVEMKIT	3-hour emergency kit	H: 26 W: 60 L: 160

NEW

SPEKTROLED® EVO FIXED FIRE-RATED DOWNLIGHT WITH PIR SENSOR

- PIR sensor switches are accessible after installation
- Fire-rated - 30/60/90min solid timber, 30min web joist and 30min i-joist (staircraft)
- IC rated (insulation contact)
- Acoustic rated ISO 10140-2:2010
- Detection Zone: up to 5m at the height of 4m
- Hold-on Time: 5 sec to 10 min
- Ambient Light Threshold (lux): 0 to 1000lux
- Supplied with White bezel as standard

Construction: Pressed steel
Driver: Integral
Lamp type: SMD LED
Beam angle: 60°





Code	Wattage	CCT	Lumens	Cut-out (mm)	Dimensions (mm)	Recessed Depth (mm)	Min. Void (mm)
SPKEVFPIR	7W	2700/3000/4000/6000K	Up to 745lm	Ø: 70	Ø: 90.5	43	43



SpektroLED® EVO

MULTI-DIRECTIONAL
90° TILT FUNCTION



SPEKTROLED® EVO TILT FIRE-RATED DOWNLIGHTS

- Wide angle tilt, up to 90°
- Dual wattage selection; 5W and 7W
- Adjustable 2700K, 3000K, 4000K, 6000K CCTs
- Complete with first and second fix connectors with loop in-loop out
- Extremely low-profile design
- Fire-rated - 30/60/90min solid timber, 30min web joist and 30min i-joist (staircraft)
- IC rated (insulation contact)
- Acoustic rated ISO 10140-2:2010
- Dimmable**
- Fitting complete with non-removable bezel

Construction: Pressed steel
Driver: Integral
Lamp type: SMD LED
Beam angle: 60°



230V 50Hz | IP20 IP65 | LAMP INCLUDED | IC* RATED | QUAD CCT | 7 YEAR WARRANTY

Code	Wattage	Finish	CCT	Lumens	Cut-out (mm)	Dimensions (mm)	Recessed Depth (mm)	Min. Void (mm)
SPKEVTAB	5/7W	Antique Brass	2700/3000/4000/6000K	Up to 865lm	Ø: 70	Ø: 90 P: 6	Ø: 56	56
SPKEVTB	5/7W	Brushed Brass	2700/3000/4000/6000K	Up to 865lm	Ø: 70	Ø: 90 P: 6	Ø: 56	56
SPKEVTBC	5/7W	Brushed Chrome	2700/3000/4000/6000K	Up to 865lm	Ø: 70	Ø: 90 P: 6	Ø: 56	56
SPKEVTMB	5/7W	Matt Black	2700/3000/4000/6000K	Up to 865lm	Ø: 70	Ø: 90 P: 6	Ø: 56	56
SPKEVTPC	5/7W	Polished Chrome	2700/3000/4000/6000K	Up to 865lm	Ø: 70	Ø: 90 P: 6	Ø: 56	56
SPKEVTW	5/7W	White	2700/3000/4000/6000K	Up to 865lm	Ø: 70	Ø: 90 P: 6	Ø: 56	56

* With mineral wool style insulation only, please see page 235 and product instructions for more information
** Please check compatibility before installation


SPKEVTAB


SPKEVTB


SPKEVTBC


SPKEVTMB


SPKEVTPC

SpektroLED® EVO

works with Smart Life



SMART EDITION

SPEKTROLED® EVO SMART DOWNLIGHT

- 230V direct to fixture with loop in-loop out first and second fix connectors
- RGB and CCT adjustable via Smart Life app
- CCT adjustable 3000K - 6000K
- Wi-Fi Connectivity IEEE 802.11 b/g/n (2.4Ghz only)
- Complete with white bezel as standard
- Additional 5 colourways of interchangeable bezels available (Matt Black, Polished Chrome, Brushed Chrome, Brushed Brass and Antique Brass)
- Complies with the latest energy efficiency standards
- Fire-rated - 30/60/90min solid timber, 30min web joist and 30min i-joist (staircraft)
- IC rated (insulation contact)*
- Acoustic rated ISO 10140-2:2010
- Dimmable**

Construction: Pressed steel
Driver: Integral
Lamp type: SMD LED
Beam angle: 60°

230V 50Hz | IP20 IP65 | VIA APP ONLY | LAMP INCLUDED | IC* RATED | 7 YEAR WARRANTY



Code	Wattage	Colour	Lumens	Cut-out (mm)	Dimensions (mm)	Recessed Depth	Min. Void (mm)
SPKEVFKRGBW	8W	RGB+3000K-6000K	Up to 855lm	Ø: 70	Ø: 90 P: 6	43	43

* With mineral wool style insulation only, please see page 235 and product instructions for more information
** Dimmable via App only



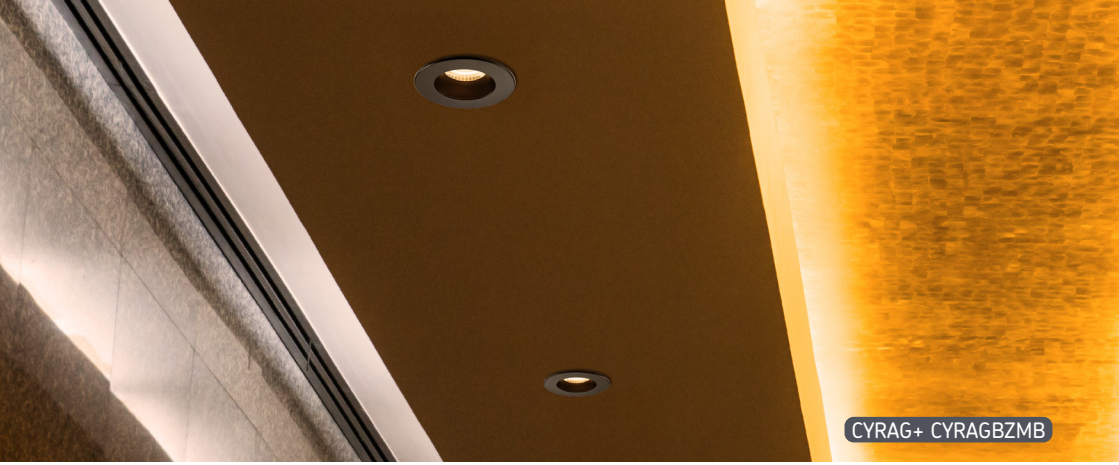

CYROLED® FIXED/TILT FIRE-RATED DOWNLIGHTS

- 230V direct to fixture with loop in-loop out first and second fix connectors
- Selectable 4W and 6W outputs
- Selectable 3000K, 4000K, 5000K, 6500K CCTs
- Complies with the latest energy efficiency standards
- Fire-rated - 30/60/90min solid timber, 30min web joist and 30/90min i-joist (staircraft)
- IC rated (insulation contact)
- Acoustic rated ISO 10140-2:2021
- Dimmable **
- IP65 from the front making it ideal for bathrooms as well as living spaces
- Product is sold without bezel. Bezels are available separately

Construction: Pressed steel
Driver: Included
Beam angle: 55°





Code	Wattage	Model	CCT	Lumens	Cut-out (mm)	Dimensions (mm)	Recessed Depth (mm)	Min. Void (mm)
CYRF	4/6W	Fixed	3000/4000/5000/6500K	Up to 790lm	Ø: 70	Ø: 86 P: 4	31	35
CYRT	4/6W	Tilt	3000/4000/5000/6500K	Up to 775lm	Ø: 70	Ø: 86 P: 4	40	43

* With mineral wool style insulation only, please see page 235 and product instructions for more information
** Please check compatibility before installation

CYROLED® BEZELS

•Compatible with CyroLED Fixed and Tilt
Construction: ABS



Code	Finish
CYRBZAB	Antique Brass
CYRBZB	Brass
CYRBZBC	Brushed Chrome

Code	Finish
CYRBZMB	Matt Black
CYRBZPC	Polished Chrome
CYRBZW	White

CYROLED® ANTI-GLARE FIRE-RATED DOWNLIGHTS

- 230V direct to fixture with loop in-loop out first and second fix connectors
- Selectable 4W and 6W outputs
- Selectable 3000K, 4000K, 5000K, 6500K CCTs
- Complies with the latest energy efficiency standards
- Fire-rated - 30/60/90min solid timber, 30min web joist and 30/90min i-joist (staircraft)
- IC rated (insulation contact)
- Acoustic rated ISO 10140-2:2021
- Dimmable **
- IP65 from the front making it ideal for bathrooms as well as living spaces
- Product is sold without bezel. Bezels are available separately

Construction: Pressed steel
Driver: Included
Beam angle: 45°





Code	Wattage	CCT	Lumens	Cut-out (mm)	Dimensions (mm)	Recessed Depth (mm)	Min. Void (mm)
CYRAG	4/6W	3000/4000/5000/6500K	Up to 730lm	Ø: 70	Ø: 86 P: 5	53	56

* With mineral wool style insulation only, please see page 235 and product instructions for more information
** Please check compatibility before installation

CYROLED® ANTI-GLARE BEZELS

Construction: ABS



Code	Finish
CYRAGBZMB	Matt Black
CYRAGBZW	White

Code	Finish
CYRAGBZWB	White with Black Baffle

CYROLED® EVO FIXED - INSTALL PACK

- Box of 10, fittings complete with white bezels

Construction: Pressed steel
Driver: Integral
Beam angle: 55°





Code	Wattage	CCT	Lumens	Cut-out (mm)	Dimensions (mm)	Recessed Depth (mm)	Min. Void (mm)
CYRFS10	4/6W	3000/4000/5000/6500K	Up to 790lm	Ø: 70	Ø: 86.4 P: 4	31	35



RENULED® FIXED FIRE-RATED DOWNLIGHTS

- Push-fit terminals with loop-in/loop-out capabilities
- Selectable colour temperature 3000/4000/6500K
- Dimmable**
- Fire-rated - 30/60/90min solid timber, 30min web joist and 30/90min i-joist (Staircraft)
- IC rated
- IP65 from the front making it ideal for bathrooms as well as living spaces
- Acoustic-rated
- Supplied with a smooth white trim
- Interchangeable bezels available in White, Matt Black, Polished Chrome, Brushed Chrome and Brass

Construction: Pressed steel
Driver: Integral
Lamp type: LED





Code	Wattage	Model	CCT	Lumens	Cut-out (mm)	Dimensions (mm)	Recessed Depth (mm)	Min. Void (mm)
RE6CTF	6W	Fixed	3000/4000/5000/6500K	Up to 665lm	Ø: 55-70	Ø: 86 P: 2	48	48

* With mineral wool style insulation only, please see page 235 and product instructions for more information
** Please check compatibility before installation

RENULED® BEZELS

- Compatible with RenuLED fixed and tilt models

Construction: ABS



Code	Finish		Code	Finish
RE6BZAB	Antique Brass	NEW	RE6BZMB	Matt Black
RE6BZB	Brass		RE6BZPC	Polished Chrome
RE6BZBC	Brushed Chrome		RE6BZW	White



RE6CTT + RE6BZB

RENULED® TILT FIRE-RATED DOWNLIGHTS

- Push-fit terminals with loop-in/loop-out capabilities
- Selectable colour temperature 3000/4000/6500K
- Dimmable**
- Fire-rated - 30/60/90min solid timber, 30min web joist and 30/90min i-joist (Staircraft)
- IC rated
- Acoustic-rated
- 20° degree tilt angle
- Supplied with white trim
- Interchangeable bezels available in Matt Black, Polished Chrome, Brushed Chrome and Brass

Construction: Pressed steel
Driver: Integral
Lamp type: LED



230V 50Hz | IP20 | LAMP INCLUDED | TRI CCT | IC* RATED | ACOUSTIC TESTED | 3 YEAR WARRANTY

Code	Wattage	Model	CCT	Lumens	Cut-out (mm)	Dimensions (mm)	Recessed Depth (mm)	Min. Void (mm)
RE6CTT	6W	Tilt	3000/4000/5000/6500K	Up to 665lm	Ø: 55-70	Ø: 86 P: 2	62	62

* With mineral wool style insulation only, please see page 235 and product instructions for more information
** Please check compatibility before installation



FIXED GU10 DOWNLIGHTS

- Fast-fix installation
- Fire-rated - 30/60/90min solid timber, 30min web joist and 30min i-joist
- Supplied with bezel which can be easily removed for decorating and painting
- Available in fixed, tilt, and IP65 options, and comes in a choice of popular finishes
- Product includes screwless terminal block; tool-free installation; loop in/loop out, fast-fix fitting

Construction: Pressed steel
Driver: Not required
Lamp type: GU10 LED





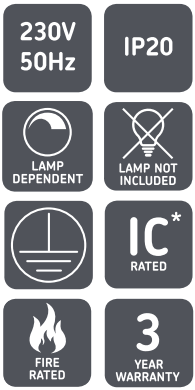

Code	Finish	Cut-out (mm)	Dimensions (mm)	Recessed Depth (mm)	Minimum Void (mm)
VFCFBC	Brushed Chrome	Ø: 65	Ø: 85 P: 4	100	150
VFCFC	Chrome	Ø: 65	Ø: 85 P: 4	100	150
VFCFW	White	Ø: 65	Ø: 85 P: 4	100	150

* 6W LED lamp with mineral wool style insulation only, please see page 235 and product instructions for more information

*Knightsbridge tests against staircraft style i-joists only

FIRE-RATED


TIMBER JOIST **30/60/90 mins**


I- JOIST * **30 mins**


WEB JOIST **30 mins**

TILT GU10 DOWNLIGHTS

Construction: Pressed steel
Driver: Not required
Lamp type: GU10 LED
Tilt angle: 15°





Code	Finish	Cut-out (mm)	Dimensions (mm)	Recessed Depth (mm)	Minimum Void (mm)
VFCFTBC	Brushed Chrome	Ø: 80	Ø: 91 P: 5	118	168
VFCFTC	Chrome	Ø: 80	Ø: 91 P: 5	118	168
VFCFTW	White	Ø: 80	Ø: 91 P: 5	118	168

* 6W LED lamp with mineral wool style insulation only, please see page 235 and product instructions for more information

IP65 GU10 DOWNLIGHTS

Construction: Pressed steel
Driver: Not required
Lamp type: GU10 LED



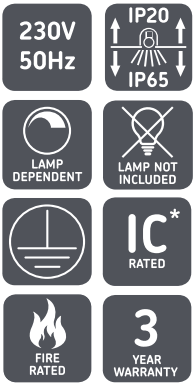

Code	Finish	Cut-out (mm)	Dimensions (mm)	Recessed Depth (mm)	Minimum Void (mm)
VFCFIPBC	Brushed Chrome	Ø: 69	Ø: 84 P: 5	168	168
VFCFIPC	Chrome	Ø: 69	Ø: 84 P: 5	168	168
VFCFIPW	White	Ø: 69	Ø: 84 P: 5	168	168

* 6W LED lamp with mineral wool style insulation only, please see page 235 and product instructions for more information

FOR LAMPS, SEE PAGES 444-445





FIRENOVA FIXED FIRE-RATED DOWNLIGHTS

- Fire-rated - 30/60/90min solid timber, 30min web joist and 30min i-joist
- Fast-fix installation with push-fit terminals
- Loop in/ loop out
- IC-rated* with suitable accessory (sold separately)
- Supplied with a matt white bezel as standard. Magnetic interchangeable bezels available separately.

Construction: Pressed steel





Code	IP Rating	Max. Wattage	Cut-out (mm)	Dimensions (mm)	Recessed Depth (mm)	Min. Void (mm)
FRNFMW	IP20	7W	Ø: 72	Ø: 85. P: 3	67	120
FRNIPMW	IP65	7W	Ø: 72	Ø: 85. P: 3	67	120

* FireNova can be IC-rated (Insulation coverable, Non-loose fill) when combined with the FRNIC bracket, with an LED lamp up to 7W Max.

FIRENOVA BEZELS AND ACCESSORIES

Construction: Polycarbonate



Code	Finish
FRNFBEZAB	Antique Brass
FRNFBEZBC	Brushed Chrome
FRNFBEZMB	Matt Black
FRNFBEZPB	Polished Brass
FRNFBEZPC	Polished Chrome

FIRENOVA IC BRACKET

Construction: Steel



Code	Finish
FRNIC	FireNova IC bracket



FIRENOVA TILT FIRE-RATED DOWNLIGHTS

- Fire-rated - 30/60/90min solid timber, 30min web joist and 30min i-joist
- Fast-fix installation with push-fit terminals
- Loop in/ loop out
- IC-rated* with suitable accessory (sold separately)

Construction: Pressed steel

Tilt angle: 20°





Code	Finish	Max. Wattage	Cut-out (mm)	Dimensions (mm)	Recessed Depth (mm)	Min. Void (mm)
FRNTAB	Antique Brass	7W	Ø: 75	Ø: 85. P: 3	67	120
FRNTBC	Brushed Chrome	7W	Ø: 75	Ø: 85. P: 3	67	120
FRNTMB	Matt Black	7W	Ø: 75	Ø: 85. P: 3	67	120
FRNTMW	Matt White	7W	Ø: 75	Ø: 85. P: 3	67	120
FRNTPB	Polished Brass	7W	Ø: 75	Ø: 85. P: 3	67	120
FRNTPC	Polished Chrome	7W	Ø: 75	Ø: 85. P: 3	67	120

* FireNova can be IC-rated (Insulation coverable, Non-loose fill) when combined with the FRNIC bracket, with an LED lamp up to 7W Max.









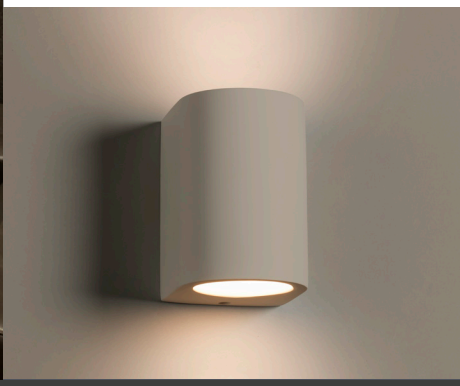

INTERIOR LIGHTING SOLUTION

CEILING & WALL LIGHTS

Decorative ceiling, track, and wall lighting, designed to enhance the look and feel of living spaces

3-CIRCUIT TRACK LIGHTING | ACCESSORIES

Introduction to K-Line	252 - 253
K-Line 3-Circuit Tracks	254
K-Line Accessories	255
Atlas Spotlights	256 - 257
Lynx Spotlight	258
Eclipse Emergency Spotlight	259

SINGLE CIRCUIT TRACK SYSTEM | ACCESSORIES

Single Circuit Tracks and Accessories	260
Single Circuit Track Lighting	261 - 263
Single Circuit Track Pendants	264
Single Circuit Light Kits	265
Spotlights	266 - 270

WALL LIGHTS

LED Plinth Lights	271
Gypsum Plaster Wall Lights | Recessed Fittings	272 - 273

K-LINE

3-CIRCUIT TRACK LIGHTING



- Three independent circuits in a single track
- Ideal for commercial, retail, and hospitality spaces
- Independent switching for instant adjustments
- Efficient design that saves time and reduces hardware

Bring flexibility and control to the forefront of your lighting design. With three circuits built into one sleek track, K-Line lets you shape spaces exactly as you want them, from spotlighting hero products to setting the perfect mood or simply brightening the room.

Unlike single-circuit systems that treat every fitting the same, K-Line gives each circuit its own voice. That means you can switch, mix, and fine-tune your lighting to suit the moment - creating zones, adjusting brightness, and transforming atmosphere in an instant. The result? A space that works as hard as it looks, with lighting that's as adaptable as your vision.

Behind this flexibility is a design built with contractors and end users in mind. By housing three independent circuits within one track, K-Line reduces the need for multiple installations while maximising control. Installers benefit from a system that is straightforward to plan, configure, and expand, while end users enjoy a space that can evolve without the need for costly rewiring.

For commercial, retail, or hospitality projects, K-Line makes it easy to balance accent, ambient, and general illumination from the same track. You can highlight displays, guide movement through a space, or provide comfortable everyday lighting - all controlled separately but delivered together in one efficient system.



NEW

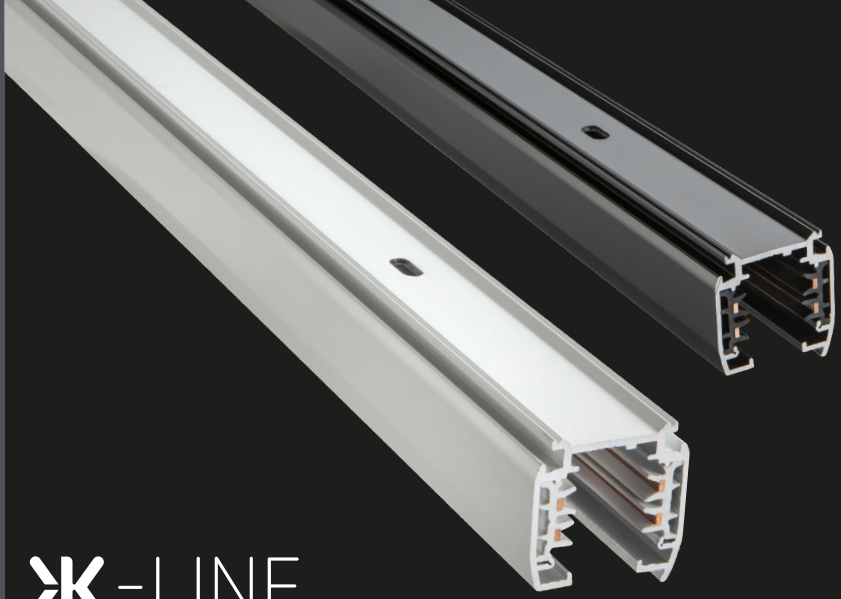

K-LINE
3-CIRCUIT TRACK

The K-Line track system is designed for flexibility. With a complete range of accessories, the installation can be configured to suit specific requirements, creating a versatile solution that meets both practical and aesthetic needs.

Construction: Aluminium

- Power feed and end required

Code	Size	Finish	Dimensions (mm)	
KL1MBK	1m	Black	L: 1000 W: 35 D: 35	NEW
KL1MW	1m	White	L: 1000 W: 35 D: 35	NEW
KL2MBK	2m	Black	L: 2000 W: 35 D: 35	NEW
KL2MW	2m	White	L: 2000 W: 35 D: 35	NEW
KL3MBK	3m	Black	L: 3000 W: 35 D: 35	NEW
KL3MW	3m	White	L: 3000 W: 35 D: 35	NEW

230V 50Hz

IP20

16A

5 YEAR WARRANTY

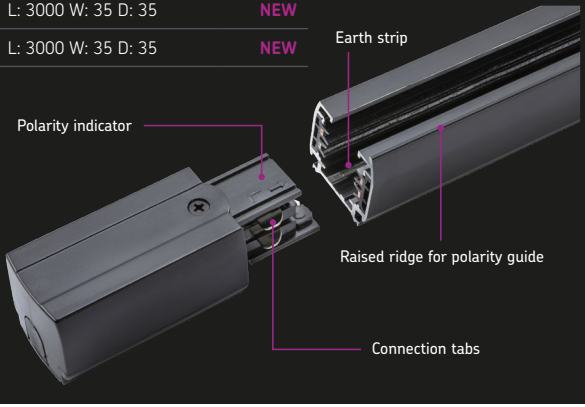

K-LINE TRACK ACCESSORIES

NEW

Construction: Aluminium

• To indicate preferred finish, replace xx on code with, BK (black), or W (white)



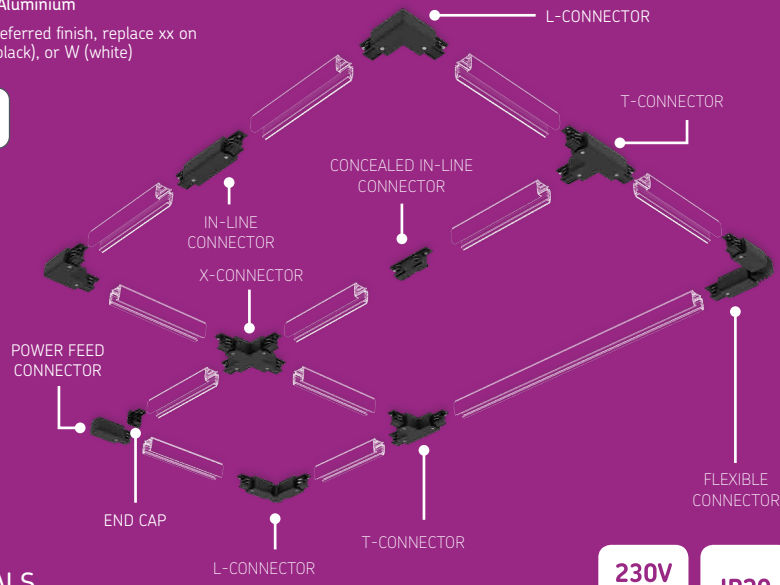

230V 50Hz

IP20

5 YEAR WARRANTY

ESSENTIALS

Code	Description	
KLPFLxx	Power Feed Left Connector	**NEW**
KLPFRxx	Power Feed Right Connector	**NEW**
KLECxx	Dead End Cap	**NEW**

ADAPTORS AND CONNECTORS

Code	Description	
KLADxx	Track Adaptor	**NEW**
KLANxx	Angle Connector	**NEW**
KLBxx	Power Concealed In-line Connector	**NEW**
KLCOLxx	Left L-Connector	**NEW**
KLCORxx	Right L-Connector	**NEW**

Code	Description	
KLFLxx	Flexible Connector	**NEW**
KLINxx	In Line Connector	**NEW**
KLTL1xx	Left T-Connector	**NEW**
KLTR1xx	Right T-Connector	**NEW**
KLXxx	X-Connector	**NEW**

SUSPENSION KITS

Code	Description	
KLSUSxx	1.5M Suspension Kit with Canopy	**NEW**
TRKSUS	3M Suspension Kit	**NEW**



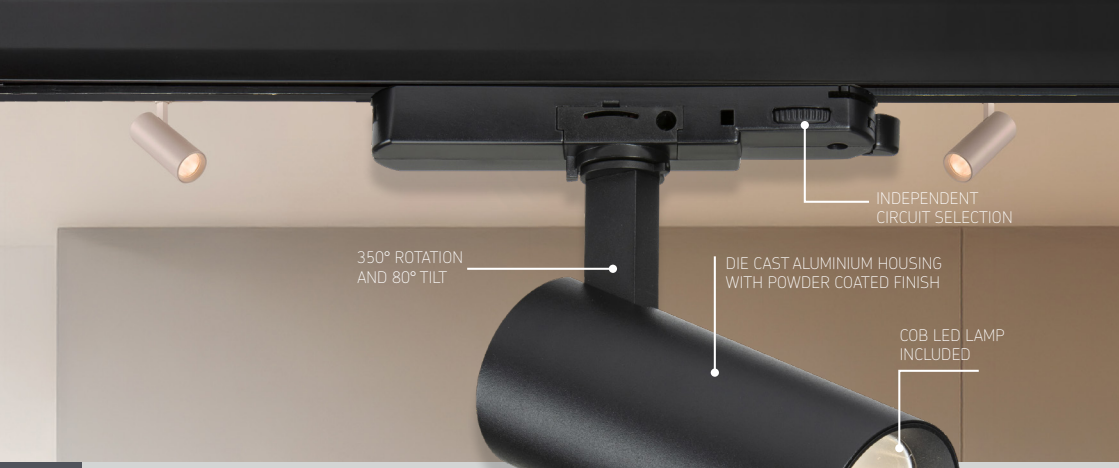

NEW

ATLAS
SPOTLIGHT

Construction: Aluminium
Lamp type: LED



230V 50Hz | IP20 | CRI 90 | 5 YEAR WARRANTY

Code	Wattage	Finish	CCT	Lumens	Dimensions (mm)	
AT14W	14W	White	3000K	1855lm	D: 60 L: 145	NEW
AT14BK	14W	Black	3000K	1855lm	D: 60 L: 145	NEW
AT24W	24W	White	3000K	3410lm	D: 80 L: 160	NEW
AT24BK	24W	Black	3000K	3410lm	D: 80 L: 160	NEW

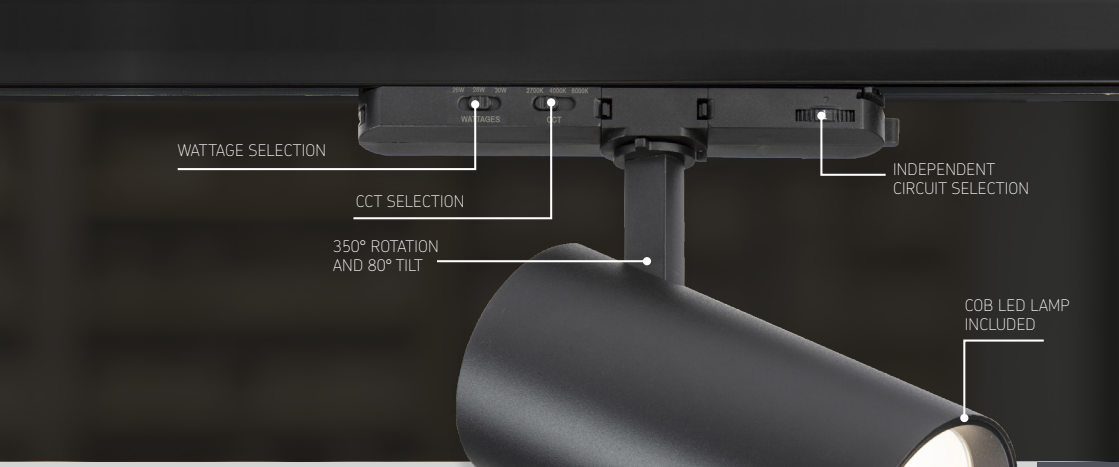

NEW

ATLAS PRO SPOTLIGHT

Construction: Aluminium
Lamp type: LED



230V 50Hz | IP20

* | CRI 90

TRI WATTAGE | TRI CCT

5 YEAR WARRANTY

Code	Wattage	Finish	CCT	Lumens	Dimensions (mm)	
ATCW15W	10/12/15W	White	2700/4000/6000K	Up to 1475lm	D: 60 L: 145	NEW
ATCW15BK	10/12/15W	Black	2700/4000/6000K	Up to 1475lm	D: 60 L: 145	NEW
ATCW30W	26/28/30W	White	2700/4000/6000K	Up to 3010lm	D: 80 L: 160	NEW
ATCW30BK	26/28/30W	Black	2700/4000/6000K	Up to 3010lm	D: 80 L: 160	NEW

*Please check compatibility before installation



NEW

LYNX
SPOTLIGHT

Construction: Aluminium
Lamp type: GU10 (max. 7W)



LYN1W



LYN2BK

230V 50Hz

IP20

LAMP NOT INCLUDED

LAMP DEPENDENT *

5 YEAR WARRANTY

Code	Finish	Dimensions (mm)	
LYN1W	White	D: 53.5 L: 100	NEW
LYN1BK	Black	D: 53.5 L: 100	NEW
LYN2W	White	D: 54.4 L: 100	NEW
LYN2BK	Black	D: 54.4 L: 100	NEW

*Please check compatibility before installation

FOR LAMPS,
SEE PAGES 444-445



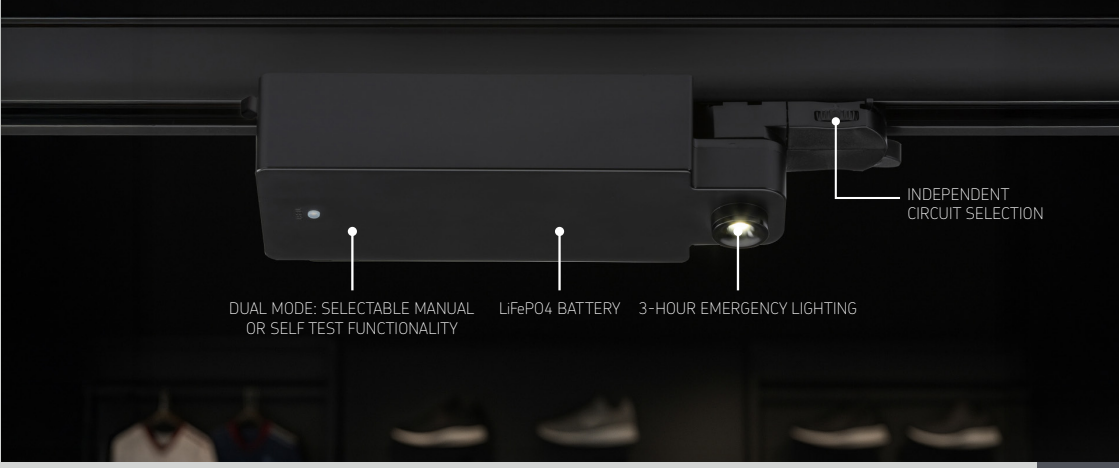

NEW

ECLIPSE
EMERGENCY SPOTLIGHT

Eclipse 3-Circuit Track System LED Emergency Spotlight offers an efficient, versatile solution for commercial spaces. Featuring a dual-function 2-in-1 design, the integrated emergency pack can be set to Self-Test or Manual mode via an internal DIP switch.

- Non-maintained use

Construction: Polycarbonate
Lamp type: LED

230V 50Hz | IP20 | DUAL MODE | LITHIUM LiFePO4 | 5 YEAR WARRANTY





Code	Wattage	Finish	CCT	Lumens	Dimensions (mm)	
ECLEMW	3W	White	6000K	Up to 149lm	L: 230 H: 72 W:65	NEW
ECLEMBK	3W	Black	6000K	Up to 149lm	L: 230 H: 72 W:65	NEW

FOR K-LINE TRACK SYSTEM, SEE PAGES 254-255



SINGLE CIRCUIT TRACK

Our single-phase track lighting is a practical lighting solution which enables the installer to create light and lighting effects suitable for commercial, retail, and domestic installations.
Track lighting enables the user to create the essential light in specific areas or as a standard light source. Minimalistic in style they can be manipulated as spot lighting for galleries and domestic kitchens etc, as well as commercial meeting rooms and retail outlets for highlighting specific area of sale, where extra spotlighting is necessary.
With a simple selection of accessories, this modest yet highly effective lighting range provides a variety of light sources and designs to suit practically any taste and application.



- Supplied complete with live and dead end
- Construction: Aluminium
- Power feed and end required

To indicate preferred finish, replace xx on code with S (satin nickel), BK (black), or W (white)



Code	Length
TRK1MAxx	1m
TRK2MAxx	2m
TRK3MAxx	3m

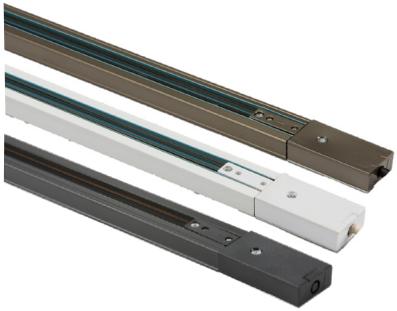

230V 50Hz | 10A | 2 YEAR WARRANTY

TRACK ACCESSORIES





Code	Model
TRKC1xx	Track Connector
TRKDE1xx	Dead End Cap
TRKFC1xx	Flexible Connector
TRKLC1xx	Inline Connector
TRKSUS	Track Suspension kit

Code	Model
TRKPF1xx	Power Feed
TRKRA1xx	Right Angle Connector
TRKT1xx	T-Connector
TRKX1xx	X-Connector

TRACK ADAPTOR



Code	Model
TRKAD1xx	Track Adaptor



230V 50Hz | IP20 | 2 YEAR WARRANTY

SINGLE CIRCUIT SPOTLIGHTS



TRKSP1

Construction: Aluminium
Lamp type: GU10

Code	Finish	Dimensions (mm)
TRKSP1ABC	Brushed Chrome	H: 142 W: 32 P: 128 L: 50
TRKSP1ABK	Black	H: 142 W: 32 P: 128 L: 50
TRKSP1AW	White	H: 142 W: 32 P: 128 L: 50



230V 50Hz | IP20 | LAMP NOT INCLUDED | LAMP DEPENDENT | 2 YEAR WARRANTY

TRKSP2

Construction: Aluminium
Lamp type: GU10

Code	Finish	Dimensions (mm)
TRKSP2ABC	Brushed Chrome	H: 145 Ø: 34 P:131 L: 50
TRKSP2ABK	Black	H: 145 Ø: 34 P:131 L: 50
TRKSP2AW	White	H: 145 Ø: 34 P:131 L: 50



230V 50Hz | IP20 | LAMP NOT INCLUDED | LAMP DEPENDENT | 2 YEAR WARRANTY

TRKSP3

Construction: Aluminium
Lamp type: GU10

Code	Finish	Dimensions (mm)
TRKSP3ABC	Brushed Chrome	H: 144 Ø: 35 P: 130 L: 50
TRKSP3ABK	Black	H: 144 Ø: 35 P: 130 L: 50
TRKSP3AW	White	H: 144 Ø: 35 P: 130 L: 50



230V 50Hz | IP20 | LAMP NOT INCLUDED | LAMP DEPENDENT | 2 YEAR WARRANTY



TRKSP4

Construction: Aluminium
Lamp type: GU10

Code	Finish	Dimensions (mm)
TRKSP4ABC	Brushed Chrome	H: 170 Ø: 58 P: 155 L: 105
TRKSP4ABK	Black	H: 170 Ø: 58 P: 155 L: 105
TRKSP4AW	White	H: 170 Ø: 58 P: 155 L: 105



230V 50Hz | IP20 | LAMP NOT INCLUDED | LAMP DEPENDENT | 2 YEAR WARRANTY

TRKSP5

Construction: Aluminium
Lamp type: GU10

Code	Finish	Dimensions (mm)
TRKSP5ABC	Brushed Chrome	H: 175 Ø: 56 P: 160 L: 75
TRKSP5ABK	Black	H: 175 Ø: 56 P: 160 L: 75
TRKSP5AW	White	H: 175 Ø: 56 P: 160 L: 75



230V 50Hz | IP20 | LAMP NOT INCLUDED | LAMP DEPENDENT | 2 YEAR WARRANTY

SUSPENSION KIT AVAILABLE
SEE PAGE 260





TRKSP8

Construction: Aluminium
Lamp type: GU10

Code	Finish	Dimensions (mm)
TRKSP8ABC	Brushed Chrome	H: 176 Ø: 56 P: 163 L: 81
TRKSP8ABK	Black	H: 176 Ø: 56 P: 163 L: 81
TRKSP8AW	White	H: 176 Ø: 56 P: 163 L: 81



230V 50Hz | IP20 | LAMP NOT INCLUDED | LAMP DEPENDENT | 2 YEAR WARRANTY

TRKSP9

Construction: Pressed steel
Lamp type: GU10

Code	Finish	Dimensions (mm)
TRKSP9AW	White	H: 140 Ø: 60 P:127 L:82
TRKSP9ABK	Black	H: 140 Ø: 60 P:127 L:82
TRKSP9ABC	Brushed Chrome	H: 140 Ø: 60 P:127 L:82



230V 50Hz | IP20 | LAMP NOT INCLUDED | LAMP DEPENDENT | 2 YEAR WARRANTY

FOR LAMPS, SEE PAGES 444-445



TRACK PENDANTS

These pendants are ideal for bringing a unique look and design to any installation and can be customised by adjusting the height and position of each fitting.

- 1.8m drop (length can be adjusted if required)
- Pre-wired to TRKxx adaptor
- Compatible with TRKxx series

Construction: Steel / Die-cast aluminium
Lamp type: E27

230V 50Hz | IP20 | LAMP NOT INCLUDED | LAMP DEPENDENT | 2 YEAR WARRANTY

AVAILABLE FINISHES

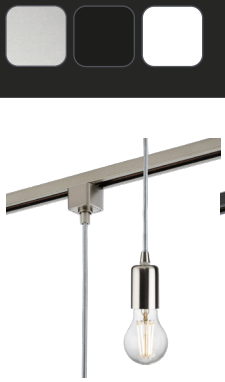



Code	Design	Finish	Dimensions (mm)
TRK8270BC	Contemporary	Brushed Chrome	L: 1800 H: 1907.5 Ø: 40
TRK8270BK	Contemporary	Black	L: 1800 H: 1907.5 Ø: 40
TRK8270W	Contemporary	White	L: 1800 H: 1907.5 Ø: 40





Code	Design	Finish	Dimensions (mm)
TRK8271BC	Vintage	Brushed Chrome	L: 1800 H: 1907.5 Ø: 51.4
TRK8271BK	Vintage	Black	L: 1800 H: 1907.5 Ø: 51.4
TRK8271W	Vintage	White	L: 1800 H: 1907.5 Ø: 51.4

TRACK LIGHT KITS



TRACK LIGHT KITS

Everything you need in one convenient bundle, supplied with:
- 1 x 1-metre circuit track
- 1 x live and dead-end accessories
- 3 x TRKSP tracklights

Construction: Aluminium
Lamp type: GU10
Tilt/rotation: 80°/350°

230V 50Hz | IP20 | LAMP NOT INCLUDED | LAMP DEPENDENT | 2 YEAR WARRANTY

TRKIT4A

Code	Finish	Dimensions (mm)
TRKIT4ABC	Brushed Chrome	W: 57 P: 172 L: 1000
TRKIT4ABK	Black	W: 57 P: 172 L: 1000
TRKIT4AW	White	W: 57 P: 172 L: 1000





TRKIT8A

Code	Finish	Dimensions (mm)
TRKIT8ABC	Brushed Chrome	W: 56 P: 180 L: 1000
TRKIT8ABK	Black	W: 56 P: 180 L: 1000
TRKIT8AW	White	W: 56 P: 180 L: 1000







SINGLE SPOTLIGHTS

- Suitable for ceiling and wall mounting

Construction: Pressed steel
Lamp type: GU10
Tilt/rotation: 90°/300°







Code	Finish	Dimensions (mm)
CSP1AB	Antique Brass	P: 125 Base Ø: 80
CSP1BC	Brushed Chrome	P: 125 Base Ø: 80
CSP1MB	Matt Black	P: 125 Base Ø: 80

TRIPLE SPOTLIGHTS

Construction: Pressed steel
Lamp type: GU10
Tilt/rotation: 90°/300°







Code	Finish	Dimensions (mm)
CSP2AB	Antique Brass	P: 125 Base Ø: 150
CSP2BC	Brushed Chrome	P: 125 Base Ø: 150
CSP2MB	Matt Black	P: 125 Base Ø: 150

SMART GU10 LED LAMPS AVAILABLE ON PAGE 459





QUAD SPOTLIGHTS

Construction: Pressed steel
Lamp type: GU10
Tilt/rotation: 90°/300°



230V 50Hz | IP20 | LAMP NOT INCLUDED | LAMP DEPENDENT | 1 YEAR WARRANTY

Code	Finish	Dimensions (mm)
CSP3AB	Antique Brass	P: 125 Base Ø: 160
CSP3BC	Brushed Chrome	P: 125 Base Ø: 160
CSP3MB	Matt Black	P: 125 Base Ø: 160

QUAD BAR SPOTLIGHTS

Construction: Pressed steel
Lamp type: GU10
Tilt/rotation: 90°/300°



230V 50Hz | IP20 | LAMP NOT INCLUDED | LAMP DEPENDENT | 1 YEAR WARRANTY

Code	Finish	Dimensions (mm)
CSP4AB	Antique Brass	P: 125 Base Width: 520 Base Length: 50
CSP4BC	Brushed Chrome	P: 125 Base Width: 520 Base Length: 50
CSP4MB	Matt Black	P: 125 Base Width: 520 Base Length: 50

FOR LAMPS,
SEE PAGES 444-445





SINGLE SPOTLIGHT

- Suitable for wall or ceiling mounting

Construction: Steel
Lamp type: GU10
Tilt/rotation: 90°/300°



230V 50Hz | IP20 | LAMP NOT INCLUDED | LAMP DEPENDENT | 1 YEAR WARRANTY

Code	Finish	Dimensions (mm)
NSPGU1BC	Brushed Chrome	P: 110 Base Ø: 80
NSPGU1W	White	P: 110 Base Ø: 80

DOUBLE SPOTLIGHT

Construction: Steel
Lamp type: GU10
Tilt/rotation: 90°/300°



230V 50Hz | IP20 | LAMP NOT INCLUDED | LAMP DEPENDENT | 1 YEAR WARRANTY

Code	Finish	Dimensions (mm)
NSPGU2BC	Brushed Chrome	W: 366 P: 135 Base Ø: 90



TRIPLE SPOTLIGHT

Construction: Steel
Lamp type: GU10
Tilt/rotation: 90°/300°



230V 50Hz | IP20 | LAMP NOT INCLUDED | LAMP DEPENDENT | 1 YEAR WARRANTY

Code	Finish	Dimensions (mm)
NSPGU3BC	Brushed Chrome	P: 110 Base Ø: 200

QUAD SPOTLIGHT

Construction: Steel
Lamp type: GU10
Tilt/rotation: 90°/300°



230V 50Hz | IP20 | LAMP NOT INCLUDED | LAMP DEPENDENT | 1 YEAR WARRANTY

Code	Finish	Dimensions (mm)
NSPGU4BC	Brushed Chrome	W: 765 P: 135 Base Ø: 90

FOR LAMPS, SEE PAGES 444-445

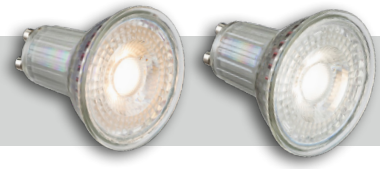



GU10 SINGLE SPOTLIGHT

- Suitable for ceiling and wall mounting

Construction: Pressed steel
Lamp type: GU10
Tilt/rotation: 180°/350°





230V 50Hz | IP20 | LAMP NOT INCLUDED | LAMP DEPENDENT | 2 YEAR WARRANTY

Code	Finish	Dimensions (mm)
CSPT1W	Matt White	L: 82 P: 132 Base: Ø: 80
CSPT1BK	Matt Black	L: 82 P: 132 Base: Ø: 80
CSPT1BC	Brushed Chrome	L: 82 P: 132 Base: Ø: 80







LED PLINTH LIGHTS

- Ideal for placement in staircases
- Fits standard UK steel back boxes and dry lining boxes
- Minimum mounting depth: 25mm
- Cool white 4000K

Construction: Stainless steel
Lamp type: LED





Code	Wattage	Finish	CCT	Lumens	Dimensions (mm)	Recessed Depth (mm)	
SFPLAB	0.8W	Antique Brass	4000K	15lm	H: 87.5 W: 87.5 P: 4.3	20.7	NEW
SFPLBB	0.8W	Brushed Brass	4000K	15lm	H: 87.5 W: 87.5 P: 4.3	20.7	NEW
SFPLBC	0.8W	Brushed Chrome	4000K	15lm	H: 87.5 W: 87.5 P: 4.3	20.7	
SFPLMB	0.8W	Matt Black	4000K	15lm	H: 87.5 W: 87.5 P: 4.3	20.7	NEW
SFPLMW	0.8W	Matt White	4000K	15lm	H: 87.5 W: 87.5 P: 4.3	20.7	
SFPLPB	0.8W	Polished Brass	4000K	15lm	H: 87.5 W: 87.5 P: 4.3	20.7	NEW



GYPSUM PLASTER WALL LIGHTS (PAINTABLE)

Modern curved up/down wall lights with a natural gypsum plaster construction

- Supplied in a stylish white finish, which can be painted using a good quality emulsion paint, enabling it to blend into surrounding walls seamlessly
- Can used in isolation or in a row of multiple fittings to create ambient lighting effects – ideal for corridors and hallways

230V 50Hz | IP20 | LAMP NOT INCLUDED | LAMP DEPENDENT | 2 YEAR WARRANTY

UP/DOWN CURVED WALL LIGHTS

Construction: Gypsum (plaster)
Lamp type: G9



Code	Model	Dimensions (mm)
PWL1	Curved	H: 180 W: 110 P: 70
PWL3	Curved	H: 120 W: 200 P:150
PWL4	Curved	H: 90 W: 180 P:100
PWL5	Curved	H: 150 W: 100 P:125

CURVED WALL LIGHTS

Construction: Gypsum (plaster)
Lamp type: E14



Code	Model	Dimensions (mm)
PWL7	Curved	H: 100 W: 300 P:150
PWL8	Curved	H: 128 W: 280 P:140

UP/DOWN CUBOID WALL LIGHTS

Construction: Gypsum (plaster)
Lamp type: G9



PWL2



PWL6

Code	Model	Dimensions (mm)
PWL2	Cuboid	H: 180 W: 110 P:70
PWL6	Cuboid	H: 150 W: 100 P:125



RECESSED GYPSUM PLASTER-IN WALL LIGHTS

Trimless, flush, recessed wall lights, with discreet lighting output.

- Supplied in a stylish white finish, which can be painted using a good quality emulsion paint, enabling it to blend into surrounding walls seamlessly
- Can used in isolation or in a row of multiple fittings to create ambient lighting effects – ideal for corridors and hallways

Construction: Gypsum (plaster)
Lamp type: GU10



PWRCR



PWRCC

Code	Model	Dimensions (mm)	Recessed Depth (mm)	Cut-out (mm)
PWRCR	Rectangular	H: 350 W: 100	73	100 x 350
PWRCC	Circular	H: 250 W: 210	78	210 x 250











DOMESTIC INTERIOR

BATHROOM

Stylish mirrors and lighting that complement any modern bathroom. This range includes shaver lights with USB ports

GU10 Bathroom Spotlights	278 - 279
LED Shaver Lights	280
LED Bathroom Mirrors	281 - 282
CCT Adjustable LED Bulkheads	283
Bathroom Wall / Shelf Lights	284

Knightsbridge

THE PERFECT FIT FOR BATHROOMS



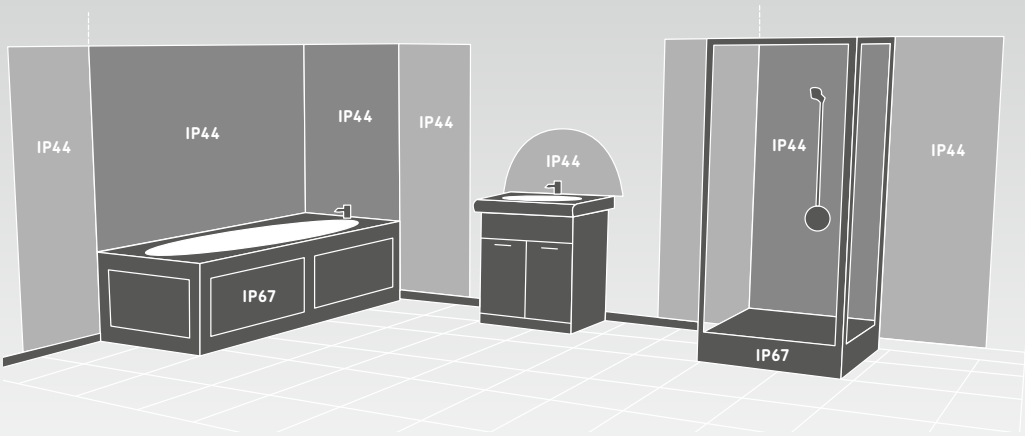

Bathroom luminaire installations must comply with legislation. This has recently been updated and is now Section 701 of BS7671:2018+A2:2022 (Wiring Regulations 18th Edition)

ZONE 0

Is inside the bath or shower itself. Any fitting used in this zone must be IP67 low voltage (max 12V).

ZONE 1

Is the area above the bath to a height of 2.25m from the floor. In this zone a minimum rating of IP44 is required.

ZONE 2

Is an area stretching 0.6m outside the perimeter of the bath and to a height of 2.25m from the floor. In this zone an IP rating of at least IP44 is required (except for shaver sockets located where direct spray is unlikely). In addition, it is good practice to consider the area around a wash basin (within a 60cm radius of any tap) as Zone 2.

OUTSIDE ZONES

Is anywhere outside zones 0, 1 and 2 (subject to specific limits) and where no water jet is likely to be used. No IP rating is required. In addition to the above, if there is a likelihood of water jets being used for cleaning purposes in zones 1, 2 and “Outside Zones” a fitting rated a minimum IP65 must be used.

A 30mA residual current device (RCD) must also be used to protect all circuits supplying the location. Full details can be found in the latest copy of IEE wiring regulations.

GU10 SINGLE SPOTLIGHT

- Adjustable head 350° rotation, 90° tilt
- Pull cord on/off switch

Construction: Pressed steel
Lamp type: GU10



230V 50Hz | IP44 | LAMP NOT INCLUDED | LAMP DEPENDENT | 1 YEAR WARRANTY

Code	Finish	Dimensions (mm)	Base (mm)
BA03S1C	Chrome	Ø: 55 H: 100 P: 123	Ø: 90 D: 26
BA03S1MB	Matt Black	Ø: 55 H: 100 P: 123	Ø: 90 D: 26
BA03S1MW	Matt White	Ø: 55 H: 100 P: 123	Ø: 90 D: 26

GU10 TRIPLE SPOTLIGHT

- Adjustable head 350° rotation, 90° tilt

Construction: Pressed steel
Lamp type: GU10



230V 50Hz | IP44 | LAMP NOT INCLUDED | LAMP DEPENDENT | 1 YEAR WARRANTY

Code	Finish	Dimensions	Base
BA03P3C	Chrome	Ø: 246 P: 122mm	Ø: 150 D: 25mm
BA03P3MB	Matt Black	Ø: 246 P: 122mm	Ø: 150 D: 25mm
BA03P3MW	Matt White	Ø: 246 P: 122mm	Ø: 150 D: 25mm

FOR LAMPS, SEE PAGES 444-445





GU10 TRIPLE BAR SPOTLIGHT

- Adjustable head 350° rotation, 90° tilt
- Suitable for ceiling and wall mounting

Construction: Pressed steel
Lamp type: GU10







Code	Finish	Dimensions (mm)	Base (mm)
BA03B3C	Chrome	Ø: 55 W: 86 P: 125	W: 400 H: 50 D: 25
BA03B3MB	Matt Black	Ø: 55 W: 86 P: 125	W: 400 H: 50 D: 25
BA03B3MW	Matt White	Ø: 55 W: 86 P: 125	W: 400 H: 50 D: 25

MATCH THE FINISH

THERE ARE A RANGE OF PRODUCTS IN MATCHING FINISHES TO KEEP INTERIOR DESIGNS CONSISTENT

SHAVER SOCKET SEE PAGE 117 - 118
CEILING LIGHT SEE PAGE 278
PULL CORD SEE PAGE 194





LED SHAVER LIGHT WITH DUAL VOLTAGE SHAVER SOCKET

- Supplied with S15 LED tube

Construction: Polycarbonate
Driver: Included
Lamp type: LED





Code	Wattage	Finish	CCT	Lumens	Dimensions (mm)
SLIGHT2	6W	White	3000K	450lm	W: 494 H: 60 P: 70

LED BATHROOM MIRROR WITH DUAL VOLTAGE SHAVER SOCKET

- Pressed steel base with high quality glass mirror
- Pull cord on/off switch
- Concealed dual voltage 115V / 230V shaver socket outlet with independent switch control
- Fixing kit included

Construction: Pressed steel
Driver: Included
Lamp type: LED





Code	Wattage	CCT	Lumens	Dimensions (mm)	Base (mm)
MLRCTM2	10W	4000K	130lm	W: 390 H: 500 P: 60	W: 350 H: 480

BACK-LIT LED BATHROOM MIRROR WITH DEMISTER, SHAVER SOCKET, AND MOTION SENSOR

- Contemporary design, featuring 360° illumination
- Pressed steel base with high quality glass mirror
- Motion sensor on/off switch
- Dual voltage 115V / 230V shaver socket outlet with independent switch control
- Built-in anti-fog 12W demister pad
- Fixings included

Construction: Pressed steel
Driver: Included
Lamp type: LED





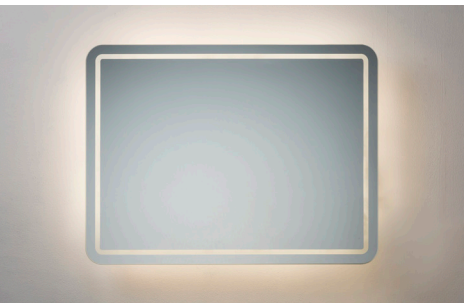

Code	Wattage	CCT	Lumens	Dimensions (mm)	Base (mm)
MLR6045SD	19W	4000K	1060lm	W: 450 H: 600 P:65	W: 355 H: 500



LED CIRCULAR BATHROOM MIRROR

- Featuring mini circular LED border design, providing evenly spread illumination
- Pressed steel base with high quality glass mirror
- Motion sensor on/off switch
- Fixings included

Construction: Pressed steel

Driver: Included

Lamp type: LED





Code	Wattage	CCT	Lumens	Dimensions (mm)	Base (mm)
ML500	14W	4000K	55lm	Ø: 500 P: 50	D: 435

LED BATHROOM MIRROR WITH DEMISTER, SHAVER SOCKET, AND MOTION SENSOR

- Pressed steel base with high quality glass mirror
- Motion sensor on/off switch
- Concealed dual voltage 115V / 230V shaver socket outlet with independent switch control
- Built-in anti-fog 16W demister pad
- Fixing kit included

Construction: Pressed steel

Driver: Included

Lamp type: LED





Code	Wattage	CCT	Lumens	Dimensions (mm)	Base (mm)
MLC6045SD	14W	4000K	80lm	W: 450 H: 600 P: 55	W: 410 H: 565



CCT ADJUSTABLE LED BULKHEAD

This versatile IP65 LED bulkhead boasts LED colour changing technology enabling the installer / end-user to adjust the colour temperature via a switch on the gear tray

- Time saving and user-friendly installation via hinged gear tray and push-fit terminal block
- Specialised polycarbonate diffuser ensures high lumen levels with smooth uninterrupted light
- Suitable for domestic and commercial applications, wall or ceiling mounted
- Supplied with black or chrome bezel

Construction: Polycarbonate
Driver: Included
Lamp type: LED



9W CCT ADJUSTABLE LED BULKHEAD



Code	Wattage	Model	Colour	CCT	Lumens	Dimensions (mm)
BT9ACTB	9W	Standard	Black	3000/4000/5700K	730/810/780lm	Ø: 256 P: 74
BT9ACTCH	9W	Standard	Chrome	3000/4000/5700K	730/810/780lm	Ø: 256 P: 74

14W CCT ADJUSTABLE LED BULKHEAD



Code	Wattage	Model	Colour	CCT	Lumens	Dimensions (mm)
BT14ACTB	14W	Standard	Black	3000/4000/5700K	1130/1260/1210lm	Ø: 315 P: 74
BT14ACTCH	14W	Standard	Chrome	3000/4000/5700K	1130/1260/1210lm	Ø: 315 P: 74

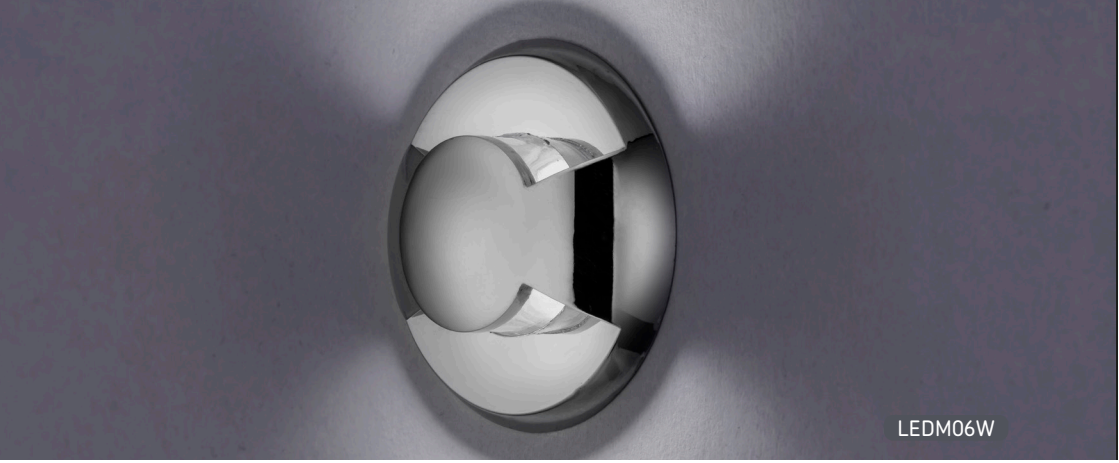

BATHROOM WALL / SHELF LIGHTS

- Comes with three interchangeable chrome-effect heads
- Perfect for creating ambient effects in bathrooms

Construction: Stainless steel & polycarbonate
Driver: Included
Lamp type: LED

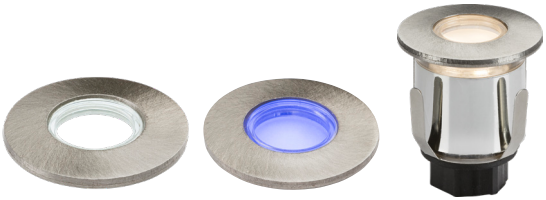



Code	Wattage	Finish	CCT	Lumens	Recessed Depth (mm)	Overall Ø (mm)	Cut-out (mm)
LEDM06B	0.6W	Brushed Steel	Blue	20lm	48	38	32
LEDM06W	0.6W	Brushed Steel	6000K	50lm	48	38	32
LEDM06WW	0.6W	Brushed Steel	3000K	25lm	48	38	32

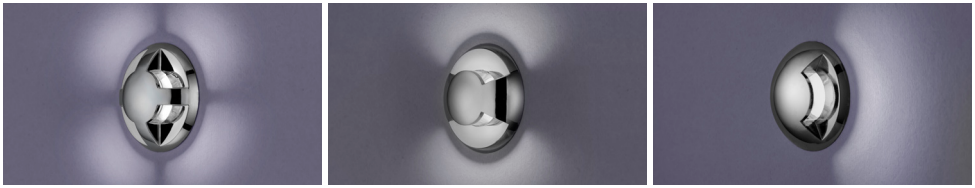

COMES WITH THREE INTERCHANGEABLE CHROME-EFFECT HEADS



Kdirect

QUALITY PRODUCTS, FIRST CLASS DELIVERY

- A quick and reliable home delivery service
- Shipping direct to your customers on YOUR behalf
- No minimum box quantities*
- No minimum order value
- Reduces commitment to stock
- No double handling
- Next day delivery across mainland UK
- Fast, efficient and professional

* Exceptions apply to fragile items



WE'RE ONLY A CLICK AWAY.











DOMESTIC INTERIOR

UNDER CABINET LIGHTING

Under cabinet lighting creates the perfect glow on kitchen worktops, providing discreet but effective illumination

CCT Adjustable LED Linkable Striplights	288
LED Linkable Striplights	289
LED Under Cabinet Lights	290 - 291
LED Dimmable Under Cabinet Light Kits	292
Under Cabinet Sockets	293



CCT ADJUSTABLE LED LINKABLE STRIPLIGHTS

- Selectable colour temperature 3000/4000/6500K

Construction: Polycarbonate
Driver: Integral
Lamp type: LED

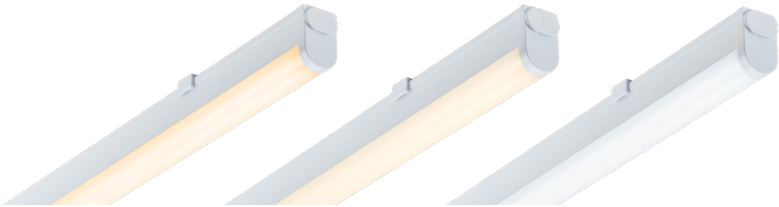

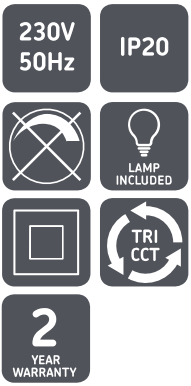

Code	Wattage	CCT	Lumens	Dimensions (mm)	Qty
UCLCT4	4W	3000/4000/6500K	350/390/370lm	W: 22.8 L: 277 P: 36	1
UCLCT9	9W	3000/4000/6500K	685/690/675lm	W: 22.8 L: 538 P: 36	1
UCLCT13	13W	3000/4000/6500K	1055/1055/1025lm	W: 22.8 L: 838 P: 36	1
UCLCT18	18W	3000/4000/6500K	1675/1915/1780lm	W: 22.8 L: 1138 P: 36	1



VERTICAL AND HORIZONTAL FIXINGS INCLUDED



CONNECTION COVER



LINKABLE

Ultra-slim LED striplights, ideal for kitchen lighting, cabinet lighting, cove lighting, and retail applications. Linkable end-to-end by a coupler (included) or using link leads (available separately). Up to a maximum of 12 units can be interlinked to each other

- Integral driver, independently switched
- Energy efficient and long life
- Emits an even light distribution
- Versatile and simple to install
- Mountable horizontally or vertically
- Fixing kit supplied

LED LINKABLE STRIPLIGHTS

Construction: Polycarbonate
Driver: Integral
Lamp type: LED



230V 50Hz | IP20 | LAMP INCLUDED | 3 YEAR WARRANTY

Code	Wattage	CCT	Lumens	Dimensions (mm)	Qty
UCLED4WW	4W	3000K	310lm	L: 277 W: 22.8 P: 36	1
UCLED7WW	7W	3000K	530lm	L: 395 W: 22.8 P: 36	1
UCLED9WW	9W	3000K	640lm	L: 538 W: 22.8 P: 36	1
UCLED13WW	13W	3000K	950lm	L: 838 W: 22.8 P: 36	1
UCLED18WW	18W	3000K	1450lm	L: 1138 W: 22.8 P: 36	1
UCLED22WW	22W	3000K	1550lm	L: 1438 W: 22.8 P: 36	1
UCLED4CW	4W	4000K	360lm	L: 277 W: 22.8 P: 36	1
UCLED7CW	7W	4000K	570lm	L: 395 W: 22.8 P: 36	1
UCLED9CW	9W	4000K	760lm	L: 538 W: 22.8 P: 36	1
UCLED13CW	13W	4000K	1020lm	L: 838 W: 22.8 P: 36	1
UCLED18CW	18W	4000K	1550lm	L: 1138 W: 22.8 P: 36	1
UCLED22CW	22W	4000K	1730lm	L: 1438 W: 22.8 P: 36	1



VERTICAL AND HORIZONTAL FIXINGS INCLUDED



CONNECTION COVER



LINKABLE

ACCESSORIES







Code	Model	Length
UC250	Link Power Cord	250mm
UC500	Link Power Cord	500mm
UC1000	Link Power Cord	1000mm

Code	Model	Length
UCP200	Power Cable	2000mm
UCCUP	Coupler / Connector	



230V 2W LED UNDER CABINET LIGHT WITH ADJUSTABLE CCT

- Suitable for surface and recessed mounting
- Adjustable CCT (3000K, 4000K or 5000K) via switch

Construction: Pressed steel
Driver: Integral
Lamp type: LED

RECESS MOUNTED / SURFACE MOUNTED

230V 50Hz | IP20 | LAMP INCLUDED | TRI CCT | 3 YEAR WARRANTY



Code	Wattage	Finish	CCT	Lumens	Dimensions (mm)	Cut-out (mm)
CABCTBC	2.5W	Brushed Chrome	3000/4000/5000K	135/140/135lm	Ø: 73 P: 30	58
CABCTC	2.5W	Chrome	3000/4000/5000K	135/140/135lm	Ø: 73 P: 30	58
CABCTW	2.5W	White	3000/4000/5000K	135/140/135lm	Ø: 73 P: 30	58
CABCTMB	2.5W	Matt Black	3000/4000/5000K	135/140/135lm	Ø: 73 P: 30	58

DUAL MOUNTABLE

LOW ENERGY, LONG LIFE, LOW MAINTENANCE





230V 2W LED TRIANGULAR UNDER CABINET LIGHT WITH ADJUSTABLE CCT

- Adjustable CCT (3000K, 4000K or 5000K) via switch

Construction: Pressed steel
Driver: Integral
Lamp type: LED



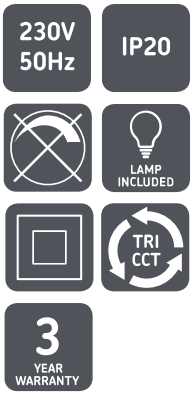

Code	Wattage	Finish	CCT	Lumens	Dimensions (mm)
TRIBCTBC	2.5W	Brushed Chrome	3000/4000/5000K	135/140/135lm	L: 128 W: 128 P: 43

MATCHING BRUSHED CHROME KITCHEN SOCKETS AVAILABLE, SEE PAGE 121





ALL-IN-ONE LED UNDER CABINET LIGHTS

- Stylish, low profile.
- Available in 3000K and 4000K
- Users can add additional lights (up to 6 per driver)
- Suitable for surface and recessed mounting
- Pre-wired with 2.5m cable

Construction: Polycarbonate
Driver: Included with kits (not included with single lights)
Lamp type: LED



230V 50Hz | IP20 | LAMP INCLUDED | 3 YEAR WARRANTY

RECESS MOUNTED / SURFACE MOUNTED

ALL-IN-ONE 3X KIT FITTING

- Supplied complete with 3 lights, 6-way connector, and a dimmable LED remote driver.

Code	Wattage	Finish	CCT	Lumens	Dimensions (mm)	Cut-out (mm)
UNDKIT3WWW	3 x 2.5W	White	3000K	195lm	Ø: 68 P: 11	63
UNDKIT3BCWW	3 x 2.5W	Brushed Chrome	3000K	185lm	Ø: 68 P: 11	63
UNDKIT3WCW	3 x 2.5W	White	4000K	225lm	Ø: 68 P: 11	63
UNDKIT3BCCW	3 x 2.5W	Brushed Chrome	4000K	220lm	Ø: 68 P: 11	63

350mA

SINGLE UNDER CABINET FITTING

- The All-in-One Kit can be extended to up to 6 fittings with individual fittings.

Code	Wattage	Finish	CCT	Lumens	Dimensions (mm)	Cut-out (mm)
UNDK3WWW	2.5W	White	3000K	195lm	Ø: 68 P: 11	63
UNDK3WCW	2.5W	White	4000K	225lm	Ø: 68 P: 11	63
UNDK3BCCW	2.5W	Brushed Chrome	4000K	220lm	Ø: 68 P: 11	63

6-WAY CONNECTOR ACCESSORY

Code	Model
UNDKCON	6-Way Connector







NEW

13A 2G UNDER CABINET SOCKET WITH BUILT IN 5W LED STRIP LIGHT

- Mount Under cabinet or Counter top against wall (units have open backs)



SKR8L



SKR94L



Code	Model	Finish	CCT	Lumen	Dimensions (mm)	Insert	
SKR8L	2G DP	Stainless Steel	4000K	250lm	H: 212.5 W: 212.5 P: 73.3	Grey	NEW
SKR94L	2G SP + Dual USB A+C Charger	Stainless Steel	4000K	250lm	H: 212.5 W: 212.5 P: 73.3	Grey	NEW











LED FLEX

Extremely versatile and adaptable, LED Flex can be used to create stunning ambient lighting effects across a wide range of applications

Introduction to LED Flex	296 - 297
12V IP20 Single Colour LED Flex	298
24V IP20 Single Colour LED Flex	299
24V IP20 Colour-Changing LED Flex	300
24V IP20 High Lumen LED Flex	301
LED Flex Connectors and Accessories	302
LED Flex Drivers	303 - 304
LED Flex Remotes and Controllers	305
LED Flex Profiles	306



LED FLEX

HIGHLY VERSATILE
Our LED Flex range is extremely versatile and adaptable, with a huge array of different lighting colours and outputs, including colour-changing, high lumen option. Whatever the application, we're sure to have the perfect fit!

AMBIENT LIGHTING EFFECTS
Create stunning ambient lighting effects anywhere indoors or outdoors, with subtle tones that can complement any space. LED Flex can be particularly effective for illuminating under-cabinet spaces in kitchens, but the possibilities are endless!

WIDE RANGE OF ACCESSORIES
One convenient place for everything you need for LED Flex, from Drivers to Profiles, there's no need to look elsewhere

REMOTE CONTROL
Our range of LED Flex lighting can be controlled remotely, either by a remote control or (when installed with our Smart LEDFWIFI Controller) via the Smart Life App on your smartphone. The Smart Life app enables scene control, geo-fencing, and other creative and convenient ways to control your lighting.

OPTIONS AVAILABLE:

- 12V IP20 SINGLE COLOUR LED FLEX
- 24V IP20 SINGLE COLOUR LED FLEX
- IP20 COLOUR-CHANGING LED FLEX
- IP20 HIGH LUMEN LED FLEX









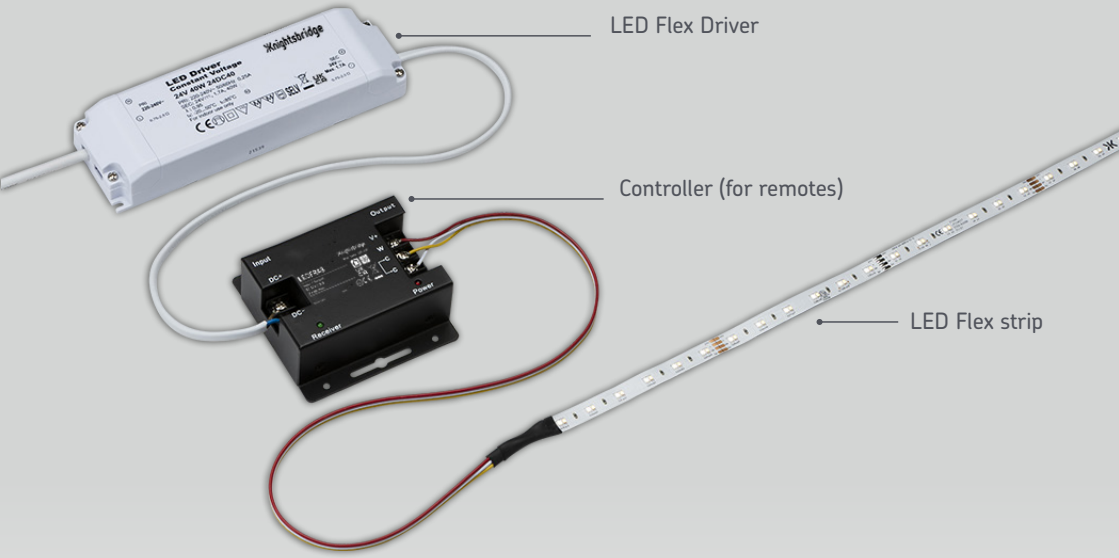

BEST PRACTICE

1 **Clean the surface area before installation**
This ensures the longevity of the self-adhesive tape, included on all LED Flex lighting

2 **Use the correct fixing method**
Some surfaces, such as uneven stone or any exterior surface, are better suited for screw-in clips rather than the self-adhesive tape.

3 **Ensure the best driver for the total wattage is chosen**
[Wattage per metre] x [Length of LED Flex run] = Total Wattage

4 **Ensure the copper connecting points are cut evenly**
This minimises the risk of broken electrical currents

5 **Ensure the IP rating is maintained**
When cutting IP67 LED Flex, ensure the connection points are properly closed off (this can be done with silicone glue, rubber end caps, and heat shrinkable tubing)



12V IP20 SINGLE COLOUR LED FLEX

- Dimmable when using compatible remote control unit, or when using constant voltage dimmable drivers (not included)

Driver: Required

Compatible remotes: LEDFRA1 or **LEDFRA7**

12V

IP20

3 YEAR WARRANTY

Light colour	Code	Wattage/m	Lumens/m	LEDs/m	Width (mm)	Projection (mm)	Cut section (mm)	CRI
Warm White - 3000K	LFX512WW	4.8W	510lm	60	8	1.2	100	>80
Cool White - 4000K	LFX512CW	4.8W	535lm	60	8	1.2	100	>80
Daylight - 6000K	LFX512DL	4.8W	520lm	60	8	1.2	100	>80







DRIVERS, CONNECTORS AND ALUMINIUM PROFILES AVAILABLE ON PAGE 302-306









24V IP20 SINGLE COLOUR LED STRIP LIGHTING

- Dimmable when using compatible remote control unit, or when using constant voltage dimmable drivers (not included)

Driver: Required
Compatible remotes: LEDFRA1 or **LEDFRA7**

24V IP20

3 YEAR WARRANTY



Light colour	1m length	3m length	5m length	50m length
Warm White - 3000K	LFC24WW1M	LFC24WW3M	LFC24WW5M	LFC24WW
Cool White - 4000K	LFC24CW1M	LFC24CW3M	LFC24CW5M	LFC24CW
Daylight - 6000K	LFC24DL1M	LFC24DL3M	LFC24DL5M	LFC24DL

Light colour	Wattage/m	Lumens/m	LEDs/m	Width (mm)	Projection (mm)	Cut section length (mm)	CRI
Warm White - 3000K	4.8W	500lm	60	8	1.2	100	>80
Cool White - 4000K	4.8W	525lm	60	8	1.2	100	>80
Daylight - 6000K	4.8W	530lm	60	8	1.2	100	>80

DRIVERS, CONNECTORS AND ALUMINIUM PROFILES AVAILABLE ON PAGE 302-306





24V IP20 COLOUR-CHANGING LED STRIP LIGHTING

- Dimmable and colour changing when used with compatible remote control unit (not included)

Driver: Required
Compatible remotes: CCT adjustable: **LEDFR8** / RGB: **LEDFRA9** / RGBW: **LEDFRA6**



Light colour	1m length	3m length	5m length	30m length
CCT adjustable 2700K-6000K	LFC24CCT1M	LFC24CCT3M	LFC24CCT5M	LFC24CCT
RGB	LFC24RGB1M	LFC24RGB3M	LFC24RGB5M	LFC24RGB
RGBW	LFC24RGBW1M	LFC24RGBW3M	LFC24RGBW5M	LFC24RGBW

Light colour	Wattage/m	Lumens/m	LEDs/m	Width (mm)	Projection (mm)	Cut section length (mm)	CRI
CCT adjustable 2700K-6000K	11W	Up to 910lm	120	10	1	100	>90
RGB	9W	-	36	10	1.8	166	-
RGBW	9W	260lm	36	12	1.8	166	>85





DRIVERS, CONNECTORS AND ALUMINIUM PROFILES AVAILABLE ON PAGE 302-306





24V IP20 HIGH LUMEN LED STRIP LIGHTING

- Dimmable when using compatible remote control unit, or when using constant voltage dimmable drivers (not included)

Driver: Required

Compatible remotes: LEDFRA1 or **LEDFRA7**

24V

IP20

3 YEAR WARRANTY

Light colour	1m length	3m length	5m length	30m length
Warm White - 3000K	LFC24HLWW1M	LFC24HLWW3M	LFC24HLWW5M	LFC24HLWW
Cool White - 4000K	LFC24HLCW1M	LFC24HLCW3M	LFC24HLCW5M	LFC24HLCW
Daylight - 6000K	LFC24HLDL1M	LFC24HLDL3M	LFC24HLDL5M	LFC24HLDL

Light colour	Wattage/m	Lumens/m	LEDs/m	Width (mm)	Projection (mm)	Cut section length (mm)	CRI
Warm White - 3000K	9.6W	1,260lm/m	128	8	1.2	62.5	>80
Cool White - 4000K	9.6W	1,300lm/m	128	8	1.2	62.5	>80
Daylight - 6000K	9.6W	1,250lm/m	128	8	1.2	62.5	>80





DRIVERS, CONNECTORS AND ALUMINIUM PROFILES AVAILABLE ON PAGE 302-306





12V/24V LED FLEX CONNECTORS

Our extensive range of connectors and accessories enables installers to create seamless lighting effects with LED Flex.



1 YEAR WARRANTY

BASICS

Code	Model
LFCON2P	Connector - Pack of 2 - Single Colour
LFCONSS2P	Strip to Strip Connector - Single Colour



1 YEAR WARRANTY

CONNECTING PIECE (Requires LFCON2SS, LFCON2P, LFCON2FX or LFCONSS2P)

Code	Model
LFCON2T	3-way T-connector - Single Colour
LFCON2X	4-way X-connector - Single Colour



1 YEAR WARRANTY

HIPPO IP20

Code	Model
LFCON2SS	Strip to Strip Connector - Single Colour
LFCON2WS	Wire to Strip Connector - Single Colour
LFCON2FX	Strip to Strip 150mm Connector - Single Colour
LFCON4FX	Strip to Strip 150mm Connector - RGB / CCT
LFCON5FX	Strip to Strip 150mm Connector - RGBW



1 YEAR WARRANTY

HIPPO IP65

Code	Model
LFCONIP2SS	IP65 Strip to Strip Connector - Single Colour
LFCONIP2WS	IP65 Wire to Strip Connector - Single Colour
LFCONIP2FX	IP65 Strip to Strip 150mm Connector - Single Colour
LFCONIP4FX	IP65 Strip to Strip 150mm Connector - CCT / RGB

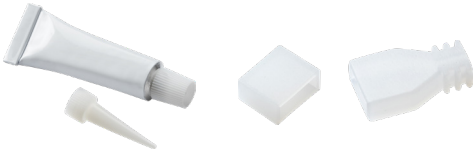

1 YEAR WARRANTY

LED FLEX SILICONE GLUE / FRONT & END CAP

Code	Model
LFCONIPG	LED Flex Silicone Glue 10ml
LFCCAP	Pack of 10 Silicone Glue Caps
LFCFIX10	LFC IP67 Front and End Cap 10mm
LFCFIX12	LFC IP67 Front and End Cap 12mm

IP20 12V LED CONSTANT VOLTAGE DRIVERS



1 YEAR WARRANTY

3 YEAR WARRANTY

Code	Model
12VDCA	12V 12W
12DC40	12V 40W
12DC75*	12V 75W

*3 Year Warranty

IP20 24V LED CONSTANT VOLTAGE DRIVERS

*3 Year Warranty



1 YEAR WARRANTY

3 YEAR WARRANTY

Code	Model
24VDCA	24V 12W
24DC40	24V 40W
24DC75*	24V 75W

24V CONSTANT VOLTAGE DRIVERS

- Adjustable output voltage
- Input voltage from 100 to 230V
- Short circuit, overload, and over voltage protection

Code	Model
24DC100M	24V IP20 100W DC Driver
24DC150M	24V IP20 150W DC Driver
24DC200M	24V IP20 200W DC Driver



3 YEAR WARRANTY

IP20 LED DIMMABLE CONSTANT VOLTAGE DRIVERS

- Compatible with most trailing edge dimmers

Code	Model
12DC25D	12V 25W
12DC50D	12V 50W
24DC25D	24V 25W
24DC50D	24V 50W
24DC100D	24V 100W



3 YEAR WARRANTY

24V IP67 40W DC LED DRIVER CONSTANT VOLTAGE

- Compatible with most trailing edge dimmers

Code	Model
24DCIP40	24V 40W
24DCIP60P	24V 60W
24DCIP100A	24V 100W

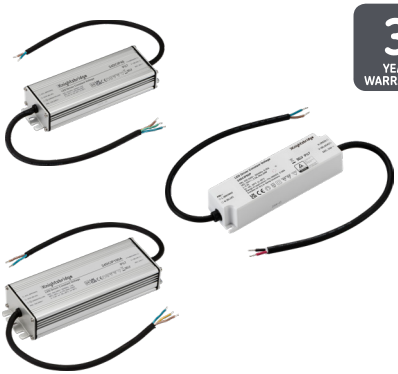

3 YEAR WARRANTY

LED FLEX REMOTES AND CONTROLLERS

A selection of remotes and controllers for use with Knightsbridge LED flex, ranging from basic button remotes to touch panel remotes for an extensive range of dimming colour controls

1 YEAR WARRANTY



Code	Model	12V	24V
LEDFRA1	12V / 24V Inline RF Controller and Remote - Dimmer Single Colour	72W	144W
LEDFRA6	12V / 24V RF Touch Controller and Remote - RGBW	288W	576W
LEDFRA7	12V / 24V RF Controller and Touch Remote - Dimmer Single Colour	216W	432W
LEDFRA8	12V / 24V RF Controller and Touch Remote - CCT	144W	288W
LEDFRA9	12V / 24V RF Controller and Touch Remote - RGB	216W	432W



SMART LED FLEX CONTROLLER

- Compatible with single colour, CCT, RGB, and RGBW flex
- Enables users to adjust the colour temperature of their LED Flex via the Smart Life app
- RGB and RGBW LED flex only: enables users to adjust the RGB colour, with over 16 million colour options via the SmartKnight app

2 YEAR WARRANTY



Code	Model
LEDFWIFI	12V/24V LED Flex WIFI Controller

works with Smart Life

ALUMINIUM PROFILES



1MC0R



1MFLR



1MPLA



1MREC



1MSUR



1MSURBK



1MSURW

Model	Dimensions (W x P) (mm)	1m code	2m code	End cap code	Suggested application	Compatible Max. Width (mm)
Surface Mount Corner	16 x 16	1MC0R	2MC0R	1MC0RCAP	Under cabinets or shelving	10
Floor Recessed	27.2 x 2	1MFLR	2MFLR	1MFLRCAP	Floor installations	12
Plaster-in Recessed	55 x 3	1MPLA	2MPLA	1MPLACAP	Wall installations	12
Recessed Mount	25 x 1	1MREC	2MREC	1MRECCAP	Discreet cabinet and shelf lighting	12
Surface Mount Flat	17 x 7	1MSUR	2MSUR	1MSURCAP	Under cabinets or shelving	12
Surface Mount Flat - Black	17 x 7	1MSURBK	-	1MSURBKCAP	Under cabinets or shelving	12
Surface Mount Flat - White	17 x 7	1MSURW	-	1MSURWCAP	Under cabinets or shelving	12

1m/2m profiles come with 2/4 mounting clips and 2/2 end-caps
* Profiles not compatible with IP67 LED Flex

WIRING ACCESSORIES

INCLUDING SWITCHES, SOCKETS, USB TECHNOLOGY, GRID OPTIONS AND MORE

Complying with British Safety Standards and offering a robust 25-year warranty, the Knightsbridge range is among the most extensive on the market. Our selection offers a dependable and adaptable choice for any wiring requirement.



SCREWLESS | LOW PROFILE

PREMIUM GRADE METAL CONSTRUCTION



ROUNDED EDGE



FLAT PLATE | LOW PROFILE



SQUARE EDGE

ANTHRACITE | BRUSHED CHROME | BLACK NICKEL | MATT BLACK | MATT WHITE | POLISHED BRASS | POLISHED CHROME | SMOKED BRONZE | ANTIQUE BRASS | PEARL | BRUSHED BRASS

Certain finishes may not be accessible across all ranges. Please refer to the specific range to verify the available finishes.

MOULDED THERMOSET RESIN



SQUARE EDGE



CURVED EDGE











OUTDOOR LIGHTING

OUTDOOR WALL LIGHTS & BOLLARDS

A comprehensive range of decorative outdoor wall and bollard lighting, perfect for illuminating garden walkways and patios

WALL LIGHTS

IP65 Wall Lights	312 - 313
IP44 Wall Lights with PIR Sensor | IP44 Heavy Gauge Wall Lights	314 - 315
IP65 Polycarbonate Wall Lights	316
IP54 Polycarbonate Wall Lights	317
IP44 Polycarbonate PIR Wall Lights	318
IP44 Polycarbonate Coach Lanterns	319
IP54 LED Lanterns	320
IP23 Stainless Steel Lanterns	321
IP54 & IP44 Wall/Guide Lights	322 - 323
IP65 LED Adjustable Up/Down Wall Lights	324
IP65 LED Surface Mount Bricklights	325
IP54 LED Bricklight / IP44 E27 Bricklight	326
IP65 Wall Packs	327 - 328

BOLLARDS & PEDESTALS

Polycarbonate CCT LED Bollard	330
GU10 Bollard	331
LED Bollards	332 - 333

Note: Some of our outdoor products may not be suitable for use in coastal areas where salt corrosion is prevalent. Please see our new Polycarbonate outdoor collection of lights and bollards that have been manufactured especially for that type of environment

Knightsbridge

THE PERFECT FIT FOR OUTDOORS



FLOODLIGHTS



WALL LIGHTS



WEATHERPROOF ACCESSORIES

SPIKE LIGHTS

SENSORS



BOLLARDS



GROUND LIGHTS

Important: Some of our outdoor lighting products may not be suitable for use in coastal areas where salt corrosion is prevalent.

KNOW YOUR IP RATING

IPXX

First digit
Indicates the level of protection against access to hazardous parts and the ingress of solid objects

1	**>50mm** Protection against any large surface of the body, such as the back of a hand, but no protection against deliberate contact
2	**>12.5mm** Protection against fingers or similar objects
3	**>2.5mm** Protection against tools, thick wires, etc
4	**>1mm** Protection against most wires, slender screws, large insects etc
5	**Dust protected** Protection against dust that may harm equipment
6	**Dust tight** No ingress of dust; complete protection against ingress

Second digit
Indicates the level of protection against the harmful ingress of water

1	**Dripping water** Protection against vertical drops when mounted in an upright position onto a turntable and rotated at 1 RPM
2	**Dripping water (tilted)** Protection against water droplets when tilted up to 15° from vertical
3	**Spraying water** Protection against water spray from all up to an angle of 60 degrees
4	**Splashing water** Protection against splashing water from any direction
5	**Water jets** Protection against low pressure jets of water from any direction
6	**Powerful Water jets** Protection against high pressure jets of water from any direction

Please note, IPX7 and IPX8 are tested using different methods from IPX6 and below. Products with IPX7 or IPX8 ratings are not necessarily protected from water jets or splashes

7	**Immersion up to 1m** Protection from immersion in water under defined conditions of pressure and time
8	**Immersion beyond 1m** Protection from immersion in water under defined conditions of pressure and time

BS 7671:2018+A2:2022



WALL1L WALL LIGHT

Construction: 304 Stainless steel
(**WALL1LBK**: Die-cast aluminium)
Lamp type: GU10









Code	Finish	Dimensions (mm)	Base (mm)
WALL1L	Stainless Steel	H: 120 Ø: 60 P: 86	Ø: 78
WALL1LBK	Black	H: 112 Ø: 64 P: 94	Ø: 78
WALL1LC	Copper Effect	H: 120 Ø: 60 P: 86	Ø: 78

Important: Some of our outdoor lighting products may not be suitable for use in coastal areas where salt corrosion is prevalent.





WALL2L UP DOWN WALL LIGHT

Construction: 304 Stainless steel
(**WALL2LBK**: Die-cast aluminium)
Lamp type: GU10







230V 50Hz | IP65 | LAMP DEPENDENT | LAMP NOT INCLUDED | 1 YEAR WARRANTY

Code	Finish	Dimensions (mm)	Base (mm)
WALL2L	Stainless Steel	H: 162 Ø: 60 P: 86	Ø: 78
WALL2LBK	Black	H: 166 Ø: 64 P: 94	Ø: 78
WALL2LC	Copper Effect	H: 162 Ø: 60 P: 86	Ø: 78

WALL3L WALL LIGHT

Construction: 304 Stainless steel
(**WALL3LBK**: Die-cast aluminium)
Lamp type: GU10







230V 50Hz | IP65 | LAMP DEPENDENT | LAMP NOT INCLUDED | 1 YEAR WARRANTY

Code	Finish	Dimensions (mm)	Base (mm)
WALL3L	Stainless Steel	H: 140 Ø: 60 P: 155	Ø: 78
WALL3LBK	Black	H: 145 Ø: 64 P: 166	Ø: 78
WALL3LC	Copper Effect	H: 140 Ø: 60 P: 155	Ø: 78

Important: Some of our outdoor lighting products may not be suitable for use in coastal areas where salt corrosion is prevalent.



WALL LIGHT WITH PIR SENSOR

- Sensor detection range 8m when mounted at 2.4m
- PIR field of detection: 110°
- Includes manual override

Construction: 304 Stainless steel
Lamp type: GU10



230V 50Hz | IP44 | LAMP NOT INCLUDED | 1 YEAR WARRANTY

Code	Model	Finish	Dimensions (mm)	Base (mm)
WALL4LSS	Up/Down wall light	Stainless Steel	H: 222 Ø: 60 P: 112	H: 184 W: 60 D 30
WALL5LSS	Down	Stainless Steel	H: 184 Ø: 60 P: 112	H: 184 W: 60 D 30

Important: Some of our outdoor lighting products may not be suitable for use in coastal areas where salt corrosion is prevalent.



HEAVY GAUGE WALL LIGHTS

Construction: 304 Stainless steel
Lamp type: GU10

230V 50Hz | IP65 | LAMP DEPENDENT | LAMP NOT INCLUDED | 1 YEAR WARRANTY



Code	Model	Finish	Dimensions (mm)	Base (mm)
WALL1	Down	Stainless Steel	H: 108 Ø: 62 P: 92	Ø: 76
WALL2	Up/Down wall light	Stainless Steel	H: 160 Ø: 62 P: 92	Ø: 76
WALL3	Down	Stainless Steel	H: 140 Ø: 62 P: 162	Ø: 76

FOR MATCHING SPIKE LIGHTS, SEE PAGE 338



Important: Some of our outdoor lighting products may not be suitable for use in coastal areas where salt corrosion is prevalent.



ALANA GU10 CURVED WALL LIGHTS

- Corrosion resistant
- Weather resistant
- Compact design

Construction: Polycarbonate & glass
Lamp type: GU10 LED (Single: 1 x 5W max. / Twin: 2 x 5W max,)

MADE FROM POLYCARBONATE



230V 50Hz | IP65 | LAMP DEPENDENT | LAMP NOT INCLUDED | 3 YEAR WARRANTY

Code	Model	Finish	Dimensions (mm)
ALC1BK	Single	Matt Black	H: 92 W: 68 P: 80
ALC2BK	Up/Down	Matt Black	H: 150 W: 68 P: 92

ALANA GU10 SQUARE WALL LIGHTS

- Corrosion resistant
- Weather resistant

Construction: Polycarbonate & glass
Lamp type: GU10 LED 5W max.

MADE FROM POLYCARBONATE



230V 50Hz | IP65 | LAMP DEPENDENT | LAMP NOT INCLUDED | 3 YEAR WARRANTY

Code	Model	Finish	Dimensions (mm)
ALS1BK	Single	Matt Black	H: 92 W: 68 P: 80
ALS2BK	Up/Down	Matt Black	H: 150 W: 68 P: 92

EAMON GU10 SINGLE WALL LIGHT

- Corrosion resistant
- Weather resistant
- Compact design

Construction: Polycarbonate
Lamp type: GU10 LED 5W max.

230V 50Hz | IP54 | LAMP DEPENDENT | LAMP NOT INCLUDED | 3 YEAR WARRANTY



MADE FROM POLYCARBONATE

Code	Finish	Dimensions (mm)	Base (mm)
EA1A	Anthracite	H: 125 Ø: 60 P: 88	Ø: 80
EA1BB	Brushed Brass	H: 125 Ø: 60 P: 88	Ø: 80
EA1BK	Black	H: 125 Ø: 60 P: 88	Ø: 80
EA1W	White	H: 125 Ø: 60 P: 88	Ø: 80

EAMON GU10 UP / DOWN WALL LIGHT

- Corrosion resistant
- Weather resistant
- Compact design

Construction: Polycarbonate
Lamp type: GU10 LED (Single: 1 x 5W max. / Twin: 2 x 5W max,)

230V 50Hz | IP54 | LAMP DEPENDENT | LAMP NOT INCLUDED | 3 YEAR WARRANTY



MADE FROM POLYCARBONATE

Code	Finish	Dimensions (mm)	Base (mm)
EA2A	Anthracite	H: 170 Ø: 60 P: 88	Ø: 80
EA2BB	Brushed Brass	H: 170 Ø: 60 P: 88	Ø: 80
EA2BK	Black	H: 170 Ø: 60 P: 88	Ø: 80
EA2W	White	H: 170 Ø: 60 P: 88	Ø: 80

FOR LAMPS, SEE PAGES 444-445





EAMON GU10 WALL LIGHT WITH PIR SENSOR

- Corrosion resistant
- PIR sensor with adjustable detection range, hold time and lux

Construction: Polycarbonate
Lamp type: GU10 LED (Single: 1 x 5W max. / Twin: 2 x 5W max,)
Sensor detection: 110°
Sensor duration: 10 sec - 5 min

230V 50Hz | IP44 | LAMP NOT INCLUDED | 3 YEAR WARRANTY

MADE FROM POLYCARBONATE



Code	Model	Finish	Dimensions (mm)	Base (mm)
EAPIR1BK	Single	Black	H: 160 Ø: 60 P: 100	H: 160 W: 74
EAPIR2BK	Up/Down	Black	H: 225 Ø: 60 P: 100	H: 160 W: 74

THE POLYCARBONATE OUTDOOR LIGHTING COLLECTION

ROBUST, CORROSION RESISTANT, AND LOW MAINTENANCE



Alana Wall Lights



Toro Coach Lanterns



TORO LED CCT ADJUSTABLE COACH LANTERN

- Corrosion resistant
- Adjustable CCT (3000K/ 4000K)
- Contemporary design

Construction: Polycarbonate
Driver: Integral
Lamp type: SMD LED





Code	Wattage	Model	Finish	CCT	Lumens	Dimensions (mm)
TOROUP	8W	Up	Black	3000/4000K	350/375lm	H: 220 W: 164 P: 190
TORODO	8W	Down	Black	3000/4000K	460/490lm	H: 220 W: 164 P: 190


Eamon Wall Lights


Eamon Spike Lights


LED Wall Pack


LED Bollard

EXTERIOR LED LANTERNS

- Durable, corrosion resilient construction
- Low-maintenance, long-life, and energy efficient
- Sensor detection angle 90° with manual override (PIR models)

Construction: Polycarbonate
Driver: Integral
Lamp type: LED





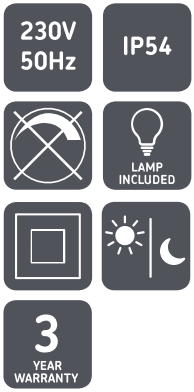

Code	Wattage	Model	Finish	CCT	Lumens	Dimensions (mm)	Base (mm)
LANT1	8W	Standard	Black	4000K	555lm	H: 375 W: 177 P: 230	Ø: 97
LANT1W	8W	Standard	White	4000K	555lm	H: 375 W: 177 P: 230	Ø: 97
LANT2	8W	With PIR	Black	4000K	555lm	H: 375 W: 177 P: 230	Ø: 97
LANT2W	8W	With PIR	White	4000K	555lm	H: 375 W: 177 P: 230	Ø: 97
LANT1BKP	8W	Photocell Sensor	Black	4000K	555lm	H: 375 W: 177 P: 230	Ø: 97
LANT1WP	8W	Photocell Sensor	White	4000K	555lm	H: 375 W: 177 P: 230	Ø: 97

EXTERIOR LED HALF-LANTERNS

- Durable, corrosion resilient construction
- Low-maintenance, long-life, and energy efficient
- Sensor detection angle 90° with manual override (PIR models)

Construction: Polycarbonate
Driver: Integral
Lamp type: LED





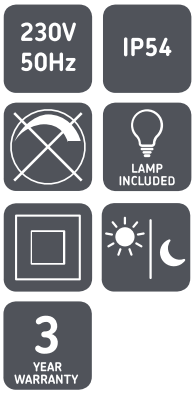

Code	Wattage	Model	Finish	CCT	Lumens	Dimensions (mm)
LANT3	8W	Standard	Black	4000K	440lm	H: 362 W: 175 P:99
LANT3W	8W	Standard	White	4000K	440lm	H: 362 W: 175 P:99
LANT4	8W	With PIR	Black	4000K	440lm	H: 362 W: 175 P:99
LANT4W	8W	With PIR	White	4000K	440lm	H: 362 W: 175 P:99
LANT3BKP	8W	Photocell Sensor	Black	4000K	440lm	H: 362 W: 175 P:99
LANT3WP	8W	Photocell Sensor	White	4000K	440lm	H: 362 W: 175 P:99

Important: Some of our outdoor lighting products may not be suitable for use in coastal areas where salt corrosion is prevalent.



STAINLESS STEEL LANTERN

- Stainless steel with clear glass
- Powder-coated finish
- LED compatible

Construction: 304 Stainless steel
Driver: Not required
Lamp type: E27 (40W max.)





Code	Finish	Dimensions (mm)	Base (mm)
LANTBK	Anthracite	H: 200 W: 120 P: 150	H: 100 W:78
LANTSS	Brushed Chrome	H: 200 W: 120 P: 150	H: 100 W:78

FILAMENT LAMPS AVAILABLE ON PAGE 446



Important: Some of our outdoor lighting products may not be suitable for use in coastal areas where salt corrosion is prevalent.

LED GUIDE LIGHTS

- Suitable for both indoor and outdoor applications
- Low maintenance
- Surface mounted for directional, focused, soft lighting

Construction: Aluminium
Driver: Integral
Lamp type: LED







Code	Wattage	Model	Finish	CCT	Lumens	Dimensions (mm)
RWL2A	2W	Standard	Anthracite	3500K	105lm	H: 140 W: 100 P: 32
RWL5A	5W	Standard	Anthracite	3500K	230lm	H: 70 W: 200 P: 33

LED GUIDE / STAIR / WALL LIGHTS

Construction: Die-cast aluminium
Driver: Integral
Lamp type: LED







Code	Wattage	Model	Finish	CCT	Lumens	Dimensions (mm)	Cut-out (mm)
NH020W	1W	Round	Matt White	6000K	45lm	H: 80 W: 80	Ø: 75 D: 50
NH019W	1W	Square	Matt White	6000K	45lm	H: 80 W: 80	Ø: 75 D: 50

Important: Some of our outdoor lighting products may not be suitable for use in coastal areas where salt corrosion is prevalent.

ROUND LED WALL / GUIDE LIGHTS

Construction: Aluminium
Driver: Integral
Lamp type: LED





Code	Wattage	Model	Finish	CCT	Lumens	Dimensions (mm)
LWR2G	3W	Round	Grey	3500K	160lm	Ø: 115 P: 28
LWR4G	5W	Round	Grey	3500K	230lm	Ø: 220 P: 28

SQUARE LED WALL / GUIDE LIGHTS

Construction: Aluminium
Driver: Integral
Lamp type: LED





Code	Wattage	Model	Finish	CCT	Lumens	Dimensions (mm)
LWS2G	3W	Square	Grey	3500K	160lm	H: 105 W: 105 P: 28
LWS4G	5W	Square	Grey	3500K	230lm	H: 200 W: 200 P: 28

Important: Some of our outdoor lighting products may not be suitable for use in coastal areas where salt corrosion is prevalent.



ADJUSTABLE UP DOWN WALL LIGHTS

- Adjustable beam angle, from 0° to 100°
- Independently adjustable lighting effect

Construction: Die-cast aluminium
Driver: Integral
Lamp type: SMD LED



230V 50Hz | IP65 | LAMP INCLUDED | 3 YEAR WARRANTY

Code	Wattage	Finish	CCT	Lumens	Dimensions (mm)
WAD12AA	2 x 6W	Anthracite	3000K	2 x 300lm	H: 125 W: 100 P: 100
WAD12ABK	2 x 6W	Matt Black	3000K	2 x 300lm	H: 125 W: 100 P: 100





Important: Some of our outdoor lighting products may not be suitable for use in coastal areas where salt corrosion is prevalent.



SURFACE MOUNT LED BRICKLIGHTS WITH ADJUSTABLE CCT

- Robust, polycarbonate construction, ideal for outdoor path and walkway lighting. Slim profile, surface mount installation can avoid additional cut-out while achieving similar bricklight look and feel
- Colour temperature adjustable (3000K or 4000K)
- Supplied with 3 x accessories (grill, louvre, shade)
- Kit available to transform fitting to retrofit, recessed bricklight (not included)

Construction: Polycarbonate
Driver: Integral
Lamp type: LED



Code	Wattage	Finish	CCT	Lumens	Dimensions (mm)
BL5BK	5W	Black	3000/4000K	495/530lm	H: 100 W: 235 P: 32
BL5G	5W	Grey	3000/4000K	495/530lm	H: 100 W: 235 P: 32
BL5BLBK	5W	Black	Blue	-	H: 100 W: 235 P: 32
BL5BLG	5W	Grey	Blue	-	H: 100 W: 235 P: 32

RETROFIT KITS

- Back box accessory kit to convert BL5xx fitting to a bricklight, enabling retrofitting or replace existing installations



Code	Model	Dimensions (mm)	Cut-out (mm)
BLKITBK	Retrofit Kit - Black	H: 100 W: 235 P: 14	L: 197 H: 70 D: 56
BLKITG	Retrofit Kit - Grey	H: 100 W: 235 P: 14	L: 197 H: 70 D: 56

LED BRICKLIGHT

- Supplied complete with 2 fascia plates - plain and louvre/grille

Construction: Aluminium
Driver: Integral
Lamp type: LED







Code	Wattage	Finish	Colour	CCT	Lumens	Dimensions (mm)	Cut-out (mm)
BLED5BB	5W	Black	Blue	-	-	H: 101 W: 235	H: 86 W: 226 D: 70
BLED5BW	5W	Black	Warm White	3500K	110lm	H: 101 W: 235	H: 86 W: 226 D: 70
BLED5SB	5W	Brushed Steel	Blue	-	-	H: 101 W: 235	H: 86 W: 226 D: 70
BLED5SW	5W	Brushed Steel	Warm White	3500K	110lm	H: 101 W: 235	H: 86 W: 226 D: 70

E27 BRICKLIGHT

- Supplied complete with 2 fascia plates - plain and louvre/grille

Construction: Die-cast aluminium
Driver: Not required
Lamp type: E27 (40W max.)







Code	Finish	Dimensions (mm)	Cut-out (mm)
BL01BK	Black	H: 100 W: 235	H: 88 W: 228 D: 90

E27 DOME BULKHEADS

Construction: Aluminium & glass
Lamp type: E27 (60W Max.)

Code	Finish	Dimensions (mm)
TP0V60B	Black	H: 210 W: 100 P: 110





Important: Some of our outdoor lighting products may not be suitable for use in coastal areas where salt corrosion is prevalent.

WATTAGE AND CCT ADJUSTABLE LED WALL PACK WITH PHOTOCELL SENSOR

- Complete with Photocell sensor
- 2 x Wattage; 10W / 15W
- 3 x CCT; 3000K / 4000K / 6500K
- High lumen efficiency
- Robust polycarbonate construction, body and diffuser

Construction: Polycarbonate
Driver: Integral
Lamp type: LED



MADE FROM POLYCARBONATE



Code	Wattage	Model	CCT	Lumens	Dimensions (mm)
WPCWA	10/15W	Standard with Photocell Sensor	3000/4000/6500K	Up to 1950lm	H: 217 W: 147 P: 78
WPCWAEM	10/15W	Emergency with Photocell Sensor	3000/4000/6500K	Up to 1950lm	H: 217 W: 147 P: 78

LED CCT ADJUSTABLE WALL LIGHT

- Corrosion resistant
- Weather resistant
- Low maintenance
- CCT adjustable - 3000K, 4000K or 6500K

Construction: ABS & polycarbonate
Driver: Integral
Lamp type: SMD LED
Beam angle: 105°



MADE FROM POLYCARBONATE



Code	Wattage	CCT	Lumens	Dimensions (mm)
WP21CCT	21W	3000/4000/6500K	Up to 1200lm	H: 170 W: 320 P: 136



NEW

WATTAGE AND CCT ADJUSTABLE LED WALL PACK WITH PHOTOCELL

- Quad Wattage switchable
- CCT adjustable - 3000K, 4000K or 6000K
- Asymmetric lens
- Complete with photocell sensor
- Side and rear cable entry
- Corrosion and weather resistant

Construction: ABS & polycarbonate
Driver: Integral
Lamp type: SMD LED
Beam angle: 105°



MADE FROM POLYCARBONATE

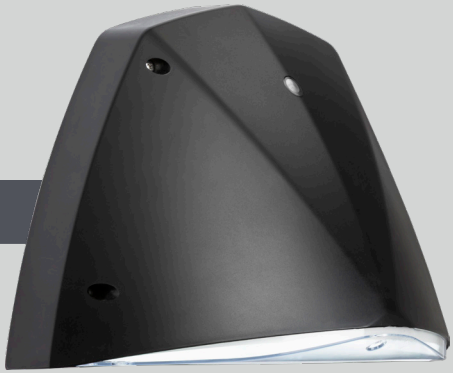

Code	Wattage	CCT	Lumens	Dimensions (mm)	
WPASCWA	14/17/21/24W	3000/4000/6000K	Up to 3095lm	H: 217 W: 309 P: 162	NEW



NOT JUST PRODUCTS
WE'RE BUILT TO BACK THE TRADE!

CUSTOMER SERVICE

- QUOTES WITHIN 1 HOUR
- SAME DAY COLLECTION FROM OUR WAREHOUSE
- 5PM CUT OFF NEXT DAY DELIVERY (MON-THU) (3PM ON FRIDAYS)
- DELIVER DIRECT TO YOUR CUSTOMERS WITH K-DIRECT
- 98%* STOCK AVAILABILITY
- DEDICATED AREA MANAGERS FOR PERSONALISED SUPPORT
- EXPERT TECHNICAL SUPPORT FOR PRODUCT SELECTION AND SPECIFICATION
- EFFICIENT RETURNS AND REPLACEMENTS WITH MINIMAL DISRUPTION

ONLINE FEATURES

- LIVE CHAT
- LIVE STOCK AVAILABILITY
- MANAGE AND TRACK ORDERS
- CSV PRODUCT DATA DOWNLOAD
- ADDITIONAL DISCOUNT FOR ORDERING ONLINE
- DOWNLOADABLE DATASHEETS AND INSTALLATION GUIDES
- MOBILE-FRIENDLY PLATFORM FOR ORDERING ON THE GO
- INSTANT ACCESS TO INVOICES AND ACCOUNT DOCUMENTS ONLINE



LED POLYCARBONATE BOLLARD WITH ADJUSTABLE CCT

- Weather-resistant
- CCT adjustable (3000K/ 4000K/ 5700K)
- Supplied with mounting kit

Construction: Polycarbonate
Driver: Included
Lamp type: SMD LED
Beam angle: 360°





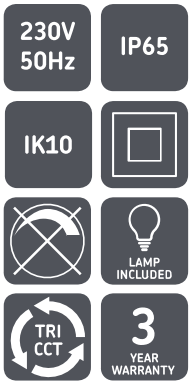

MADE FROM POLYCARBONATE

Code	Wattage	Model	Finish	CCT	Lumens	Dimensions (mm)
BLP10CCT	10W	Bollard	Black	3000/4000/5700K	655/750/700lm	H: 782 W: 174 D: 174

THE POLYCARBONATE OUTDOOR LIGHTING COLLECTION

ROBUST, CORROSION RESISTANT, AND LOW MAINTENANCE



Eamon Spike Lights



LED Wall Pack



Alana Wall Lights



GU10 BOLLARDS

Construction: 304 Stainless steel & polycarbonate
Lamp type: GU10 LED (max. 35W)
Beam angle: 360°

230V 50Hz | IP54 | LAMP DEPENDENT | LAMP NOT INCLUDED | 2 YEAR WARRANTY





GDLMK23



GDLSPIKE2





Code	Model	Finish	Dimensions (mm)
GDL2	GU10 Bollard	Anthracite	H: 650 Ø: 102
GDL3	GU10 Bollard	Anthracite	H: 1100 Ø: 102

GU10 BOLLARDS ACCESSORIES

Code	Model	Dimensions (mm)
GDLMK23	Mounting Kit for GDL2 and GDL3	H: 155 Ø: 135
GDLSPIKE2	Ground Spike for GDL2	H: 400 Ø: 87

Important: Some of our outdoor lighting products may not be suitable for use in coastal areas where salt corrosion is prevalent.

CRAFTED FOR ENDURING STRENGTH

Our bollard lights are designed to brave heavy foot traffic, unforgiving weather, and the unfaltering march of time. Perfectly suited for illuminating car parks and bustling commercial areas, our collection of commercial bollards seamlessly merges unwavering durability, energy efficiency, and superior lighting to elevate safety and aesthetics in outdoor environments.



LED STAINLESS STEEL PROFESSIONAL BOLLARD

- Stainless steel housing
- Curved inverted funnel reflector with clear lens
- 360° all-round light output
- High efficiency SMD LED
- Supplied with anchor bolt mounting kit
- Comes with 1m outdoor cable as standard

Construction: 304 Stainless steel
Driver: Included
Lamp type: SMD LED
Beam angle: 360°

Code	Wattage	Finish	CCT	Lumens	Dimensions (mm)
CBL15SS	15W	Stainless Steel	3000K	810lm	H: 950 Ø: 160

Important: Some of our outdoor lighting products may not be suitable for use in coastal areas where salt corrosion is prevalent.

Knightsbridge bollards are engineered with thick, high-quality steel and fortified with an IP65 rating, along with IK07 / IK08 ratings. Explore our array of commercial bollards, and choose between a contemporary, sleek appearance, or a more timeless design. With our bollard lights, you have the freedom to tailor your outdoor lighting to precisely match your unique requirements.



PROFESSIONAL STYLE BOLLARDS

- Die-cast aluminium housing with hard wearing powder-coated finish
- 360° all-round light output
- High efficiency SMD LED
- Supplied with anchor bolt mounting kit
- Comes with 1m outdoor cable as standard

Construction: Aluminium & stainless steel
Driver: Included
Lamp type: SMD LED
Beam angle: 360°

Code	Wattage	Finish	CCT	Lumens	Dimensions (mm)
CBL22BK	22W	Matt Black	3000K	370lm	H: 1000 Ø: 160

Important: Some of our outdoor lighting products may not be suitable for use in coastal areas where salt corrosion is prevalent.











OUTDOOR LIGHTING

SPIKE LIGHTS

Perfect for illuminating garden walkways, flower beds, water features, and more. With picturesque results, these are an Instagram favourite!

GU10 Spike Lights	336 - 338
LED Spike lights	339

GROUND SPIKE LIGHT

- Supplied with wall mount bracket and spike
- Pre-wired with 2m outdoor cable

Construction: Die-cast aluminium
Spike: Polycarbonate
Lamp type: GU10 LED





230V 50Hz | IP65 | LAMP DEPENDENT | LAMP NOT INCLUDED | 1 YEAR WARRANTY

Code	Finish	Dimensions (mm)	Spike Length (mm)
GUSPBK	Black	H: 326 Ø: 98	170

BLACK SPIKE LIGHT

- Supplied with wall mount bracket and spike
- Pre-wired with 1.5m outdoor cable

Construction: Die-cast Aluminium
Lamp type: GU10 LED





230V 50Hz | IP65 | LAMP DEPENDENT | LAMP NOT INCLUDED | 1 YEAR WARRANTY

Code	Finish	Dimensions (mm)	Spike Length (mm)
SPIKEGUBK	Black	H: 330 Ø: 65	173

EAMON GU10 SPIKE LIGHT

- Corrosion resistant
- Pre-wired with 1m outdoor cable

Construction: Polycarbonate
Max Wattage: 5W



230V 50Hz | IP65 | LAMP DEPENDENT | LAMP NOT INCLUDED | 3 YEAR WARRANTY

MADE FROM POLYCARBONATE

Code	Finish	Dimensions (mm)	Spike Length (mm)
EASPK1A	Anthracite	H: 110 Ø: 60 P: 163	162
EASPK1BB	Brushed Brass	H: 110 Ø: 60 P: 163	162
EASPK1BK	Black	H: 110 Ø: 60 P: 163	162
EASPK1W	White	H: 110 Ø: 60 P: 163	162



GU10 ROUND WALL/SPIKE LIGHT

- Supplied with wall mount bracket and spike
- Pre-wired with 2m outdoor cable

Construction: Die-cast aluminium & glass
Lamp type: GU10 LED







Code	Model	Dimensions (mm)	Spike Length (mm)
GUSPIKER	Round	H: 342 Ø: 72	172

GU10 SQUARE WALL/SPIKE LIGHT

- Supplied with wall mount bracket and spike
- Pre-wired with 2m outdoor cable

Construction: Die-cast aluminium & glass
Lamp type: GU10 LED







Code	Model	Dimensions (mm)	Spike Length (mm)
GUSPIKES	Square	H: 327 W: 72	172

Important: Some of our outdoor lighting products may not be suitable for use in coastal areas where salt corrosion is prevalent.



SPIKE LIGHTS

- Pre-wired with 3m outdoor cable

Construction: 304 Stainless steel (**GU10SPIKE**)
Die-cast aluminium (**GU10SPIKEBK**)
Lamp type: GU10 LED





230V 50Hz | IP65 | LAMP DEPENDENT | LAMP NOT INCLUDED | 1 YEAR WARRANTY

Code	Finish	Dimensions (mm)	Spike Length (mm)
GU10SPIKE	Stainless Steel	H: 250 Ø: 62.5	120
GU10SPIKEBK	Black	H: 250 Ø: 63.5	120

LIGHT GAUGE SPIKE LIGHT

- Pre-wired with 2m outdoor cable

Construction: 304 Stainless steel
Lamp type: GU10 LED





230V 50Hz | IP65 | LAMP DEPENDENT | LAMP NOT INCLUDED | 1 YEAR WARRANTY

Code	Finish	Dimensions (mm)	Spike Length (mm)
GU10SPIKEL	Stainless Steel	H: 250 Ø: 60	120

EXTENSION SPIKES

Code	Construction	Height (mm)
SPIKEXT1	Black	170
EXT2	Stainless Steel	604
EXT3	Black	604



FOR LAMPS, SEE PAGES 444-445



Important: Some of our outdoor lighting products may not be suitable for use in coastal areas where salt corrosion is prevalent.



NEW

LED POLYCARBONATE SPIKE LIGHT

- Corrosion resistant
- Prewired with 1m outdoor cable

Construction: ABS & Polycarbonate
Lamp type: CoB LED





230V 50Hz | IP65 | LAMP INCLUDED | 3 YEAR WARRANTY

MADE FROM POLYCARBONATE

Code	Wattage	Finish	CCT	Lumens	Dimensions (mm)	Spike Length (mm)	
SPIKE4PC	4W	Black	3000K	450lm	H: 239 Ø: 90	239	NEW

LED BLACK SPIKE LIGHT

- Supplied with wall mount bracket and spike
- Pre-wired with 3m outdoor cable

Construction: Die-cast aluminium
Lamp type: CoB LED





230V 50Hz | IP65 | LAMP INCLUDED | 3 YEAR WARRANTY

Code	Wattage	Finish	CCT	Lumens	Dimensions (mm)	Spike Length (mm)
SPIKE4BL	4W	Black	3000K	355lm	H: 305 Ø: 60	173





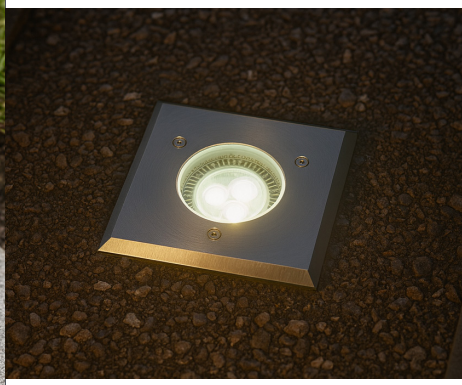





OUTDOOR LIGHTING

GROUND LIGHTS & DECK LIGHTING

Ideal for driveways, garden walkways, patios, and decking areas. These luminaries are small and discreet, but still provide effective guiding illumination

GROUND LIGHTS

GU10 Ground lights 344

LED Ground lights 345

LED Shallow Ground lights I Deck Lights 346

COB LED Ground lights 347

DECK LIGHTING

LED Interchangeable Wall / Ground lights 348

LED Deck Lights & Kits 349

Note: Some of our outdoor products may not be suitable for use in coastal areas where salt corrosion is prevalent

Knightsbridge

COMMITTED TO A BRIGHTER FUTURE

CARD PACKAGING 88% MADE FROM RECYCLED MATERIAL

PLASTIC PACKAGING 90% MADE FROM RECYCLED MATERIAL

ALL PACKAGING 100% MADE FROM RECYCLEABLE MATERIAL



FSC
www.fsc.org
FSC® N003051
The mark of responsible forestry

At Knightsbridge, we believe in looking after our customers and looking after our planet. This philosophy is important to us and is why we apply it to the way we package and present our products.

We are now working in conjunction with the FSC® moving towards 100% recyclable / 100% recycled packaging solutions. Look out for the FSC® label on our certified packaging.

This is our plan, this is our commitment to a brighter future.

FSC FORESTS FOR ALL FOREVER ™

ENVIRONMENTALLY APPROPRIATE
forest management ensures that the harvest of timber and non-timber products maintains the forest's biodiversity, productivity, and ecological processes.

SOCIALLY BENEFICIAL
forest management helps both local people and society at large to enjoy long term benefits and also provides strong incentives to local people to sustain the forest resources and adhere to long-term management plans.

ECONOMICALLY VIABLE
forest management means that forest operations are structured and managed so as to be sufficiently profitable, without generating financial profit at the expense of the forest resource, the ecosystem, or affected communities.

RECOMMENDED GROUND PREPARATION (IP65)

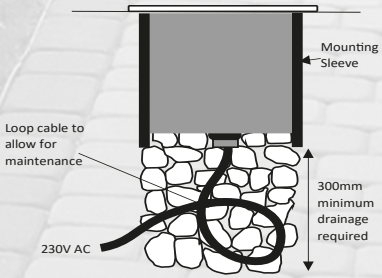

Ensure there is a minimum 300mm 'hole' below the fitting, fill with loose gravel or pea shingle

Test hole by filling with water which should drain away within 30 minutes

Leave cable loop in gravel to allow access and extraction of fitting

Final circuit connection

Use IP68 connection boxes which are gel filled if buried

Joint should be accessible for repair or maintenance

All outdoor circuits should be protected by either an RCD or RCBO

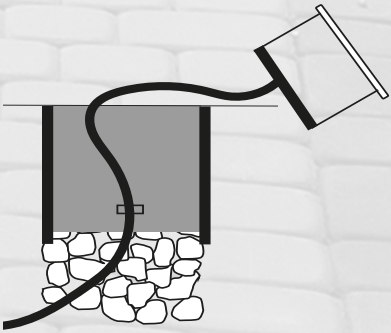

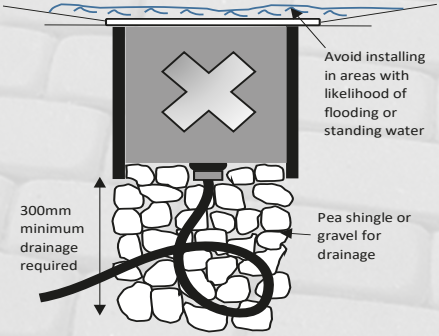

For areas with a low water table or likely to flood leaving 'standing water', IP65 fittings should be avoided.

Fittings with IP67 or IP68 ratings should be used in these installations

GU10 GROUND LIGHT

- 2 x 20mm compression glands at the base allowing loop-in-loop-out

Construction: 304 Stainless steel
Driver: Not required
Lamp type: GU10 LED





Code	Model	Bezel (mm)	Cut-out (mm)	Recessed Depth (mm)
WGULED	Round	Ø: 105	Ø: 92	D: 132
WSGULED	Square	L: 100 W: 100	Ø: 92	D: 132

230V 50Hz | IP67 | LAMP DEPENDENT | LAMP NOT INCLUDED | DRIVE OVER | 1 YEAR WARRANTY

316 STAINLESS STEEL GU10 GROUND LIGHT

Construction: 316 Stainless steel
Driver: Not required
Lamp type: GU10 LED



Code	Finish	Bezel (mm)	Cut-out (mm)	Recessed Depth (mm)
316WALK	316 Stainless Steel	Ø: 101	Ø: 80	D: 190

230V 50Hz | IP67 | LAMP DEPENDENT | LAMP NOT INCLUDED | DRIVE OVER | 1 YEAR WARRANTY

GROUND LIGHT WITH HALF LIP

Construction: 304 Stainless steel
Driver: Not required
Lamp type: GU10 LED



Code	Finish	Bezel (mm)	Cut-out (mm)	Recessed Depth (mm)
CAPWGU	Stainless Steel	Ø: 88	Ø: 65	D: 109

230V 50Hz | IP65 | LAMP DEPENDENT | LAMP NOT INCLUDED | DRIVE OVER | 1 YEAR WARRANTY



3W STAINLESS STEEL LED GROUND LIGHTS

- Ideal for driveways and decking, safe for indoor and outdoor use
- Pre-wired with 2m outdoor cable

Construction: 304 Stainless steel
Driver: Integral
Lamp type: LED



230V 50Hz | IP65 | LAMP INCLUDED | DRIVE OVER | 2 YEAR WARRANTY

Code	Wattage	Finish	CCT	Lumens	Bezel (mm)	Cut-out (mm)	Recessed Depth (mm)
LEDGL3W	3W	Stainless Steel	3000K	270lm	Ø: 92	Ø: 78	D: 94
LEDGL3D	3W	Stainless Steel	6000K	290lm	Ø: 92	Ø: 78	D: 94

1.5W STAINLESS STEEL LED GROUND LIGHTS

- Pre-wired with 1.5m outdoor cable

Construction: Stainless steel & aluminium
Driver: Integral
Lamp type: LED





230V 50Hz | IP65 | LAMP INCLUDED | DRIVE OVER | 3 YEAR WARRANTY

Code	Wattage	Finish	CCT	Lumens	Bezel (mm)	Cut-out (mm)	Sleeve (mm)	Recessed Depth (mm)
LEDM07B	1.5W	Stainless Steel	Blue	-	Ø: 62	Ø: 50	Ø: 60	D: 82.5
LEDM07W	1.5W	Stainless Steel	4000K	70lm	Ø: 62	Ø: 50	Ø: 60	D: 82.5

1.7W STAINLESS STEEL LED SHALLOW GROUND LIGHTS

- Pre-wired with 2.5m outdoor cable
- Supplied with polycarbonate housing
- Drive over max. 1000kg at 5mph
- Slim, shallow profile design, making it versatile for most installations

Construction: Stainless steel & aluminium
Driver: Integral
Lamp type: LED



230V 50Hz | IP65 | LAMP INCLUDED | DRIVE OVER | 3 YEAR WARRANTY



LEDM08B1



LEDM08W1



LEDM08WW1

Code	Wattage	Finish	CCT	Lumens	Bezel (mm)	Cut-out (mm)	Sleeve (mm)	Recessed Depth (mm)
LEDM08B1	1.7W	Stainless Steel	Blue	-	Ø: 110	Ø: 90	Ø: 97	D: 47
LEDM08W1	1.7W	Stainless Steel	4000K	90lm	Ø: 110	Ø: 90	Ø: 97	D: 47
LEDM08WW1	1.7W	Stainless Steel	3000K	95lm	Ø: 110	Ø: 90	Ø: 97	D: 47

1.7W LED WHITE GROUND / DECK LIGHT

- Pre-wired with 2.5m outdoor cable
- Supplied with polycarbonate housing
- Drive over max. 1000kg at 5mph
- Supplied with polycarbonate housing
- Slim, shallow profile design, making it versatile for most installations

Construction: Stainless steel & aluminium
Driver: Integral
Lamp type: LED

230V 50Hz | IP65 | LAMP INCLUDED | DRIVE OVER | 3 YEAR WARRANTY



LEDM09WW



LEDM09CW

Code	Wattage	Finish	CCT	Lumens	Bezel (mm)	Cut-out (mm)	Sleeve (mm)	Recessed Depth (mm)
LEDM09WW	1.7W	Stainless Steel	3000K	90lm	Ø: 80	Ø: 75	Ø: 77	D: 48
LEDM09CW	1.7W	Stainless Steel	4000K	90lm	Ø: 80	Ø: 75	Ø: 77	D: 48

LEDM08 & LEDM09 ARE SUPPLIED WITH PLASTIC HOUSING





STAINLESS STEEL COB LED GROUND LIGHTS

- Pre-wired with 2m outdoor cable

Construction: 304 Stainless steel
Driver: Integral
Lamp type: CoB LED







Code	Wattage	Finish	CCT	Bezel (mm)	Cut-out with Sleeve	Recessed Depth (mm)	Lumens
LDGL9	9W	Stainless Steel	3000K	Ø: 160	Ø: 144	D: 88	610lm





Code	Wattage	Finish	CCT	Bezel (mm)	Cut-out with Sleeve	Recessed Depth (mm)	Lumens
LDGL6	6W	Stainless Steel	3000K	Ø: 129	Ø: 114	D: 70	405lm





Code	Wattage	Finish	CCT	Bezel (mm)	Cut-out with Sleeve	Recessed Depth (mm)	Lumens
LDGL5	5W	Stainless Steel	3000K	Ø: 68	Ø: 60m	D: 80	240lm

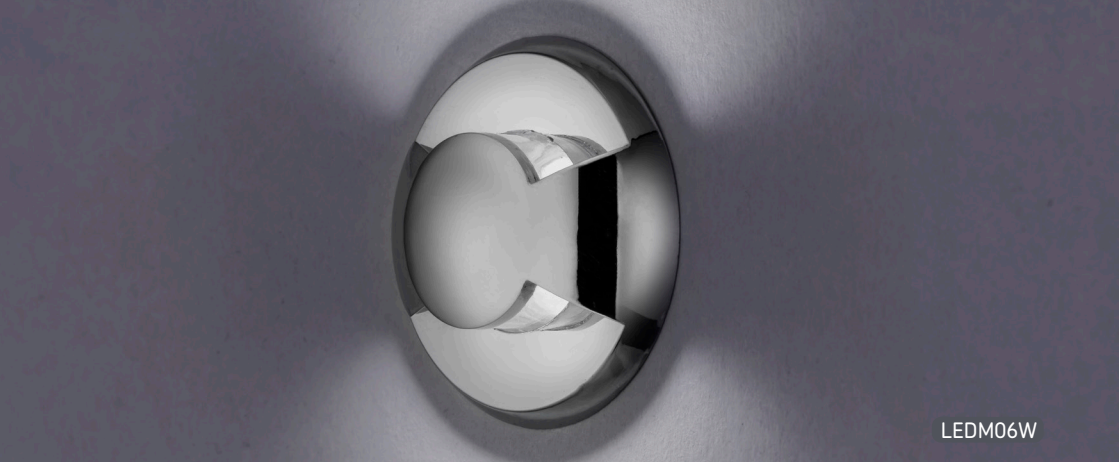

LED WALL MARKER / GROUND LIGHTS

- Supplied with 3 interchangeable chrome effect polycarbonate heads for directional light output
- Suitable for ground and wall installation
- Pre-wired with 2m cable

Construction: Stainless steel & polycarbonate
Driver: Integral
Lamp type: LED





230V 50Hz | IP65 | LAMP INCLUDED | 3 YEAR WARRANTY

Code	Wattage	Finish	CCT	Lumens	Recessed Depth (mm)	Overall Ø (mm)	Cut-out (mm)
LEDM06B	0.6W	Brushed Steel	Blue	-	48	38	32
LEDM06W	0.6W	Brushed Steel	6000K	50lm	48	38	32
LEDM06WW	0.6W	Brushed Steel	3000K	25lm	48	38	32





COMES WITH THREE INTERCHANGEABLE CHROME-EFFECT HEADS



1W LED DECKING LIGHTS

- Weight load: 500kg

Construction: 304 Stainless steel
Driver: Integral
Lamp type: LED





Code	Wattage	Finish	CCT	Lumens	Bezel (mm)	Cut-out with sleeve (mm)	Recessed Depth (mm)	Cut-out (mm)
HPLED1W	1W	Stainless Steel	5500K	85lm	Ø: 62	Ø: 60	D: 90	Ø: 40

2.2W STAINLESS STEEL LED DECKING KIT

- 10 x 0.2W LED
- Stainless steel bezels supplied as standard

Construction: Polycarbonate
Driver: Included
Lamp type: LED





Code	Wattage	Finish	CCT	Lumens	Bezel (mm)	Recessed Depth (mm)	Cut-out (mm)
KIT16WW	2.2W	Stainless Steel	3000K	105lm	Ø: 30	D: 27	Ø:25
KIT16W	2.2W	Stainless Steel	6000K	90lm	Ø:30	D: 27	Ø:25
KIT16B	2.2W	Stainless Steel	Blue	-	Ø:30	D: 27	Ø:25

LED DECKING LIGHTS (0.5W)

- 24V constant voltage
- Dimmable (driver dependent)

Construction: 304 Stainless steel
Driver: Required - see page 449 - 450
Lamp type: LED





Code	Wattage	Finish	CCT	Lumens	Bezel (mm)	Recessed Depth (mm)	Cut-out (mm)
4IPB	0.5W	Stainless Steel	Blue	-	Ø: 36	D: 59	Ø: 28
4IPW	0.5W	Stainless Steel	5000K	5lm	Ø: 36	D: 59	Ø: 28









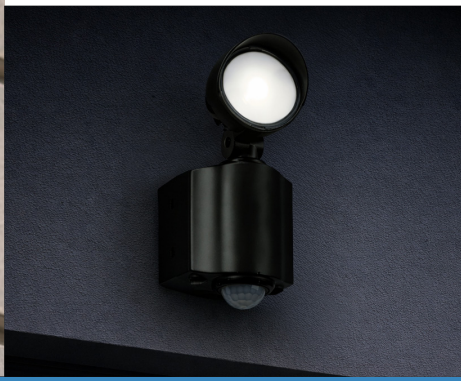

OUTDOOR LIGHTING

FLOODLIGHTS, SECURITY LIGHTING,

Floodlights provide an ultra-high lumen solution to any outdoor space - this range includes RGB models and CCT adjustable spotlights

IP65 Lightweight LED Floodlights	352
IP65 High Power LED Floodlights	353
IP66 High Lumen Commercial Floodlights & Accessories	354 - 355
IP65 CCT Adjustable Security Floodlights with PIR	356
IP55 Security Spotlights with PIR	357
RGB LED Floodlights	358
IP65 Twin Spot Security Floodlights	359

Note: Some of our outdoor products may not be suitable for use in coastal areas where salt corrosion is prevalent

LIGHTWEIGHT LED FLOODLIGHTS

- This range of LED floodlights offers the user quality and versatility, with the ability to add either PIR or microwave sensors
- High lumen - produces in excess of 120lm/W
- Fast and easy install. Equipped with a fast fix connector allows for direct wiring removing the need for external or extra wiring.
- Low profile design

Construction: Die-cast aluminium
Driver: Integral
Lamp type: LED







Code	Wattage	Finish	CCT	Lumens	Dimensions (mm)
FLN10	10W	Black	4000K	1085lm	H: 104 W: 95 P: 28
FLN20	20W	Black	4000K	2240lm	H: 129 W: 135 P: 28
FLN30	30W	Black	4000K	3330lm	H: 142 W: 160 P: 28
FLN50	50W	Black	4000K	5430lm	H: 177 W: 200 P: 28



Easy-fix PIR and microwave accessories



Angled bracket for easy installation



Easy-install built-in connector

FLN FLOODLIGHT ACCESSORIES

Code	Model
FLNPIR	PIR Accessory
FLNMIC	Microwave Accessory







HIGH POWER LED FLOODLIGHTS

LED floodlights with high lumen output and instant ignition makes these luminaires ideal for security / high level illumination in commercial, retail, and industrial environments

- Internal terminal block on the rear allows for direct wiring
- Low maintenance with high output
- Fortified bracket and fastenings

Construction: Die-cast aluminium
Driver: Integral
Lamp type: LED





Code	Wattage	Finish	CCT	Lumens	Dimensions (mm)
FLPA150D	150W	Black	6000K	15000lm	H: 237 W: 360 D: 73







Internal terminal block for direct wiring

ILLUMINATE YOUR COMMERCIAL ENVIRONMENT WITH THE EXCEPTIONAL POWER AND EFFICIENCY OF KNIGHTSBRIDGE'S FLOODLIGHTS.





230V 50Hz | IP66 | IK08 | LAMP INCLUDED | CHLORINE RESISTANT | 5 YEAR WARRANTY

HIGH LUMEN COMMERCIAL FLOODLIGHT 4000K

- Suitable for chlorine environments
- L70B10 of 110,000 hours
- Up to 150lm/W
- Optional Symmetric/Asymmetric lenses available (sold separately)

Construction: Die-cast aluminium
Driver: Integral
Lamp type: SMD LED
Beam angle: 115°

Code	Wattage	Finish	CCT	Lumens	Dimensions (mm)
FLHL100	100W	Black	4000K	15,390lm	H: 241 W: 270 D: 60
FLHL200	200W	Black	4000K	30,950lm	H: 305 W: 341 D: 71

Perfect for elevating visibility and security, our FLHL floodlights are tailor-made for illuminating vast outdoor spaces, ensuring premises bask in brilliant, uniformed light. The range boasts an impressive IP66 and IK08 rating, safeguarding them against adverse weather and potential impacts. Thoughtfully engineered to endure, even in chlorine-rich surroundings, the FLHL range is suitable for diverse applications, from pool areas to industrial settings.

Boasting a robust design that prioritises both longevity and durability, our floodlights come with an array of accessories, making the FLHL range the top choice for illuminating sports arenas, commercial complexes, and industrial facilities.

ASYMMETRIC & SYMMETRIC LENS ACCESSORIES

- Simple installation
- Ideal for car park and sports field floodlighting
- Reduces light pollution

Construction: Polycarbonate



5 YEAR WARRANTY

Code	Model	Dimensions (mm)
FLHLAS100	100W 55x125° Asymmetric Lens Accessory	H: 121 W: 204
FLHLSM100	100W 60° Symmetric Lens Accessory	H: 121 W: 204
FLHLAS200	200W 55x125° Asymmetric Lens Accessory	H: 182 W: 274
FLHLSM200	200W 60° Symmetric Lens Accessory	H: 182 W: 274

POLE CLAMP ACCESSORY

- Suitable for the FLHL floodlights
- One bracket can be used to mount 2 floodlights*
- Ideal for retrofit installation*

Construction: Steel

5 YEAR WARRANTY





Pole not included

Code	Dimensions (mm)
FLHLPC200	W: 260 D: 50

* Check pole suitability

76MM POLE MOUNT ACCESSORY

- Suitable for the FLHL100 & FLHL200 floodlights
- Ideal for retrofit installation*

Construction: Steel



5 YEAR WARRANTY



Pole not included

Code	Dimensions (mm)
FLHLPM	Ø: 89 W: 266

* Check pole suitability



CCT SECURITY FLOODLIGHT WITH PIR SENSOR

- Wide operating voltage range 100-277Vac
- Adjustable 3000K, 4000K, 5500K CCTs
- Twin or triple head options available (20W & 30W)
- Manual override facility
- Adjustable sensitivity, time, and lux
- 90° PIR detection range
- 8m detection distance
- Easy fix wall mount and push fit assembly

Construction: Polycarbonate

Driver: Integral

Lamp type: LED

Beam angle: 70° (from each head)





Featuring user definable white light CCT Adjustable 3000/4000/5500K by means of a selection switch



350° lamp bracket rotation, 180° lamp head rotation, 270° lamp head tilt



PIR motion sensor with adjustable Sensitivity, Time and Lux levels.

Code	Wattage	Finish	CCT	Lumens	Dimensions (mm)	Base (mm)
SL20CCTB	20W	Black	3000/4000/5500K	1810lm	P: 173 W: 243	Ø: 107
SL30CCTW	30W	White	3000/4000/5500K	2960lm	P: 190 W: 222	Ø: 107



LED SECURITY SPOTLIGHTS WITH PIR

- Adjustable die-cast aluminium head and polycarbonate body
- Uses Cree X Lamp® LEDs; delivering long-lasting, energy-efficient performance
- Instant ignition
- Easy-fix mounting for simple installation
- Integral 180° PIR sensor with adjustable lux and time settings - 10m detection range (approx.)

Construction: Polycarbonate & Die-cast aluminium
Driver: Integral
Lamp type: CoB LED
Beam angle: 85°





Code	Wattage	Finish	CCT	Lumens	Dimensions (mm)	Base (mm)
FL8ABK	8W	Black	5000K	600lm	H: 176 W: 78 P: 107	H: 105 W 78
FL8AW	8W	White	5000K	600lm	H: 176 W: 78 P: 107	H: 105 W 78





Code	Wattage	Finish	CCT	Lumens	Dimensions (mm)	Base (mm)
FL16ABK	2 x 8W	Black	5000K	1300lm	H: 176 W: 141 P: 113	H: 105 W 141
FL16AW	2 x 8W	White	5000K	1300lm	H: 176 W: 141 P: 113	H: 105 W 141



RGB LED FLOODLIGHTS

- Colour changing LED floodlights
- Ultra slim design
- Die-cast aluminium construction
- Supplied complete with multi-function remote control
- Memory function, including after the power is cut
- Pre-wired with 1m cable

Construction: Die-cast aluminium
Driver: Integral
Lamp type: LED



230V 50Hz | IP65 | IK06 | LAMP INCLUDED | 3 YEAR WARRANTY

Code	Wattage	Finish	Colour	Dimensions (mm)
FLG20RGB	20W	Black	RGB	H: 180 W: 210 D: 30
FLG50RGB	50W	Black	RGB	H: 219 W: 249 D: 32



SUPPLIED WITH MULTI-FUNCTION REMOTE CONTROL





NEW

NESO TWIN SECURITY SPOTLIGHTS

- GU10 lamp holders, easily choose and replace bulbs to match your lighting preference
- Twin spotlight with individually adjustable heads
- PIR Manual override facility
- PIR Max. detection distance: 7m
- PIR detection angle: 90°
- Rotation: 300°
- 2 x GU10 lamps required, max. 35W

Construction: Die-cast aluminium



Code	Model	Wattage	Finish	Dimensions (mm)	Base (mm)	
NESGU	Standard	2x10W	Black	H: 105 W: 172 P: 134	W: 165 H: 75	NEW
NESGUPIR	PIR	2x10W	Black	H: 120 W: 172 D: 134	W: 165 H: 129	NEW











COMMERCIAL LIGHTING

BULKHEADS & WALL PACKS

These luminaires provide a high lumen output, long life and low running costs. Bulkheads can be wall or ceiling mounted, making them an efficient and versatile lighting option

BT EVO IP65 IK10 Adjustable Wattage and CCT LED Bulkheads	362 - 365
BT IP65 CCT Adjustable LED Bulkheads & Accessories	366 - 369
TENAX Composite Wattage and CCT Adjustable LED Bulkheads	370 - 373
SHERPA IK10 CCT Adjustable LED Bulkheads	374 - 375
LED Amenity Wall Packs	376
E27 and B22 Amenity Bulkheads	377
CCT Adjustable LED Wall Pack | Polycarbonate CCT Adjustable Wall Lights	378 - 379

Knightsbridge

BT EVO | LED BULKHEADS



PUSH-FIT TERMINALS

UV PROTECTION

BESA COMPATIBLE

20MM CONDUIT

EMERGENCY FUNCTION

CORRIDOR FUNCTION

SENSOR FUNCTION

DUSK / DAWN SENSOR

LITHIUM LiFePO4

IP65

IK10

3000K	9W
4000K	14W
5700K	18W

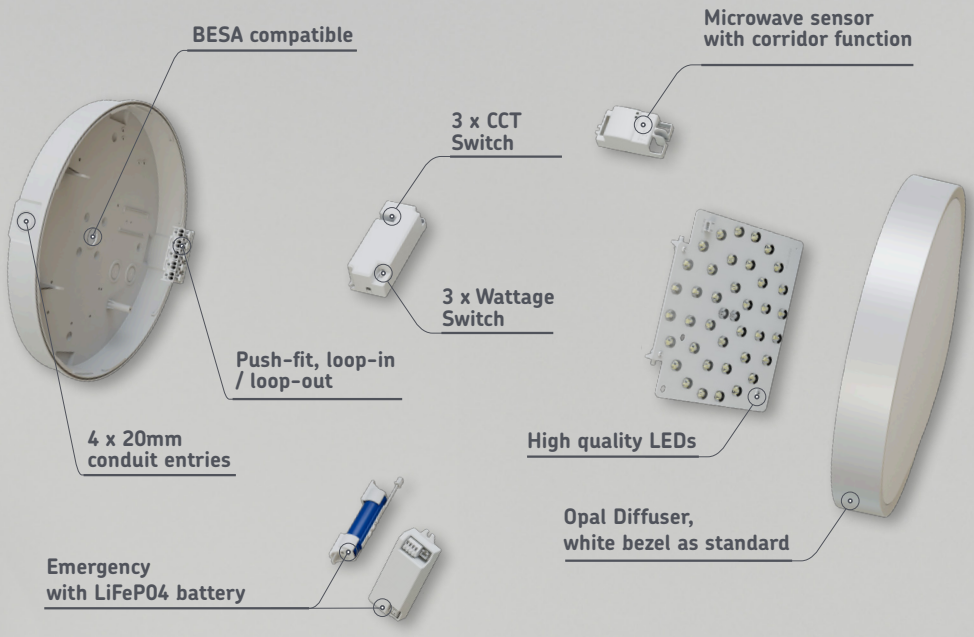

THE BEST JUST EVOLVED



PLUS ACCESSORIES



BT EVO IP65 IK10 ADJUSTABLE WATTAGE AND CCT LED BULKHEADS

- 3000K/ 4000K/5700K adjustable
- 9W/ 14W/ 18W adjustable
- UV-stabilised body and diffuser
- Push-fit terminals with loop-in-loop-out capabilities, hinged gear tray, twist lock diffuser and a clip-on bezel
- 20mm conduit entry points on four sides plus rear BESA mounting points
- Options available: standard, emergency, microwave sensor, emergency with a microwave sensor, corridor function, corridor function with emergency, daylight sensor, daylight sensor with emergency.
- Offered standard as white with optional bezels in Matt Black, Chrome, Eyelid Matt Black and Eyelid Grey.
- 9W - 930lm at 4000K
- 14W - 1,400lm at 4000K
- 18W - 1,750lm at 4000K

Construction: Polycarbonate & ABS
Driver: Integral
Lamp type: LED





Code	Wattage	Model	CCT	Lumens	Dimensions (mm)	
BTEV	9/14/18W	Standard	3000/4000/5700K	Up to 1750lm	Ø: 300 P: 65	
BTEVEM	9/14/18W	Emergency	3000/4000/5700K	Up to 1750lm	Ø: 300 P: 65	
BTEVCF	9/14/18W	Corridor Sensor	3000/4000/5700K	Up to 1750lm	Ø: 300 P: 65	
BTEVCFEM	9/14/18W	Emergency Corridor Sensor	3000/4000/5700K	Up to 1750lm	Ø: 300 P: 65	
BTEVP	9/14/18W	Daylight Sensor	3000/4000/5700K	Up to 1750lm	Ø: 300 P: 65	
BTEVPEM	9/14/18W	Emergency Daylight Sensor	3000/4000/5700K	Up to 1750lm	Ø: 300 P: 65	
BTEVMW	9/14/18W	Microwave Sensor	3000/4000/5700K	Up to 1750lm	Ø: 300 P: 65	
BTEVMWEM	9/14/18W	Emergency Microwave Sensor	3000/4000/5700K	Up to 1750lm	Ø: 300 P: 65	
BTEVDALI	14/16/18W	DALI control	3000/4000/5700K	Up to 2200lm	Ø: 300 P: 65	**NEW**
BTEVDALIEM	14/16/18W	DALI and DALI Emergency Control	3000/4000/5700K	Up to 2200lm	Ø: 300 P: 65	**NEW**



BT EV0 BEZELS

Construction: Polycarbonate

1 YEAR WARRANTY



Code	Model	Finish
BTEVBEZCH	Standard	Chrome
BTEVBEZEG	Eyelid	Grey
BTEVBEZMB	Standard	Matt Black
BTEVBEZEMB	Eyelid	Matt Black



EASY INSTALL

PUSH-FIT TERMINAL BLOCK
AND HINGED GEAR TRAY FOR
HASSLE-FREE WIRING

THE ORIGINAL BT BULKHEADS



MULTI-FUNCTIONAL

9W

EMERGENCY FUNCTION | SENSOR FUNCTION

3000K | 4000K | 5700K

14W

CORRIDOR FUNCTION | EMERGENCY FUNCTION | SENSOR FUNCTION

3000K | 4000K | 5700K

20W

CORRIDOR FUNCTION | EMERGENCY FUNCTION | SENSOR FUNCTION

3000K | 4000K | 5700K

3 SIZES, 3 COLOUR TEMPERATURES

ENDLESS APPLICATIONS

CCT ADJUSTABLE LED BULKHEAD

This versatile IP65 LED bulkhead boasts LED colour changing technology enabling the installer / end-user to adjust the colour temperature via a switch on the gear tray.

- Time saving and user-friendly installation via hinged gear tray and push-fit terminal block
- Specialised polycarbonate diffuser ensures high lumen levels with smooth uninterrupted light
- Suitable for domestic and commercial applications, wall or ceiling mounted
- A range of easy-fit coloured trims and eyelid options make this an extremely adaptable and time-saving solution

CHOICE OF TRIM FINISHES, WITH SIMPLE PUSH-FIT DESIGN



BT9 9W CCT ADJUSTABLE LED BULKHEAD



Code	Wattage	Model	CCT	Lumen	Dimensions (mm)
BT9ACT	9W	Standard	3000/4000/5700K	Up to 780lm	Ø: 256 P: 74
BT9ACTEM	9W	Emergency	3000/4000/5700K	Up to 780lm	Ø: 256 P: 74
BT9ACTS	9W	Sensor	3000/4000/5700K	Up to 780lm	Ø: 256 P: 74
BT9ACTEMS	9W	Emergency and Sensor	3000/4000/5700K	Up to 780lm	Ø: 256 P: 74

BT9 BEZELS

Code	Finish
BT9CHR	Chrome
BT9B	Black
BT9G	Grey
BT9MBR	Brass
BT9SLV	Matt Silver

BT9 EYELIDS

Code	Finish
BT9EB	Black
BT9EG	Grey
BT9ES	Silver



BT14 14W CCT ADJUSTABLE LED BULKHEAD

- CCT adjustable
- Corridor function



Code	Wattage	Model	CCT	Lumen	Dimensions (mm)
BT14ACT	14W	Standard	3000/4000/5700K	Up to 1210lm	Ø: 315 P: 74
BT14ACTEM	14W	Emergency	3000/4000/5700K	Up to 1210lm	Ø: 315 P: 74
BT14ACTS	14W	Sensor	3000/4000/5700K	Up to 1210lm	Ø: 315 P: 74
BT14ACTEMS	14W	Emergency and Sensor	3000/4000/5700K	Up to 1210lm	Ø: 315 P: 74
BT14CTA	14W	Sensor (Corridor Function)	3000/4000/5700K	Up to 1130lm	Ø: 315 P: 74
BT14ACTDALI	14W	DALI Control	3000/4000/5700K	Up to 1375lm	Ø: 315 P: 74
BT14ACTDALIEM	14W	DALI Control + Emergency (Manual)	3000/4000/5700K	Up to 1375lm	Ø: 315 P: 74

BT14 BEZELS

Code	Finish
BT14CHR	Chrome
BT14B	Black
BT14G	Grey
BT14MBR	Brass
BT14SLV	Matt Silver

BT14 EYELIDS

Code	Finish
BT14EB	Black
BT14EG	Grey
BT14ES	Silver



BT20 20W CCT ADJUSTABLE LED BULKHEAD



Code	Wattage	Model	CCT	Lumen	Dimensions (mm)
BT20ACT	20W	Standard	3000/4000/5700K	Up to 1855lm	Ø: 380 P: 81
BT20ACTA	20W	Sensor (Corridor Function)	3000/4000/5700K	Up to 1885lm	Ø: 380 P: 81
BT20ACTEM	20W	Emergency	3000/4000/5700K	Up to 1855lm	Ø: 380 P: 81
BT20ACTS	20W	Sensor	3000/4000/5700K	Up to 1855lm	Ø: 380 P: 81
BT20ACTEMS	20W	Emergency and Sensor	3000/4000/5700K	Up to 1885lm	Ø: 380 P: 81
BT20ACTEMA	20W	Emergency and Sensor (Corridor Function)	3000/4000/5700K	Up to 1885lm	Ø: 380 P: 81
BT20ACTDALI	20W	DALI Control	3000/4000/5700K	Up to 2010lm	Ø: 380 P: 81
BT20ACTDALIEM	20W	DALI Control + Emergency (Manual)	3000/4000/5700K	Up to 2010lm	Ø: 380 P: 81

BT20 BEZELS

Code	Finish
BT20CHR	Chrome
BT20B	Black
BT20G	Grey
BT20MBR	Brass
BT20SLV	Matt Silver



BPLED LED GEAR TRAYS

- Ideal replacement for traditional circular 2D 28W bulkheads
- Available with emergency function
- High SMD LED output and energy efficient

Construction: CEM-1
Driver: Included
Lamp type: SMD LED





Code	Wattage	Model	Colour	CCT	Lumens	Dimensions (mm)
BPLED	14W	Standard	Cool White	4000K	1480lm	Ø: 246
BPLEDEM	14W	Emergency	Cool White	4000K	1480lm	Ø: 246

TENAX

COMPOSITE BULKHEADS



UP TO **120** lm/w

IP65

IP66

IK10

5 YEAR WARRANTY

BOUNDLESS POTENTIAL,

SELECT **SHAPE AND COLOUR**

SELECT **LED GEAR TRAY**

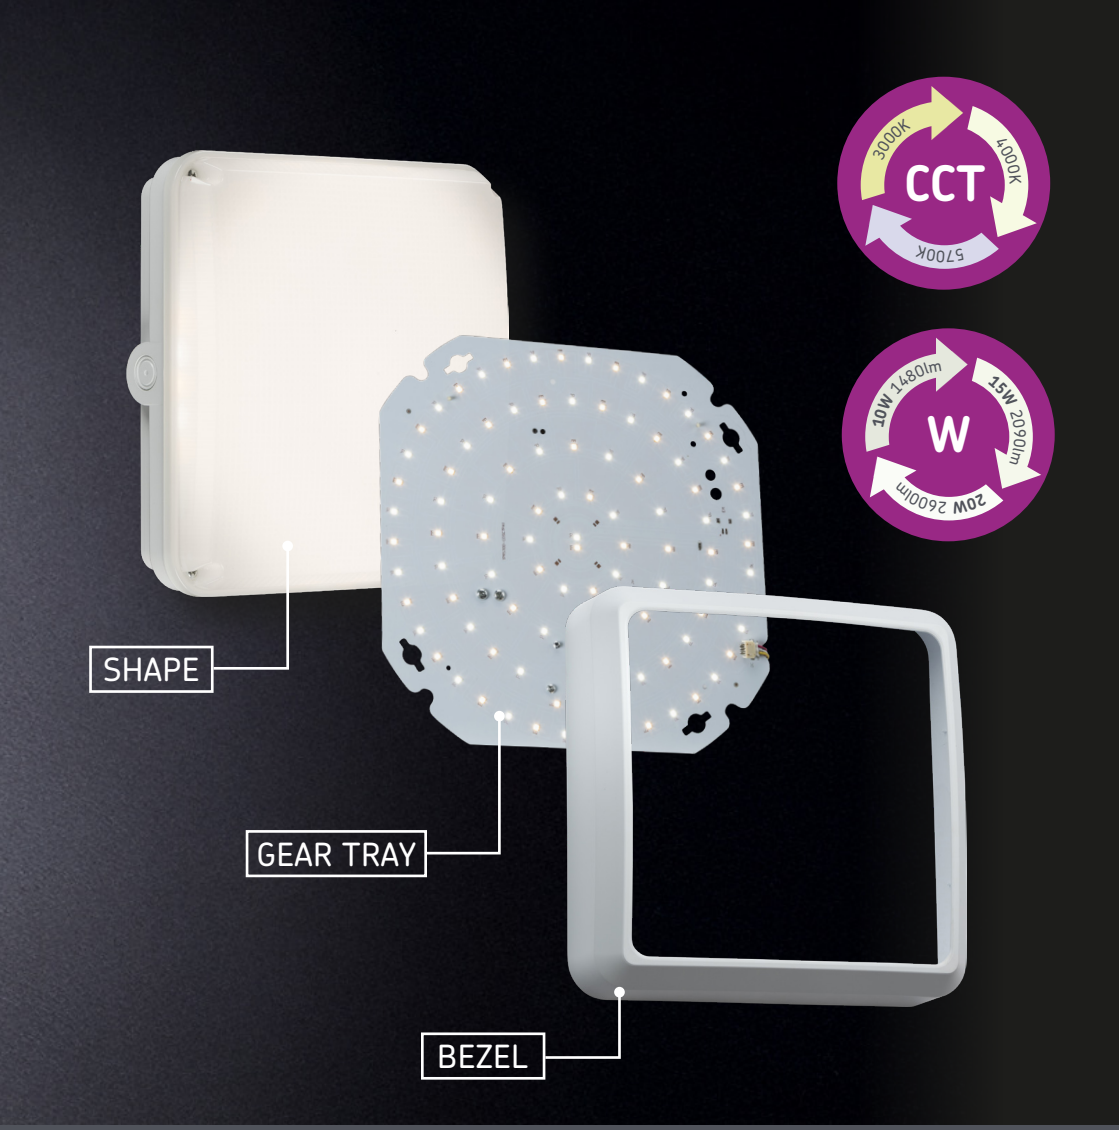

TAILORED SOLUTIONS

SELECT
COLOUR
BEZEL

AN EASY THREE STEP PROCESS THAT ALLOWS YOU TO CREATE A LIGHT SOLUTION FOR ANY ENVIRONMENT



SELECT
SHAPE AND COLOUR

TENAX CASINGS

- 4 x 20mm conduit entries
- BESA box compatible
- Stainless steel tamper proof screws
- UV-stabilised body

Construction: Polycarbonate



230V 50Hz | IP65 | IK10 | 5 YEAR WARRANTY

Code	Model	Colour	Casing	Dimensions (mm)
TNXOCW	Tenax One	White	Round	Ø: 280 P: 70
TNXOCBK	Tenax One	Black	Round	Ø: 280 P: 70
TNXQCW	Tenax Quad	White	Square	L: 245 W: 245 P: 70
TNXQCBK	Tenax Quad	Black	Square	L: 245 W: 245 P: 70

TENAX PRO - ANTI-VANDAL CASING

- 4 x 20mm conduit entries
- BESA box compatible
- Stainless steel tamper proof screws
- UV-stabilised body

Construction: Polycarbonate



230V 50Hz | IP66 | IK10 | 5 YEAR WARRANTY

Code	Model	Colour	Casing	Dimensions (mm)
TNXPROCBK	Tenax Pro	Black	Anti-vandal	Ø: 320 P: 80
TNXPROCG	Tenax Pro	Grey	Anti-vandal	Ø: 320 P: 80
TNXPROCEBK	Tenax Pro	Black	Anti-vandal Eyelid	Ø: 320 P: 82.5
TNXPROCEG	Tenax Pro	Grey	Anti-vandal Eyelid	Ø: 320 P: 82.5



SELECT
LED GEAR TRAY

TENAX WATTAGE AND CCT ADJUSTABLE LED GEAR TRAY

- Push-fit terminals with loop-in-loop-out capabilities

Construction: Aluminium
Lamp type: LED



230V 50Hz | IP20 | TRI WATTAGE | TRI CCT | * | 5 YEAR WARRANTY

Code	Wattage	Model	CCT	Lumens	Dimensions (mm)
TNXT	10/15/20W	Standard	3000/4000/5700K	Up to 2630lm	L: 235 W: 235 P: 28
TNXTEM	10/15/20W	Emergency	3000/4000/5700K	Up to 2630lm	L: 235 W: 235 P: 28
TNXTMW	10/15/20W	Sensor	3000/4000/5700K	Up to 2630lm	L: 235 W: 235 P: 28
TNXTMWEM	10/15/20W	Emergency + Sensor	3000/4000/5700K	Up to 2630lm	L: 235 W: 235 P: 28
TNXTMWST	10/15/20W	Self-test Emergency + Sensor	3000/4000/5700K	Up to 2630lm	L: 235 W: 235 P: 28
TNXTST	10/15/20W	Self-test Emergency	3000/4000/5700K	Up to 2630lm	L: 235 W: 235 P: 28
TNXTP	10/15/20W	Daylight Sensor	3000/4000/5700K	Up to 2630lm	L: 235 W: 235 P: 28
TNXTPEM	10/15/20W	Emergency + Daylight Sensor	3000/4000/5700K	Up to 2630lm	L: 235 W: 235 P: 28

* Class II rating applicable to the complete luminaire

TENAX QUAD/ONE BEZELS

Construction: Polycarbonate

SELECT
COLOUR BEZEL



IP66 | IK10

Code	Model	Colour	Casing	Dimensions (mm)
TNXOBEZBK	Tenax One	Black	Round	Ø: 290 P: 66
TNXOBEZW	Tenax One	White	Round	Ø: 290 P: 66
TNXQBEZBK	Tenax Quad	Black	Square	L: 255 W: 255 P: 65
TNXQBEZW	Tenax Quad	White	Square	L: 255 W: 255 P: 65

PROFESSIONAL

SHERPA IP65 LED BULKHEADS

A versatile lighting solution crafted for various settings. Featuring a sturdy die-cast aluminium body and a resilient, touch impact-resistant polycarbonate differ, these bulkheads ensure durability. The CCT LED gear tray offers standard, microwave sensor, and emergency options.



SHE1B



SHE1G

230V 50Hz | IP65 | IK10 | TRI CCT | LAMP INCLUDED | 5 YEAR WARRANTY

SHERPA 18W CCT ADJUSTABLE LED BULKHEAD

Construction: Die-cast aluminium
Lamp type: LED

Anti-vandal diffuser and fixings

Code	Wattage	Model	Finish	CCT	Lumens	Dimensions (mm)
SHE1B	18W	Standard	Black	3000/4000/6000K	1680/1790/1810lm	Ø: 360 P: 92
SHE1BEM	18W	Emergency	Black	3000/4000/6000K	1680/1790/1810lm	Ø: 360 P: 92
SHE1BEMP	18W	Emergency + Daylight Sensor	Black	3000/4000/6000K	1680/1790/1810lm	Ø: 360 P: 92
SHE1BEMS	18W	Emergency + Microwave Sensor	Black	3000/4000/6000K	1680/1790/1810lm	Ø: 360 P: 92
SHE1BP	18W	Daylight Sensor	Black	3000/4000/6000K	1680/1790/1810lm	Ø: 360 P: 92
SHE1BS	18W	Microwave Sensor	Black	3000/4000/6000K	1680/1790/1810lm	Ø: 360 P: 92
SHE1G	18W	Standard	Grey	3000/4000/6000K	1680/1790/1810lm	Ø: 360 P: 92
SHE1GEM	18W	Emergency	Grey	3000/4000/6000K	1680/1790/1810lm	Ø: 360 P: 92
SHE1GEMP	18W	Emergency + Daylight Sensor	Grey	3000/4000/6000K	1680/1790/1810lm	Ø: 360 P: 92
SHE1GEMS	18W	Emergency + Microwave Sensor	Grey	3000/4000/6000K	1680/1790/1810lm	Ø: 360 P: 92
SHE1GP	18W	Daylight Sensor	Grey	3000/4000/6000K	1680/1790/1810lm	Ø: 360 P: 92
SHE1GS	18W	Microwave Sensor	Grey	3000/4000/6000K	1680/1790/1810lm	Ø: 360 P: 92

With low energy consumption and minimal maintenance, these bulkheads provide anti-vandal protection and adjustable colour temperature at 3000K, 4000K and 6000K. Illuminate any space with efficiency and reliability.



SHERPA 18W CCT ADJUSTABLE LED EYELID BULKHEAD

Construction: Die-cast aluminium
Lamp type: LED

Anti-vandal diffuser and fixings

Code	Wattage	Model	Finish	CCT	Lumens	Dimensions (mm)
SHE2B	18W	Standard	Black	3000/4000/6000K	1020/1080/1090lm	Ø: 360 P: 94
SHE2BEM	18W	Emergency	Black	3000/4000/6000K	1020/1080/1090lm	Ø: 360 P: 94
SHE2BEMP	18W	Emergency + Daylight Sensor	Black	3000/4000/6000K	1020/1080/1090lm	Ø: 360 P: 94
SHE2BEMS	18W	Emergency + Microwave Sensor	Black	3000/4000/6000K	1020/1080/1090lm	Ø: 360 P: 94
SHE2BP	18W	Daylight Sensor	Black	3000/4000/6000K	1020/1080/1090lm	Ø: 360 P: 94
SHE2BS	18W	Microwave Sensor	Black	3000/4000/6000K	1020/1080/1090lm	Ø: 360 P: 94
SHE2G	18W	Standard	Grey	3000/4000/6000K	1020/1080/1090lm	Ø: 360 P: 94
SHE2GEM	18W	Emergency	Grey	3000/4000/6000K	1020/1080/1090lm	Ø: 360 P: 94
SHE2GEMP	18W	Emergency + Daylight Sensor	Grey	3000/4000/6000K	1020/1080/1090lm	Ø: 360 P: 94
SHE2GEMS	18W	Emergency + Microwave Sensor	Grey	3000/4000/6000K	1020/1080/1090lm	Ø: 360 P: 94
SHE2GP	18W	Daylight Sensor	Grey	3000/4000/6000K	1020/1080/1090lm	Ø: 360 P: 94
SHE2GS	18W	Microwave Sensor	Grey	3000/4000/6000K	1020/1080/1090lm	Ø: 360 P: 94



LED AMENITY WALL PACKS

- Robust polycarbonate base and diffuser
- Industrial, commercial and domestic use.
- Ideal for site lighting.
- Long-life, low cost, energy efficient.

Construction: Polycarbonate
Driver: Integral
Lamp type: LED







Code	Wattage	Model	Colour	CCT	Lumens	Dimensions (mm)
AMLEDB	5W	White / Black Base	Cool White	4000K	460lm	W: 108 L: 197 P: 78
AMLEDBS	5W	White / Black Base with Sensor	Cool White	4000K	410lm	W: 108 L: 197 P: 78
AMLEDBP	5W	White / Black Base with Daylight Sensor	Cool White	4000K	460lm	W: 108 L: 197 P: 78
AMLEDW	5W	White / White Base	Cool White	4000K	460lm	W: 108 L: 197 P: 78
AMLEDWS	5W	White / White Base with Sensor	Cool White	4000K	410lm	W: 108 L: 197 P: 78
AMLEDWP	5W	White / White Base with Daylight Sensor	Cool White	4000K	460lm	W: 108 L: 197 P: 78
AMLEDR	5W	Red / Black Base	Red	-	55lm	W: 108 L: 197 P: 78

E27 AMENITY BULKHEADS

- Aluminium base and clear prismatic cover
- E27 lampholder (lamp not included)
- Dimmable subject to lamp

Construction: Aluminium & polycarbonate
Lamp type: E27 (100W max.)

Code	Model	Dimensions (mm)
E27PC	Prismatic Diffuser	W: 105 L: 240 P: 110
E27PR	Red Diffuser	W: 105 L: 240 P: 110



230V 50Hz | IP65 | LAMP DEPENDENT | LAMP NOT INCLUDED | 1 YEAR WARRANTY

B22 AMENITY BULKHEADS

- Polycarbonate base and clear polycarbonate prismatic cover
- B22d lampholder (lamp not included)
- Dimmable subject to lamp

Construction: Aluminium & polycarbonate
Lamp type: B22d (BH22BC - 100W max. / BH22PB - 60W max.)

Code	Model	Dimensions (mm)
BH22BC	Aluminium Trim (Class I)	W: 124 L: 244 P: 120
BH22PB	Black Polycarbonate Trim (Class II)	W: 124 L: 244 P: 120



230V 50Hz | IP65 | LAMP DEPENDENT | LAMP NOT INCLUDED | 1 YEAR WARRANTY

E27 DOME BULKHEADS

- Vandal resistant wire guard aluminium construction
- E27 lamp holder (lamp not included)
- Dimmable subject to lamp

Construction: Aluminium & glass
Lamp type: E27 (60W max.)

Code	Model	Dimensions (mm)
TP0V60B	Black	H: 210 W: 100 P: 110



230V 50Hz | IP54 | LAMP DEPENDENT | LAMP NOT INCLUDED | 1 YEAR WARRANTY

WATTAGE AND CCT ADJUSTABLE LED WALL PACK WITH PHOTOCELL SENSOR

- Complete with Photocell sensor
- 2 x Wattage; 10W / 15W
- 3 x CCT; 3000K / 4000K / 6500K
- High lumen efficiency
- Robust polycarbonate construction, body and diffuser

Construction: Polycarbonate
Driver: Integral
Lamp type: LED



MADE FROM POLYCARBONATE



Code	Wattage	Model	CCT	Lumens	Dimensions (mm)
WPCWA	10/15W	Standard with Photocell Sensor	3000/4000/6500K	Up to 1950lm	H: 217 W: 147 P: 78
WPCWAEM	10/15W	Emergency with Photocell Sensor	3000/4000/6500K	Up to 1950lm	H: 217 W: 147 P: 78

LED CCT ADJUSTABLE WALL LIGHT

- Corrosion resistant
- Weather resistant
- Low maintenance
- CCT adjustable - 3000K, 4000K or 6500K

Construction: ABS & polycarbonate
Driver: Integral
Lamp type: SMD LED
Beam angle: 105°



MADE FROM POLYCARBONATE



Code	Wattage	CCT	Lumens	Dimensions (mm)
WP21CCT	21W	3000/4000/6500K	Up to 1200lm	H: 170 W: 320 P: 136



NEW

WATTAGE AND CCT ADJUSTABLE LED WALL PACK WITH PHOTOCELL

- Quad Wattage switchable
- CCT adjustable - 3000K, 4000K or 6000K
- Asymmetric lens
- Complete with photocell sensor
- Side and rear cable entry
- Corrosion and weather resistant

Construction: ABS & polycarbonate
Driver: Integral
Lamp type: SMD LED
Beam angle: 105°

MADE FROM POLYCARBONATE

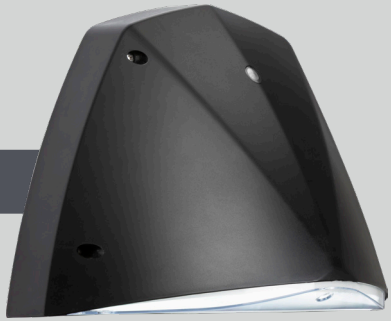



Code	Wattage	CCT	Lumens	Dimensions (mm)	
WPASCWA	14/17/21/24W	3000/4000/6000K	Up to 3095lm	H: 217 W: 309 P: 162	NEW











COMMERCIAL LIGHTING

COMMERCIAL DOWNLIGHTS

Ideal for office, retail, and various commercial environments. Explore our latest commercial lighting collection featuring four new recessed downlight ranges, alongside the incredibly versatile CPL LED panel downlights.

CPLCW CCT Surface / Recessed LED Downlight	382 - 385
KARA Slim LED Recessed Panel	386 - 387
ASHA LED Recessed TRI-CCT Downlight	388 - 389
SEREN LED Recessed TRI-Wattage TRI-CCT Downlight	390 - 391
SARA LED Recessed TRI-Wattage TRI-CCT Downlight	392 - 393



LED RECESS / SURFACE TRI-WATTAGE CCT ADJUSTABLE

PANEL DOWNLIGHTS

Redefine your lighting experience with our next-generation slim LED panel downlights, engineered for performance and adaptability. Designed to sit cleanly on the ceiling surface, these fittings can also retrofit into existing cut-outs, offering a flexible solution for both new installations and refurbishments. With dual-mount capability, dimmable control, IP54 protection, and selectable wattage and CCT (3000K/4000K/5700K), each unit can be tailored to suit the ambience and function of any space. Ideal for commercial, retail, and domestic environments, the range is available in four sizes with a choice of magnetic bezels - making it a truly versatile fit for any project.



EASY-FIT MAGNETIC BEZELS

Supplied with white bezel as standard





QUICK AND EASY INSTALLATION









SELECTABLE WATTAGES AND CCT

AVAILABLE ON ALL MODELS



NEW

4/6/8W TRI-WATTAGE AND CCT DUAL MOUNT DOWNLIGHT

- Adjustable recessed bracket, suitable for 65mm to 102mm cut out
- Wattage adjustable to 4W: Up to 370lm / 6W: 525lm / 8W: 715lm





Code	Wattage	Dimmable	Colour	Lumens	Cut-out (mm)	Dimensions (mm)	Min. Void (mm)	
CPLCW8	4/6/8W	Yes*	White	Up to 645lm	65-102	Ø: 140 P: 17.6	50	NEW
CPLCWBZ8BC	-	-	Brushed Chrome	-	-	Ø: 141.6 P: 18.5	-	NEW
CPLCWBZ8MB	-	-	Polished Chrome	-	-	Ø: 141.6 P: 18.5	-	NEW
CPLCWBZ8PC	-	-	Matt Black	-	-	Ø: 141.6 P: 18.5	-	NEW

*Please check compatibility before installation

6/9/12W TRI-WATTAGE AND CCT DUAL MOUNT DOWNLIGHT

- Adjustable recessed bracket, suitable for 65mm to 130mm cut out
- Wattage adjustable to 6W: Up to 580lm / 9W: 880lm / 12W: 1165lm





Code	Wattage	Dimmable	Colour	Lumens	Cut-out (mm)	Dimensions (mm)	Min. Void (mm)	
CPLCW12	6/9/12W	Yes*	White	Up to 1060lm	65-130	Ø: 165 P: 17.6	50	NEW
CPLCWBZ12BC	-	-	Brushed Chrome	-	-	Ø: 166.7 P: 18.5	-	NEW
CPLCWBZ12MB	-	-	Polished Chrome	-	-	Ø: 166.7 P: 18.5	-	NEW
CPLCWBZ12PC	-	-	Matt Black	-	-	Ø: 166.7 P: 18.5	-	NEW

12/15/18W TRI-WATTAGE AND CCT DUAL MOUNT DOWNLIGHT

- Adjustable recessed bracket, suitable for 65mm to 190mm cut out
- Wattage adjustable to 12W: Up to 1235lm / 15W: 1560lm / 18W: 1875m





Code	Wattage	Dimmable	Colour	Lumens	Cut-out (mm)	Dimensions (mm)	Min. Void (mm)	
CPLCW18	12/15/18W	Yes*	White	Up to 1695lm	65-190	Ø: 216 P: 17.5	50	NEW
CPLCWBZ18BC	-	-	Brushed Chrome	-	-	Ø: 217.7 P: 18.5	-	NEW
CPLCWBZ18MB	-	-	Polished Chrome	-	-	Ø: 217.7 P: 18.5	-	NEW
CPLCWBZ18PC	-	-	Matt Black	-	-	Ø: 217.7 P: 18.5	-	NEW

18/21/24W TRI-WATTAGE AND CCT DUAL MOUNT DOWNLIGHT

- Adjustable recessed bracket, suitable for 115mm to 255mm cut out
- Wattage adjustable to 18W: Up to 2080lm / 21W: 2415lm / 24W: 2710lm





Code	Wattage	Dimmable	Colour	Lumens	Cut-out (mm)	Dimensions (mm)	Min. Void (mm)	
CPLCW24	18/21/24W	Yes*	White	Up to 2455lm	115-255	Ø: 292 P: 17.6	50	NEW
CPLCWBZ24BC	-	-	Brushed Chrome	-	-	Ø: 293.3 P: 18.5	-	NEW
CPLCWBZ24MB	-	-	Polished Chrome	-	-	Ø: 293.3 P: 18.5	-	NEW
CPLCWBZ24PC	-	-	Matt Black	-	-	Ø: 293.3 P: 18.5	-	NEW



EASY-FIT MAGNETIC BEZELS

Supplied with white trim as standard



DOWNLIGHT EMERGENCY KIT

- Compatible with CPLCW panels
- Inverter and battery pack included
- Pre-wired with easy-fix connectors and LED charge indicator
- Luminaire not included

Construction: Polycarbonate



Code	Model	Dimensions (mm)
CPLEM	3-Hour LED Emergency Pack	H: 24 W: 34 L: 211

KARA SLIM LED RECESSED PANEL

- Low profile design, ideal for shallow ceiling application
- Remote driver with plug and play connector for easy installation
- Compatible emergency kit available (EMKIT2LSM)

Construction: Polycarbonate
Driver: Constant Current
LED Type: SMD LED



SLIM DESIGN

ONLY 24MM HEIGHT
LOW PROFILE PROJECTION

230V 50Hz | IP20 | LAMP INCLUDED | 3 YEAR WARRANTY







KA6CW **6W** KA12CW **12W** KA18CW **18W** KA24CW **24W**



KARA 230V IP20 6W LED RECESSED PANEL - 4000K

Code	Wattage	Dimmable	Colour	Lumens	Cut-out (mm)	Dimensions (mm)	Recessed Depth (mm)	Min. Void (mm)
KA6CW	6W	No	4000K	550lm	Ø: 135	Ø: 149	24	75
KA6CWTD	6W	Yes*	4000K	550lm	Ø: 135	Ø: 149	24	75

KARA 230V IP20 12W LED RECESSED PANEL - 4000K

Code	Wattage	Dimmable	Colour	Lumens	Cut-out (mm)	Dimensions (mm)	Recessed Depth (mm)	Min. Void (mm)
KA12CW	12W	No	4000K	1570lm	Ø: 155	Ø: 169	24	75
KA12CWTD	12W	Yes*	4000K	1570lm	Ø: 155	Ø: 169	24	75

KARA 230V IP20 18W LED RECESSED PANEL - 4000K

Code	Wattage	Dimmable	Colour	Lumens	Cut-out (mm)	Dimensions (mm)	Recessed Depth (mm)	Min. Void (mm)
KA18CW	18W	No	4000K	1800lm	Ø: 205	Ø: 224	24	75
KA18CWTD	18W	Yes*	4000K	1800lm	Ø: 205	Ø: 224	24	75

KARA 230V IP20 24W LED RECESSED PANEL - 4000K

Code	Wattage	Dimmable	Colour	Lumens	Cut-out (mm)	Dimensions (mm)	Recessed Depth (mm)	Min. Void (mm)
KA24CW	24W	No	4000K	2270lm	Ø: 285	Ø: 296	24	75
KA24CWTD	24W	Yes*	4000K	2270lm	Ø: 285	Ø: 296	24	75

*Please check compatibility before installation

COMPATIBLE WITH DUAL-MODE LED EMERGENCY KIT EMKIT2LSM: SELF-TEST/MANUAL.
AVAILABLE ON PAGE 439



ASHA LED RECESSED TRIPLE CCT DOWNLIGHT

- Robust polycarbonate construction
- Adjustable CCT (3000K/ 4000K / 5700K)
- Non Dimmable
- Remote driver with plug and play connector for easy installation
- Compatible emergency kit available (EMKIT2LSM)

Construction: Polycarbonate
Driver: Constant Current
LED Type: SMD LED



CCT ADJUSTABLE

LOCK CCT ON REAR OF PRODUCT

3000K	4000K	5700K

230V 50Hz
IP20
IP54
LAMP INCLUDED
TRI CCT
3 YEAR WARRANTY

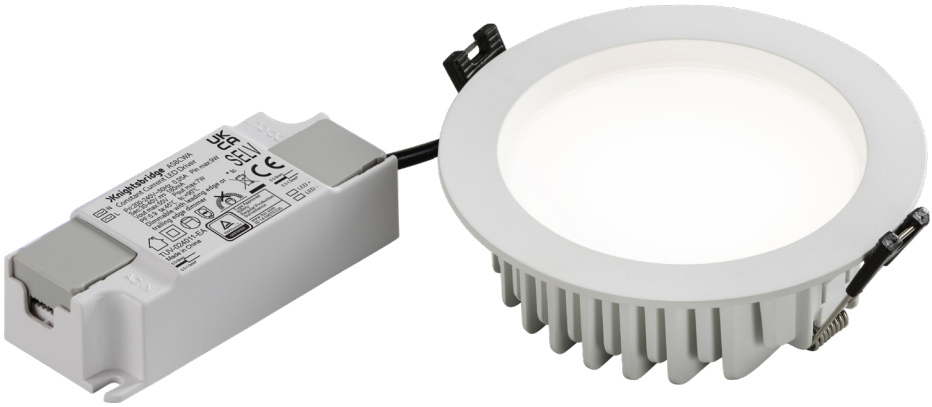





AS8CWA **8W**
AS15CWA **15W**
AS20CWA **20W**
AS30CWA **30W**









Code	Wattage	CCT	Lumens	Cut-out (mm)	Dimensions (mm)	Min. Void (mm)
AS8CWA	8W	3000/4000/5700K	750/810/805lm	Ø: 90	Ø: 110	86
AS15CWA	15W	3000/4000/5700K	1620/1755/1735lm	Ø: 125	Ø: 145	96
AS20CWA	20W	3000/4000/5700K	2215/2350/2385lm	Ø: 165	Ø: 190	96
AS30CWA	30W	3000/4000/5700K	3400/3695/3600lm	Ø: 205	Ø: 235	96

COMPATIBLE WITH OUR LED 3-HOUR EMERGENCY KIT EMKIT2LSM. AVAILABLE ON PAGE 439



SEREN LED RECESSED TRIPLE WATTAGE AND CCT DOWNLIGHT

- 3 x Selectable wattage via driver DIP switch
- 3 x CCT (3000K, 4000K, 5000K)
- Die cast aluminium housing with white powder coated finish
- Comes with plug and play connectors for ease of installation
- Compatible Emergency Kit available (EMKIT2LSM)

Construction: Aluminium
Driver: Constant Current
LED Type: SMD LED



CCT ADJUSTABLE

LOCK CCT ON CABLE SWITCH

3000K | 4000K | 5000K



TRI-WATTAGE CONTROL

3 X SELECTABLE WATTAGE
VIA DRIVER DIP SWITCH







SER712xx **7/10/12W**



SER1525xx **15/20/25W**



SER3040xx **30/35/40W**



SEREN LED RECESSED TRIPLE WATTAGE AND CCT DOWNLIGHT

Code	Wattage	CCT	Lumens	Cut-out (mm)	Dimensions (mm)	Min. Void (mm)
SER712	7/10/12W	3000/4000/5000K	Up to 1575lm	Ø: 125	Ø: 143	100
SER1525	15/20/25W	3000/4000/5700K	Up to 3290lm	Ø: 170	Ø: 192	100
SER3040	30/35/40W	3000/4000/5700K	Up to 4900lm	Ø: 200	Ø: 220	100

SEREN LED RECESSED TRIPLE WATTAGE AND CCT 0-10V DOWNLIGHT

- 0-10V dimmable - please check compatibility before installation

Code	Wattage	CCT	Lumens	Cut-out (mm)	Dimensions (mm)	Min. Void (mm)
SER712AD	7/10/12W	3000/4000/5000K	Up to 1575lm	Ø: 125	Ø: 143	100
SER1525AD	15/20/25W	3000/4000/5000K	Up to 3290lm	Ø: 170	Ø: 192	100
SER3040AD	30/35/40W	3000/4000/5000K	Up to 4900lm	Ø: 200	Ø: 220	100

SEREN LED RECESSED TRIPLE WATTAGE AND CCT DOWNLIGHT WITH DALI

- DALI2 control gear for connection into simple room or networked building control system.

Code	Wattage	CCT	Lumens	Cut-out (mm)	Dimensions (mm)	Min. Void (mm)
SER1525DALI	15/20/25W	3000/4000/5000K	Up to 3290lm	Ø: 170	Ø: 192	100
SER3040DALI	30/35/40W	3000/4000/5000K	Up to 4900lm	Ø: 200	Ø: 220	100

COMPATIBLE WITH OUR LED 3-HOUR EMERGENCY KIT EMKIT2LSM. AVAILABLE ON PAGE 439



SARA LED RECESSED TRIPLE WATTAGE AND CCT DOWNLIGHT

- 3 x Selectable wattage via driver DIP switch
- 3 x CCT (3000K, 4000K, 5000K)
- Die cast aluminium housing with white powder coated finish
- Comes with plug and play connectors for ease of installation
- Compatible Emergency Kit available (EMKIT2LSM)

Construction: Aluminium
Driver: Constant Current
LED Type: SMD LED
Rotation and Tilt angle: 40°/350°

230V 50Hz | IP20 | LAMP INCLUDED | TRI CCT | 5 YEAR WARRANTY



CCT ADJUSTABLE

LOCK CCT ON CABLE SWITCH

3000K | 4000K | 5000K



TRI-WATTAGE CONTROL

3 X SELECTABLE WATTAGE
VIA DRIVER DIP SWITCH





SA1525Cxxx **15/20/25W**



SA3040Cxxx **30/35/40W**



SA3040RWxxx **30/35/40W**



SARA LED RECESSED TRIPLE WATTAGE AND CCT DOWNLIGHT

Code	Wattage	CCT	Lumens	Cut-out (mm)	Dimensions (mm)	Min. Void (mm)
SA1525C	15/20/25W	3000/4000/5000K	Up to 2605lm	Ø: 140	Ø:157	160
SA3040C	30/35/40W	3000/4000/5000K	Up to 4280lm	Ø: 170	Ø:190	180
SA3040RW	30/35/40W	3000/4000/5000K	Up to 5235lm	W:225 D:127	W:240 D:157	145

*Please check compatibility before installation

SARA LED RECESSED TRIPLE WATTAGE AND CCT 0-10V DOWNLIGHT

- 0-10V dimmable - please check compatibility before installation

Code	Wattage	CCT	Lumens	Cut-out (mm)	Dimensions (mm)	Min. Void (mm)
SA1525CAD	15/20/25W	3000/4000/5000K	Up to 2605lm	Ø: 140	Ø:157	160
SA3040CAD	30/35/40W	3000/4000/5000K	Up to 4280lm	Ø: 170	Ø:190	180
SA3040RWAD	30/35/40W	3000/4000/5000K	Up to 5235lm	W:225 D:127	W:240 D:157	145

SARA LED RECESSED TRIPLE WATTAGE AND CCT WITH DALI

- DALI2 control gear for connection into simple room or networked building control system.

Code	Wattage	CCT	Lumens	Cut-out (mm)	Dimensions (mm)	Min. Void (mm)
SA1525CDALI	15/20/25W	3000/4000/5000K	Up to 2605lm	Ø: 140	Ø:157	160
SA3040CDALI	30/35/40W	3000/4000/5000K	Up to 4280lm	Ø: 170	Ø:190	180
SA3040RWDALI	30/35/40W	3000/4000/5000K	Up to 5235lm	W:240 D:157	W:225 D:127	145

COMPATIBLE WITH OUR LED 3-HOUR EMERGENCY KIT EMKIT2LSM (MANUAL/ SELF TEST DUAL MODE) AND EMKIT2DA (DALI2) AVAILABLE ON PAGE 439













COMMERCIAL LIGHTING

RECESSED, SURFACE, & SUSPENSION LIGHTING

Modular panels, surface-mounted and suspension lighting. Ideal for offices, retail, education, and a wide array of other commercial facilities

LUMI Pro CCT LED Panels	396
ELENA Wattage/CCT Adjustable Troffer Panels	397
Recessed Modular LED Fittings	398
SUR5 Dual Mount LED Luminaires	399 - 400
Linear Fittings	401 - 403



LUMI PRO BACKLIT CCT LED PANEL

- Compatible with standard 600x600mm 15mm and 25mm grids
- Highly efficient, up to 130lm/W
- Tp(a) and UGR19 rated diffuser
- 1-10V and DALI2 dimmable options
- 3000K/4000K/5700K
- Accessories available: 3-hour emergency kit, surface-mounted kit and suspension kit
- Compatible Emergency Kit available

Construction: Aluminium
Driver: Included
Lamp type: LED





Code	Wattage	Model	CCT	Lumens	Dimensions (mm)
LUMI6060PRO	30W	Non-dimmable	3000/4000/5700K	Up to 4100lm	W: 595 L: 595 D: 25
LUMI6060PROAD	30W	1-10V	3000/4000/5700K	Up to 4100lm	W: 595 L: 595 D: 25
LUMI6060PRODALI	30W	DALI2	3000/4000/5700K	Up to 4100lm	W: 595 L: 595 D: 25

ACCESSORIES


LPANKIT2


LPANS


EMKIT2LSM


EMKIT2DA

Code	Model
LPANKIT2	Surface mount kit for 600x600 LED panel
LPANS	Suspension Kit

Code	Model
EMKIT2LSM	Manual / Self test dual mode Emergency Kit
EMKIT2DA	DALI2 Emergency Kit



ELENA CCT ADJUSTABLE TROFFER PANEL

- Easy to specify, install and adjust at a later date - simply by changing a setting
- Fits standard 600x600 ceiling grids
- Robust pressed steel construction and polycarbonate diffuser
- 3000K, 4000K, 5700K selectable CCT
- 2 selectable wattage/lumen outputs
- Highly efficient - up to 140lm/w
- Tp(a) rated
- Self-test 3-hour emergency option

Construction: Pressed steel & polycarbonate
Driver: Included
Lamp type: SMD LED



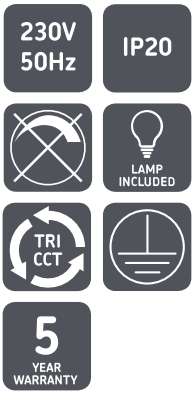

Code	Wattage	Model	CCT	Lumens	Dimensions (mm)
EL6060	23W/33W	Standard	3000/4000/5700K	Up to 4500lm	W: 595 L: 595 P: 70
EL6060EM	23W/33W	Self-test Emergency	3000/4000/5700K	Up to 4500lm	W: 595 L: 595 P: 70

CONTROL/ENERGY SAVING OPTIONS
SEE PAGE 214 FOR SENSORS





LED RECESSED MODULAR FITTINGS

- An energy-efficient alternative to standard 4x18W fluorescent modular fittings
- Long life, low maintenance
- Compatible with standard 600 x 600mm 15mm and 25mm grids
- Instant ignition, ideal for external sensors
- Compatible Emergency Kit available (EMKIT2LSM)

Construction: Steel
Driver: Included
Lamp type: LED





Code:	Wattage	CCT	Lumens	Dimensions (mm)	Recessed Depth (mm)
MRBLED	32W	4000K	3370lm	W: 595 L: 595	D: 52

FIRE HOODS

Code	Model
FR600	Fire Hood (600mm x 600mm)
FR1200	Fire Hood (600mm x 1200mm)


FR600


FR1200

EMERGENCY KITS ALSO AVAILABLE: EMKIT2LSM
SEE PAGE 439





SUR5 DUAL-MOUNT LED LUMINAIRE

Easy to install surface or suspended, boasting quality and innovation offering superior uniform illumination

- Retrofit replacement for older fluorescent technology
- Push-fit terminals with loop-in/loop-out for easy wiring
- Low profile modern design
- Robust pressed steel construction
- Energy, time, and cost-efficient lighting – made for the trade
- Suspension kit sold separately: 5FTT5KIT

Construction: Pressed steel & Polypropylene
Driver: Included
Lamp type: SMD LED





Code	Wattage	Model	Finish	CCT	Lumens	Dimensions (mm)
SUR5LED	45W	Standard	White	4000K	4790lm	W: 200 L: 1500 P: 45
SUR5LEDG	45W	Standard	Grey	4000K	4200lm	W: 200 L: 1500 P: 45
SUR5LEDBK	45W	Standard	Black	4000K	4200lm	W: 200 L: 1500 P: 45
SUR5LEDEM	45W	Emergency	White	4000K	4790lm	W: 200 L: 1500 P: 45
SUR5LEDEMG	45W	Emergency	Grey	4000K	4200lm	W: 200 L: 1500 P: 45
SUR5LEDEMBK	45W	Emergency	Black	4000K	4200lm	W: 200 L: 1500 P: 45

SLIMLINE DUAL MOUNT LED FITTING

Code	Wattage	Model	Finish	CCT	Lumens	Dimensions (mm)
SUR5SL	40W	Standard	White	4000K	3600lm	W: 145 L: 1500 P: 45
SUR5SLG	40W	Standard	Grey	4000K	3010lm	W: 145 L: 1500 P: 45
SUR5SLBK	40W	Standard	Black	4000K	3010lm	W: 145 L: 1500 P: 45
SUR5SLEMG	40W	Emergency	Grey	4000K	3010lm	W: 145 L: 1500 P: 45
SUR5SLEM	40W	Emergency	White	4000K	3600lm	W: 145 L: 1500 P: 45
SUR5SLEMBK	40W	Emergency	Black	4000K	3010lm	W: 145 L: 1500 P: 45



SUR5 SUSPENDED DIRECT/INDIRECT LUMINAIRE

The SUR5LEDI is a lightweight, low profile with a Direct and Indirect light output. Ideal replacement for older fluorescent luminaires with the added benefit of soft ceiling illumination

- 75% direct output, 4035lm
- 25% indirect output, 1520lm
- 2-meter suspension kit included
- Push-fit terminals with loop-in / loop-out for easy wiring

Construction: Pressed steel & Polypropylene
Driver: Included
Lamp type: LED





Code	Wattage	Model	Finish	CCT	Lumens	Dimensions (mm)
SUR5LEDI	55W	Standard	White	4000K	4880lm	W: 200 L: 1500 P: 45
SUR5LEDIG	55W	Standard	Grey	4000K	4880lm	W: 200 L: 1500 P: 45
SUR5LEDIEM	55W	Emergency	White	4000K	4880lm	W: 200 L: 1500 P: 45
SUR5LEDIEMG	55W	Emergency	Grey	4000K	4880lm	W: 200 L: 1500 P: 45



VEXA SURFACE MOUNTED LINEAR FITTING

Designed for professional environments, this luminaire ensures optimal lighting with minimal glare, making it ideal for offices, schools, and healthcare settings. Its versatile, multi-position terminal block and two-part conduit knock-out allow seamless integration with 20mm conduit or mini-trunking. Featuring push-fit terminals, loop-in/loop-out wiring, and a hinged gear tray for easy installation, the robust steel and polycarbonate design meets UGR<19 standards, enhancing visual comfort and productivity in commercial spaces.

- Push-fit terminals with loop-in-loop-out, 20mm conduit entries and hinged gear tray for easy wiring
- Ideal for office, education, healthcare and retail
- Robust pressed steel and polycarbonate construction
- UGR19, reduces glare, enhances visual comfort and productivity

Construction: Pressed steel & polycarbonate
Driver: Included
Lamp type: SMD LED





Code	Wattage	Model	Finish	CCT	Lumens	Dimensions (mm)
VEXA5	30W	Standard	White	4000K	3500lm	W: 120 L: 1500 P: 59
VEXA5EM	30W	Emergency	White	4000K	3500lm	W: 120 L: 1500 P: 59



NEW

PRECEPTOR MODULAR CCT AND WATTAGE ADJUSTABLE UGR19 LINEAR FITTING

Preceptor is a versatile batten range designed to make upgrades easy, improve visual comfort, and work smoothly across multiple applications.

- Modular design: Optional plug and play Emergency Kit and Sensor available
- UGR19, reduce glare, enhances visual comfort and productivity
- Rear and end conduit fixings
- Standard 600mm centres and BESA box compatible
- Hinged gear tray
- Push-fit loop in-loop out terminal block

Construction: Pressed steel
Driver: Included
Lamp type: LED



230V 50Hz | IP20 | IK08 | UGR19 | QUAD W | TRI CCT | 7 YEAR WARRANTY

Code	Wattage	Model	Finish	CCT	Lumens	Dimensions (mm)	
PRECW4	18/21/26/30W	4ft	White	3000/4000/5700K	Up to 3700lm	L: 1180 W: 206 P: 80	NEW
PRECW5	24/30/36/44W	5ft	White	3000/4000/5700K	Up to 5200lm	L: 1480 W: 206 P: 80	NEW

MODULAR ACCESSORIES

- For maintained and non-maintained use
- 3-hour Lithium LiFePO4 battery
- Fully adjustable detection area, hold time and lux levels





Code	Function	
MODEMKIT2	3W Modular Dual Mode Emergency Kit	NEW
MODMWS	Modular Microwave Sensor	

230V 50Hz | DUAL MODE | LITHIUM LiFePO4 (MODEMKIT2 ONLY) | 5 YEAR WARRANTY

SUSPENSION FIXING KIT

Code	Description
5FTT5KIT	Suspension Fixing Kit





VIIVA LINEAR FITTING

Viiva delivers modern, glare-controlled linear lighting with adjustable outputs and clean aesthetics, ideal for offices and commercial interiors.

- Selectable wattage outputs for varying illumination requirements
- Selectable 3000K, 4000K, 5700K CCTs
- UGR<19 rating on lowest wattage setting*
- 4ft and 5ft options
- Surface mount brackets included
- Suspension Kit sold separately: 5FTT5KIT
- 3-hour Emergency Kit sold separately: VVAEMKIT

Construction: Aluminium & polycarbonate
Driver: Included
Lamp type: SMD LED





Code	Wattage	Model	Finish	CCT	Lumens	Dimensions (mm)
VVA4W	17/20/34/36W	4ft	White	3000/4000/5700K	Up to 2875lm	W: 48 L: 1200 H: 63
VVA4BK	17/20/34/36W	4ft	Black	3000/4000/5700K	Up to 3155lm	W: 48 L: 1200 H: 63
VVA5W	20/28/38/42W	5ft	White	3000/4000/5700K	Up to 3730lm	W: 48 L: 1500 H: 63
VVA5BK	20/28/38/42W	5ft	Black	3000/4000/5700K	Up to 3645lm	W: 48 L: 1500 H: 63

VIIVA LINEAR EMERGENCY KIT

- Lithium (LiFePO4) battery

Construction: Polycarbonate



Code	Dimensions (mm)	
VVAEMKIT	W: 37 L: 251 H: 26	**NEW**









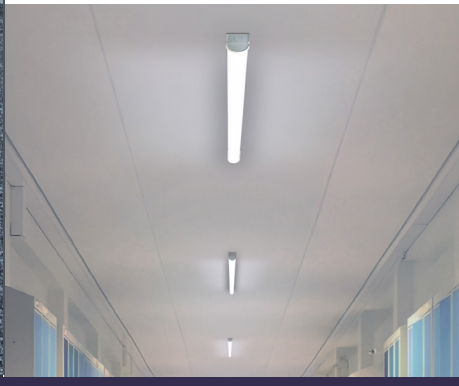

COMMERCIAL LIGHTING

BATTENS

Our extensive range of battens provides a suitable product for any application. This includes innovative LED battens designed for quick and easy installations

T8 LED Tubes | T8 LED Battens 406 - 407

BATM IP20 MODULAR LED BATTENS

Corner-Mounted Battens 410

Single Colour Battens 411

CCT & Wattage Adjustable Battens | DALI CCT Adjustable Battens 412



T8 LED TUBES

- Alternative to classic T8 fluorescent lamps
- Up to 130lm/W
- Instant ignition provides uniform illumination
- Integral driver for ease of installation
- Not for use with external electronic or magnetic ballasts

Lamp type: LED



230V 50Hz | IP20 | 2 YEAR WARRANTY

Code	Wattage	Construction	Model	CCT	Lumens	Dimensions (mm)	Qty
T8LEDP9CW	9W	Glass	2ft	4000K	1090lm	L: 603 Ø: 27	4
T8LEDP9DL	9W	Glass	2ft	6000K	1080lm	L: 603 Ø: 27	4
T8LEDP18CW	18W	Glass	4ft	4000K	2295lm	L: 1212 Ø: 27	4
T8LEDP18DL	18W	Glass	4ft	6000K	2230lm	L: 1212 Ø: 27	4
T8LEDP24CW	24W	Glass	5ft	4000K	2980lm	L: 1512 Ø: 27	4
T8LEDP24DL	24W	Glass	5ft	6000K	2895lm	L: 1512 Ø: 27	4
T8LED6	30W	Polycarbonate	6ft	4000K	3350lm	L: 1778 Ø: 26	1
T8LED6D	30W	Polycarbonate	6ft	6000K	3400lm	L: 1778 Ø: 26	1

DID YOU KNOW?

FLUORESCENTS ARE GONE – TIME TO SWITCH TO LED!

As of February 2025, the sale of all fluorescent lighting will officially end in the UK and EU under the latest Ecodesign and RoHS directives. If you're still relying on fluorescent tubes, now is the time to act before replacements become unavailable.

WHY MAKE THE SWITCH?

LEDs offer a smarter, more efficient lighting solution:

- Energy-Saving - Uses up to 50% less energy than fluorescent equivalents.
- Cost-Effective - Reduced running costs and maintenance expenses.
- Eco-Friendly - Fully compliant with sustainability regulations.
- Superior Performance - Instant start-up, no flickering, and enhanced light output.

HOW KNIGHTSBRIDGE CAN HELP

Upgrading doesn't have to be complicated! Our T8 LED tubes provide a simple, cost-effective retrofit solution. With a quick rewire (check the instruction manual for details), you can convert your outdated fluorescent fittings and start benefiting from LED technology right away.

T8 LED READY BATTENS

- Supplied pre-wired for use with dedicated T8 LED self-ballasted tubes
- Supplied without a ballast (necessary for use with fluorescent lights)
- For use with LED tubes which are powered from one side only
- Replaces most standard traditional T8 fluorescent fixtures
- LED tubes not included

Construction: Steel

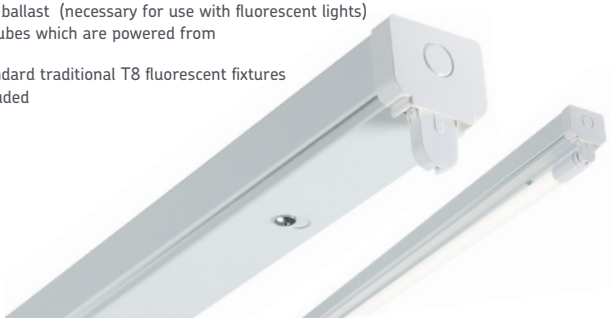



Code	Model	Dimensions (mm)	Qty
T8LB14	Single (4ft)	W: 63 L: 1225 P: 80	4
T8LB15	Single (5ft)	W: 63 L: 1525 P: 80	4
T8LB16	Single (6ft)	W: 63 L: 1790 P: 80	4
T8LB24	Twin (4ft)	W: 102 L: 1225 P: 86	4
T8LB25	Twin (5ft)	W: 102 L: 1525 P: 86	4
T8LB26	Twin (6ft)	W: 102 L: 1790 P: 86	4

OS021 AND OS021PIR BATTEN SENSOR. SEE PAGE 218



LED SINGLE BATTENS

- Double-insulated, lightweight, versatile, slimline design
- Simple installation via an easy-wire terminal box on the rear
- Alternative option to T5/T8 batten
- Ideal for commercial, retail, and domestic use in hallways, kitchens, and under cabinets

Construction: Aluminium & polycarbonate

Lamp type: LED





Code	Wattage	Model	CCT	Lumens	Dimensions (mm)
LEDBAT9	9W	2ft	4000K	900lm	W: 30 L: 605 P: 45
LEDBAT17	17W	4ft	4000K	1800lm	W: 30 L: 1220 P: 45
LEDBAT22	22W	5ft	4000K	2400lm	W: 30 L: 1520 P: 45
LEDBAT26	25W	6ft	4000K	2700lm	W: 30 L: 1768 P: 45

MODULAR LED BATTENS



HINGED GEAR TRAY



MICROWAVE
SENSOR MODULE



EMERGENCY
SENSOR MODULE



CEILING AND END
CONDUIT FIXINGS



BATM

HIGH EFFICIENCY - UP TO 140 LM/W
SINGLE COLOUR - 4000K
EMERGENCY AND MICROWAVE MODULE COMPATIBILITY



BATMCRN

HIGH EFFICIENCY - UP TO 135 LM/W
SINGLE COLOUR - 4000K
UNIQUE MOUNTING SOLUTION
EMERGENCY AND MICROWAVE MODULE COMPATIBILITY



BATMCW

HIGH EFFICIENCY - UP TO 150 LM/W
CCT & WATTAGE ADJUSTABLE
EMERGENCY AND MICROWAVE MODULE COMPATIBILITY



BATMCDA

HIGH-EFFICIENCY - UP TO 140 LM/W
DALI CONTROL AND MONITORING
TRI-CCT ADJUSTABLE
DALI EMERGENCY MODULE

IDEAL FOR:

WAREHOUSES | OFFICES | RETAIL SPACE | RESIDENTIAL | RETROFITTING

Modular battens give you the practicality of a standard batten - with the intelligence and adaptability of a system solution.

FLEXIBLE LIGHTING | BUILT AROUND YOUR PROJECT

WHAT DOES **"MODULAR"** ACTUALLY MEAN?

Modular battens are designed to make aspects of commercial lighting simpler, faster, and more adaptable. Unlike traditional one-piece fittings, a modular batten is built around a core luminaire body that can be customised with interchangeable components - giving you flexibility without multiplying SKUs.



A MODULAR BATTEN CONSISTS OF:

MAIN BATTEN BODY
the primary light source, housing and driver

INTERCHANGEABLE MODULES
such as emergency packs or microwave sensors

TOOL-FREE OR PLUG-AND-PLAY CONNECTIONS
allowing upgrades in seconds

This means you can install the standard fitting and add functionality only where required or upgrade later without replacing the entire fitting.

WHY MODULAR ?

FEWER SKUS TO MANAGE
One base fitting, multiple configuration options. Ideal for wholesalers and contractors looking to streamline stock.

FUTURE-PROOF FLEXIBILITY
Need emergency coverage in selected areas? Adding presence detection later? Modular systems allow changes without full replacement.

FASTER INSTALLATION
Push-fit terminals, hinged gear trays, and plug-in modules reduce time on site.



CORNER-MOUNTED MODULAR LED BATTEN

Create a well-lit functional environment with this innovative installation method which minimises glare and dark spots. Free up ceiling space and make the most out of narrow corridors.

- Plug-in modules available with various lengths and wattages for flexible applications.
- High efficiency
- Hinged gear tray, rear/end conduit entries, BESA compatibility, and 600mm fixing points.
- Push-fit loop in-loop out terminal block
- Three individual integrated push-fit terminals, centrally and at both ends, for fast, tool-free wiring.

Construction: Pressed steel
Driver: Included
Lamp type: LED

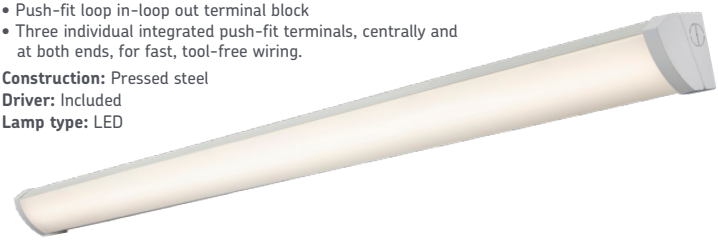

230V 50Hz | IP20 | LAMP INCLUDED | 5 YEAR WARRANTY

Code	Wattage	CCT	Lumens	Dimensions (mm)
BATMCRN2	10W	4000K	1350lm	W: 75 L: 615 H: 85
BATMCRN4	20W	4000K	2700lm	W: 75 L: 1225 H: 85
BATMCRN5	33W	4000K	4400lm	W: 75 L: 1525 H: 85

MODULAR ACCESSORIES

- For maintained and non-maintained use
- 3-hour Lithium LiFePO4 battery
- Fully adjustable detection area, hold time and lux levels





Code	Function	
MODEMKIT2	3W Modular Dual Mode Emergency Kit	NEW
MODMWS	Modular Microwave Sensor	

230V 50Hz | DUAL MODE | LITHIUM LiFePO4 (MODEMKIT2 ONLY) | 5 YEAR WARRANTY



MODULAR BATTENS SINGLE COLOUR 4000K

- Plug-in modules available with various lengths and wattages for flexible applications.
- Up to 140 lm/W using advanced LED chip and driver technology.
- Hinged gear tray, rear/end conduit entries, BESA compatibility, and 600mm fixing points.
- Push-fit loop-in/loop-out terminal block.
- Three individual integrated push-fit terminals, centrally and at both ends, for fast, tool-free wiring.

Construction: Pressed steel
Driver: Included
Lamp type: LED





Code	Wattage	Model	CCT	Lumens	Dimensions (mm)	
BATM2	10W	2ft	4000K	1400lm	W: 61 L: 615 P: 61	
BATM3	15W	3ft	4000K	2100lm	W: 61 L: 925 P: 70	NEW
BATM4	20W	4ft	4000K	2800lm	W: 61 L: 1225 P: 61	
BATM5	33W	5ft	4000K	4600lm	W: 61 L: 1525 P: 61	
BATM5H	43W	5ft High Lumen	4000K	6150lm	W: 61 L: 1525 P: 61	
BATM6	38W	6ft	4000K	5250lm	W: 61 L: 1790 P: 61	
BATM6H	48W	6ft High Lumen	4000K	6700lm	W: 61 L: 1790 P: 61	

MODULAR ACCESSORIES

- For maintained and non-maintained use
- 3-hour Lithium LiFePO4 battery
- Fully adjustable detection area, hold time and lux levels







Code	Function	
MODEMKIT2	3W Modular Dual Mode Emergency Kit	NEW
MODMWS	Modular Microwave Sensor	

MODULAR CCT & WATTAGE ADJUSTABLE BATTEN

- Plug-in modules available with various lengths and wattages for flexible applications.
- High efficiency up to 150 lm/W
- Colour adjustable, 3000K/ 4000K/ 5700K
- Wattage adjustable
- Powered by Tridonic LED drivers
- Hinged gear tray, rear/end conduit entries, BESA compatibility, and 600mm fixing points.
- Push-fit loop in-loop out terminal block
- Three individual integrated push-fit terminals, centrally and at both ends, for fast, tool-free wiring.

Construction: Pressed steel & polycarbonate
Driver: Included
Lamp type: LED



230V 50Hz | IP20 | LAMP INCLUDED | 7 YEAR WARRANTY

Code	Wattage	Model	CCT	Lumens	Dimensions (mm)
BATMCW4	17/22/26/31W	4ft	3000/4000/5700K	Up to 4500lm	W: 61 L: 1225 P: 70
BATMCW5	22/28/34/41W	5ft	3000/4000/5700K	Up to 6000lm	W: 61 L: 1525 P: 70
BATMCW6	28/34/41/49W	6ft	3000/4000/5700K	Up to 7200lm	W: 61 L: 1790 P: 70

MODULAR ACCESSORIES

- For maintained and non-maintained use
- 3-hour Lithium LiFePO4 battery
- Fully adjustable detection area, hold time and lux levels



230V 50Hz | LITHIUM LiFePO4 | 5 YEAR WARRANTY

Code	Model	
MODEMKIT2	3W Modular Dual mode Emergency Kit	NEW
MODMWS	Modular Microwave Sensor	

MODULAR DALI2 CCT ADJUSTABLE BATTENS

- Optional modular DALI emergency conversion kit, MODEMKITDA
- High efficiency up to 140 lm/W
- Colour adjustable, 3000K/ 4000K/ 5700K
- Powered by Tridonic LED drivers
- Hinged gear tray, rear/end conduit entries, BESA compatibility, and 600mm fixing points.
- Push-fit loop in-loop out terminal block
- DALI2 and DSI dimming
- SwitchDIM
- Three individual integrated push-fit terminals, centrally and at both ends, for fast, tool-free wiring.

Construction: Pressed steel & polycarbonate
Driver: Included
Lamp type: LED

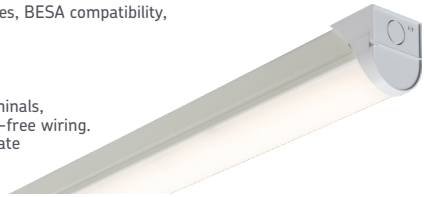

230V 50Hz | IP20 | LAMP INCLUDED | DALI2 | 7 YEAR WARRANTY

Code	Wattage	Model	CCT	Lumens	Dimensions (mm)
BATMCDA4	31W	DALI 4ft	3000/4000/5700K	Up to 4500lm	W: 61 L: 1225 P: 71
BATMCDA5	41W	DALI 5ft	3000/4000/5700K	Up to 6000lm	W: 61 L: 1525 P: 71
BATMCDA6	50W	DALI 6ft	3000/4000/5700K	Up to 7300lm	W: 61 L: 1790 P: 71

NEW

DALI 3W MODULAR EMERGENCY KIT

- For maintained and non-maintained use
- 3-hour Lithium LiFePO4 battery

Construction: Polycarbonate



230V 50Hz | LITHIUM LiFePO4 | 5 YEAR WARRANTY

Code	Function	
MODEMKITDA	3W Modular DALI2 Emergency Kit	NEW

Knightsbridge

INDUSTRIAL **EVOLUTION**



INTRODUCING OUR PREMIUM, TEXTURED-BLACK UPGRADE TO THE METAL CLAD RANGE

OUR METAL CLAD CORE RANGE EXPANDS WITH A TEXTURED MATT BLACK FINISH, DELIVERING MODERN DESIGN AND RELIABLE PERFORMANCE, WITH A DURABLE, POWDER-COATED SURFACE AND MATCHING MATT BLACK METAL ROCKERS



METAL CLAD	FEATURE	PREMIUM METAL CLAD BLACK
×	Sand Textured Finish	✓
×	Metal Rockers	✓
✓	Type C USB	✓
✓	Dual USB Charging	✓
✓	Switched Neons	✓
✓	Modular	✓
✓	Grid	✓
✓	Powder Coated Finish	✓
✓	Multi 20mm knockout points	✓
✓	RCD	✓





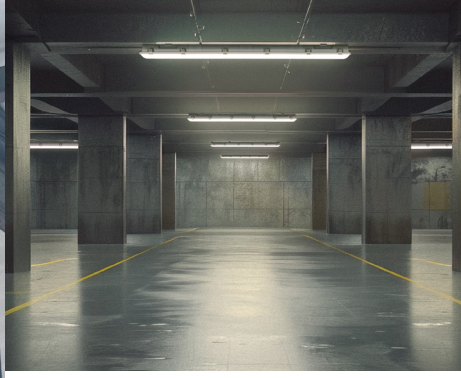

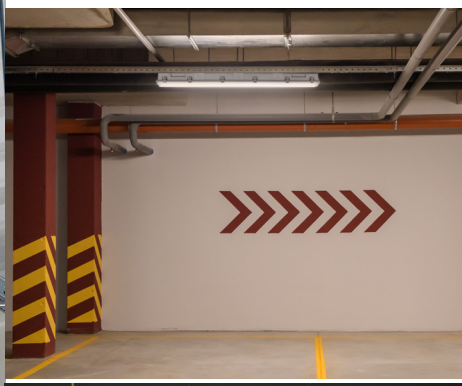



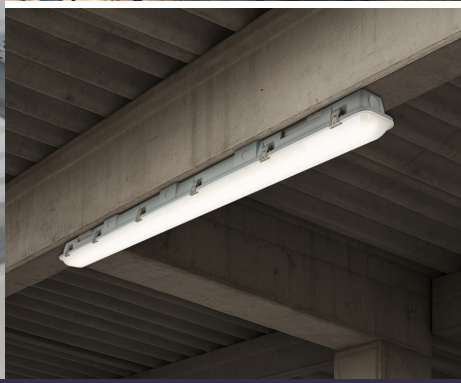

COMMERCIAL LIGHTING

NON-CORROSIVE FITTINGS

The Non-Corrosive range brings the benefits of standard batten luminaires into damp or corrosive atmospheres. High and low bay lighting offers effective high-lumen solutions for large industrial spaces such as warehouses

HELIX MODULAR NON-CORROSIVE FITTING

HELIX One 417

HELIX Swift 418

HELIX Max 419

VIRE CCT TRI-PROOF BATTEN

VIRE CCT Tri-Proof Batten 420

PLUG AND PLAY

HELIX

MODULAR NON-CORROSIVE FITTING



MICROWAVE SENSOR MODULE



EMERGENCY SENSOR MODULE



DETACHABLE TERMINAL BLOCKS



PRE-DRILLED ENDS AND REAR CONDUIT ENTRIES



LONG MOUNTING BRACKET



STAINLESS STEEL CLIP



HELIX ONE

NON-CORROSIVE FITTING



HELIX SWIFT

QUAD WATTAGE TRI CCT NON-CORROSIVE FITTINGS



HELIX MAX

QUAD WATTAGE TRI-CCT FITTING WITH CORRIDOR SENSOR

HELIX ONE MODULAR NON-CORROSIVE FITTING

HELIX ONE is a robust, entry-level modular non-corrosive lighting range, engineered for reliable performance in commercial and industrial environments, both indoors and outdoors. Designed with simplicity and efficiency in mind, it delivers consistent illumination through a single wattage and fixed 4000K CCT - making it an ideal, cost-effective solution where dependable lighting is required.

- Rear, side and end conduit entries
- New body design compatible with BESA box mounting
- Pre-drilled rear and end conduit entries with unique replaceable end caps
- Large bracket fixing point to ease mounting process
- Detachable terminal blocks to ease cable entry points
- Plug and Play Emergency and Sensor modules
  (Sold separately: MODEMKIT2 / MODMWS)

Construction: Polycarbonate
Lamp type: LED



230V 50Hz | IP66 | IK10 | LAMP INCLUDED | 5 YEAR WARRANTY

Code	Wattage	Model	CCT	Lumens	Dimensions (mm)	
HEX2	22W	2ft	4000K	3695lm	L: 665 H: 81 W: 126	NEW
HEX4	22W	4ft	4000K	3730lm	L: 1265 H: 81 W: 95	NEW
HEX5	26W	5ft	4000K	4425lm	L: 1565 H: 81 W: 95	NEW
HEX6	31W	6ft	4000K	5255lm	L: 1865 H: 81 W: 95	NEW

110V-230V HELIX ONE MODULAR NON-CORROSIVE FITTING

- Supplied with 1M cable and IP65 junction box

Construction: Polycarbonate
Lamp type: LED



110V | IP66 | IK10 | LAMP INCLUDED | 5 YEAR WARRANTY

Code	Wattage	Model	CCT	Lumens	Dimensions (mm)	
HEX21	22W	2ft	4000K	3340lm	L: 665 H: 81 W: 126	NEW
HEX51	28W	5ft	4000K	4260lm	L: 1565 H: 81 W: 95	NEW

110V SENSOR AND EMERGENCY KIT

- For maintained and non-maintained use
- 3-hour Lithium LiFePO4 battery

Construction: Polycarbonate



110V | LITHIUM LiFePO4 | 5 YEAR WARRANTY

Code	Function	
MODMWS110	110V Modular Microwave Sensor	NEW
MODEMKIT2110	110V 3W Modular Manual and Self-test Emergency kit	NEW



NEW

HELIX SWIFT MODULAR QUAD WATTAGE NON-CORROSIVE FITTING

HELIX SHIFT is a high-performance modular non-corrosive lighting range, designed for versatility in demanding commercial and industrial applications, indoors and outdoors. Featuring quad wattage and CCT adjustability within a robust, IP66 and IK10-rated construction, it provides adaptable, efficient lighting across a wide range of installations.

- Rear, side and end conduit entries
- New body design compatible with BESA box mounting
- Pre-drilled rear and end conduit entries with unique replaceable end caps
- Large bracket fixing point to ease mounting process
- Detachable terminal blocks to ease cable entry points
- Plug and Play Emergency and Sensor modules

Construction: Polycarbonate
Lamp type: LED

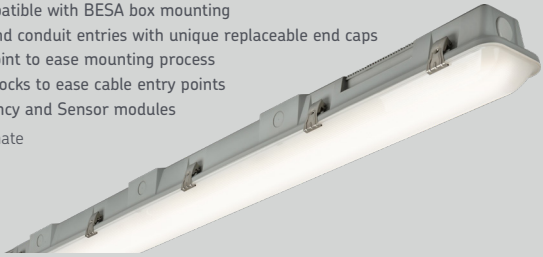

230V 50Hz | IP66 | IK10 | LAMP INCLUDED | QUAD W | TRI CCT | 7 YEAR WARRANTY

Code	Wattage	Model	CCT	Lumens	Dimensions (mm)	
HEXSCW2	13/15/18/22W	2ft CCT Adjustable	3000/4000/5700K	3610lm	L: 665 H: 81 W: 126	NEW
HEXSCW4	22/27/33/39W	4ft CCT Adjustable	3000/4000/5700K	6630lm	L: 1265 H: 81 W: 95	NEW
HEXSCW5	28/34/41/49W	5ft CCT Adjustable	3000/4000/5700K	8340lm	L: 1565 H: 81 W: 95	NEW
HEXSCW6	34/42/51/60W	6ft CCT Adjustable	3000/4000/5700K	10225lm	L: 1865 H: 81 W: 95	NEW

230V MODULAR ACCESSORIES

- Compatible with HELIX ONE, HELIX SHIFT and HELIX MAX
- For maintained and non-maintained use
- 3-hour Lithium LiFePO4 battery
- Fully adjustable detection area, hold time and lux levels

Construction: Polycarbonate





230V 50Hz | DUAL MODE | LITHIUM LiFePO4 | (MODEMKIT2 ONLY) | 5 YEAR WARRANTY

Code	Function	
MODEMKIT2	3W Modular Dual Mode Emergency Kit	NEW
MODMWS	Modular Microwave Sensor	NEW

HELIX MAX MODULAR QUAD WATTAGE TRI CCT NON-CORROSIVE FITTING WITH CORRIDOR SENSOR

HELIX MAX builds on the performance and flexibility of the HELIX platform, incorporating a pre-fitted Corridor sensor with three-step dimming for intelligent, energy-efficient operation. Quad wattage and CCT-adjustable within a durable non-corrosive housing, it is designed for responsive lighting control in commercial and industrial environments, indoors and outdoors.

- Rear, side and end conduit entries
- New body design compatible with BESA box mounting
- Pre-drilled rear and end conduit entries with unique replaceable end caps
- Large bracket fixing point to ease mounting process
- Detachable terminal blocks to ease cable entry points
- Supplied with Corridor Sensor
- Plug and Play Emergency modules available (MODEMKIT2)

Construction: Polycarbonate
Lamp type: LED



230V 50Hz | IP66 | IK10 | LAMP INCLUDED | QUAD W | TRI CCT | CORRIDOR FUNCTION | 7 YEAR WARRANTY

Code	Wattage	Model	CCT	Lumens	Dimensions (mm)	
HEXMCF4	22/27/33/39W	Corridor Sensor	3000/4000/5700K	6640lm	L: 1265 H: 81 W: 95	NEW
HEXMCF5	28/34/41/49W	Corridor Sensor	3000/4000/5700K	8335lm	L: 1565 H: 81 W: 95	NEW
HEXMCF6	30/42/51/60W	Corridor Sensor	3000/4000/5700K	10280lm	L: 1865 H: 81 W: 95	NEW

20MM CONDUIT PIR SENSOR & SENSOR PROGRAMMING REMOTE

- Internal and external use
- Hold-on Time: 5 sec to 30 min
- Ambient Light Threshold (lux): 5 to 150lux / Disable
- 120° detection angle

SENSOR PROGRAMMING REMOTE

- Compatible with OS021PIR and HELIX Corridor Non-Corrosives
- Features include; on/off, hold time, sensitivity, daylight threshold and test functionality.





230V 50Hz | IP65 | 2 YEAR WARRANTY

(OSPIRRE ONLY)

230V 50Hz | 1 YEAR WARRANTY

Code	Model	Range*	Colour	Max. Load	
OS021PIR	Conduit PIR Sensor	4-6m	White	200W LED	NEW
OSPIRRE	Sensor programming remote	-	White	-	NEW

BATTEN MICROWAVE SENSOR

- IP65 pre-wired microwave sensor
- Ideal for battens or non-corrosives with 20mm conduit entry
- Adjustable lux, time, and sensitivity



230V 50Hz | IP65 | 3 YEAR WARRANTY

Code	Function	Range*	Max. Load	Colour
OS021	Adjustable Lux / Adjustable Time (5s - 30mins)	4-6m	400W LED	White



VIRE CCT TRI-PROOF BATTEN

VIRE is a high-performance batten designed to boost reliability,streamline projects, and deliver long-lasting value in any environment. Its innovative twist-and-lock end cap connects directly to a terminal block, enabling quick and easy installation with minimal effort. This design not only saves time on site but also ensures a secure, hassle-free connection every time.

- IP65, making it suitable for both indoor and outdoor use
- IK08, can withstand physical shocks and impacts, enhancing their longevity
- Non-corrosive, ideal for use in harsh humid environments
- Through-wiring, up to 800W
- Simple mounting with easy-fix brackets
- Tool-less cable termination
- Colour adjustable, 3000K/ 4000K/ 5700K

Construction: Polycarbonate

Driver: Integral

Lamp type: SMD LED





Code	Wattage	Model	CCT	Lumens	Dimensions (mm)
VIRE2	10W	2ft	3000/4000/5700K	Up to 1200lm	W: 67 L: 630 H: 72
VIRE4	20W	4ft	3000/4000/5700K	Up to 2600lm	W: 67 L: 1120 H: 72
VIRE5	30W	5ft	3000/4000/5700K	Up to 3700lm	W: 67 L: 1520 P: 72

Knightsbridge

SCREWLESS

SWITCHES AND SOCKETS



ANTHRACITE | ANTIQUE BRASS | BRUSHED CHROME | BLACK NICKEL | MATT BLACK | MATT WHITE | POLISHED BRASS | POLISHED CHROME | SMOKED BRONZE

THE KNIGHTSBRIDGE SCREWLESS RANGE IS AVAILABLE IN NINE DIFFERENT FINISHES







COMMERCIAL LIGHTING

HIGH & LOW BAYS

The Non-Corrosive range brings the benefits of standard batten luminaires into damp or corrosive atmospheres. High and low bay lighting offers effective high-lumen solutions for large industrial spaces such as warehouses

POTENTIA Tri-Wattage, Dual-CCT High Bay 424

LED Low Bay | LED Low Bay Accessories 425

POTENTIA TRI-WATTAGE, DUAL-CCT HIGH BAY

- 4000K/5000K selectable CCT
- Selectable wattage
- Lumileds SMD LEDs
- 90° beam angle with optional 60° lens available separately
- Microwave sensor and DALI control modules available separately
- 0-10V dimmable as standard

Construction: Die-cast aluminium

Driver: Included
Lamp type: SMD LED
Beam angle: 90°







Code	Wattage	CCT	Lumens	Dimensions (mm)
POTHB1	100/120/150W	4000/5000K	Up to 20500lm	Ø: 280 H: 146
POTHB2	150/180/200W	4000/5000K	Up to 27800lm	Ø: 340 H: 146

POTENTIA LENS ACCESSORY

- Lens accessory for POTENTIA High Bay
- Creates 60° light output
- Enables the higher mounting of fixtures



Code	Model	Dimensions (mm)
POTHB1L60	60° Lens Accessory for the POTHB1	Ø: 213
POTHB2L60	60° Lens Accessory for the POTHB2	Ø: 267

ACCESSORIES



Code	Model
POTHB1BRAC	Surface Mounted Bracket for the POTHB1
POTHB2BRAC	Surface Mounted Bracket for the POTHB2
POTHBDALI	DALI Control Module for the POTHB range
POTHBMS	Microwave sensor for the POTHB range
POTHBRC	Programming Remote Control for POTHBMS



LED LOW BAY

- Highly efficient - up to 140lm/W
- Low profile
- Ideal for commercial and industrial lighting
- Supplied as standard with 0-10V dimmable driver (0-10V dimmer is required) and suspension hooks and chains
- Range of accessories available

Construction: Pressed steel
Driver: Integral
Lamp type: LED
Beam angle: 85°





Code	Wattage	CCT	Lumens	Dimensions (mm)
LWB90	90W	5500K	12800lm	W: 325 L: 630 P: 53
LWB165	165W	5500K	23220lm	W: 325 L: 630 P: 53

LOW BAY ACCESSORIES

Code	Model
LWBEMKIT	Emergency Kit
LWBMIC	360° Microwave Dimming Sensor
LWBMOU	Surface Mount Brackets
LWBPIR	360° PIR Sensor

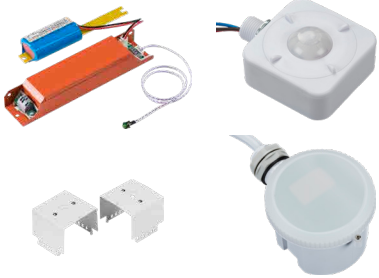











EMERGENCY

A comprehensive range of emergency floodlights, bulkheads, exit signs, downlights, and emergency kits to help ensure a safe premises. The range includes products with self-test facilities

Emergency Floodlights	429
Emergency Bulkheads	430 - 431
Exit Signs | Legends	432 - 433
Dual Mount Exit Signs	434
Suspended Exit Signs | Recessed Exit Signs | Legends	435
Emergency Downlights	436 - 438
Emergency Kits	439



Knightsbridge

SELF-TEST

AUTO SELF-TEST

WHAT IS SELF-TEST?

The self-test feature is built into each product and conducts routine functional and duration testing in accordance with the relevant standards, obviating the need for costly manual testing and intervention other than to record and rectify faults.

WHAT ARE THE BENEFITS?

Self-test lighting offers convenience, compliance, cost savings, and ease of fault identification. With no requirement to isolate the mains supply to test, there is no disruption to the normal working day and no loss of productivity.

HOW DOES IT WORK?

After installation and an initial 24-hour charging period, the product conducts its own self-test operation. This comprises of a 3-hour duration test, after which a 30-second 'monthly' function test is carried out every 28 days, and then yearly another 3-hour duration test. Following each self-test sequence, the unit will revert into charging mode.

The unit's status and any fault modes are shown by the bi-colour LED indicator and manual initiation of the testing procedure is also possible should it be required.



EMPOWERSTL



EMXSTL



EMLED5L



NOT ALL BATTERIES ARE EQUAL

NEXT LEVEL TECHNOLOGY

Our commitment to quality shines through in this upgrade. LiFePO4 batteries are not only lightweight, but also boast higher energy densities, ensuring a longer EM duration. Meeting and exceeding the legal requirement of 3 hours for EM duration, Knightsbridge EM products provide peace of mind and reliability.

LiFePO4 batteries are renowned for their stability in standby applications and offer an impressive lifespan when properly managed.

This translates to significant maintenance savings, reduced energy consumption, carbon footprint reductions, and an overall reduction in total cost of ownership. Elevate your EM solutions with our LiFePO4-powered products, backed by quality and performance.

LiFePO4



LED EMERGENCY FLOODLIGHT

- Constructed from durable lightweight polycarbonate
- Replacement for traditional twin halogen units
- Long life, high lumen, low-maintenance
- Suitable for non-maintained use only
- Lithium LiFePO4 battery

Construction: Polycarbonate
Lamp type: LED



230V 50Hz | IP20 | LAMP INCLUDED | 3 YEAR WARRANTY

Code	Wattage	Model	CCT	Em Lumens	Dimensions (mm)
EMTWINLPC	6W	Manual	6000K	440lm	H: 270 W: 273 P: 70

LED EMERGENCY FLOODLIGHT

- Robust lightweight polycarbonate case and spotlights
- High lumen output
- Suitable for non-maintained use only
- **EMTWINLIP** - Lithium LiFePO4 battery
- **EMTWINST** ONLY: self-test facility

Construction: Polycarbonate
Lamp type: LED



230V 50Hz | IP65 | LAMP INCLUDED | 3 YEAR WARRANTY | AUTO SELF-TEST

*EMTWINST only

Code	Wattage	Model	CCT	Em Lumens	Dimensions (mm)
EMTWINLIP	6W	Manual	6000K	480lm	H: 301 W: 280 P: 90
EMTWINST	6W	Self-test	6000K	480lm	H: 301 W: 280 P: 90

3W LED EMERGENCY BULKHEAD

- Hinged gear tray for ease of installation
- Legend kit included
- Suitable for maintained or non-maintained use
- Lithium LiFePO4 battery

Construction: Polycarbonate
Lamp type: LED





Code	Wattage	Model	CCT	Lumens	Em Lumens	Dimensions (mm)
EMLED4L	3W	Manual	5500K	125lm	125lm	L: 350 W: 117 P: 60

6W LED EMERGENCY BULKHEAD

- Hinged gear tray for ease of installation
- Legend kit included
- Suitable for maintained or non-maintained use
- Lithium LiFePO4 battery

Construction: Polycarbonate
Lamp type: LED





Code	Wattage	Model	CCT	Lumens	Em Lumens	Dimensions (mm)
EMLED1L	6W	Manual	6000K	490lm	260 lm	L: 345 W: 107 P: 76

4W LED EMERGENCY BULKHEAD

- Hinged gear tray for ease of installation
- Legend kit included
- Suitable for maintained or non-maintained use
- Lithium LiFePO4 battery

Construction: Polycarbonate
Lamp type: LED





Code	Wattage	Model	CCT	Lumens	Em Lumens	Dimensions (mm)
EMLED3L	4W	Manual	6000K	175lm	165lm	L: 350 W: 110 P: 60

NEW

3W COMPACT LED EMERGENCY BULKHEAD

- 40% smaller than the standard emergency luminaire
- Hinged gear tray for ease of installation
- Legend kit, opal and prismatic diffuser included
- Suitable for maintained or non-maintained use

Construction: Polycarbonate
Lamp type: LED



230V 50Hz | IP65 | LAMP INCLUDED | 3 YEAR WARRANTY

Code	Wattage	Model	CCT	Lumens	Em Lumens	Dimensions (mm)	
EMLED2AL	3W	Manual	6000K	150lm	150lm	H: 97 L: 216 P: 48	NEW

4W LED EMERGENCY SELF-TEST BULKHEAD

- Self-test facility in accordance with EN 62034, ensuring periodic testing at pre-programmed intervals
- Suitable for maintained or non-maintained use
- Low maintenance
- Lithium LiFePO4 battery

Construction: Polycarbonate
Lamp type: LED

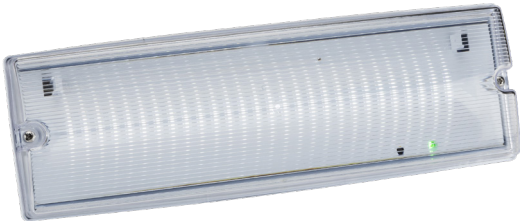

230V 50Hz | IP65 | LAMP INCLUDED | 3 YEAR WARRANTY | AUTO SELF-TEST

Code	Wattage	Model	CCT	Lumens	Em Lumens	Dimensions (mm)
EMLED5L	4W	Self-test	6000K	170lm	165lm	L: 350 W: 110 P: 60



WALL MOUNTED LED EXIT SIGN AND LEGENDS

- Lightweight wall mounted metal frame with polycarbonate legends
- Supplied as standard with arrow up - alternative legends available
- Suitable for maintained or non-maintained use

Construction: Pressed steel
Lamp type: LED





Code	Wattage	Model	CCT	Lumens	Em Lumens	Dimensions (mm)
EMRUN	6W	Manual	6000K	105lm	50lm	H: 190 W: 390 P: 60

LEGENDS

Code	Model
EMRUND	Down Legend
EMRUNL	Left Legend
EMRUNR	Right Legend
EMRUNU	Up Legend



WALL MOUNTED SELF-TEST EXIT SIGN AND LEGENDS

- Self-test facility in accordance with EN 62034
- Lightweight, durable polycarbonate with interchangeable legends
- Supplied with arrow up, alternative down and left/right legends included
- Suitable for maintained or non-maintained use
- Lithium LiFePO4 battery

Construction: Polycarbonate
Lamp type: LED





Code	Wattage	Model	CCT	Lumens	Em Lumens	Dimensions (mm)
EMRNSTL	4W	Self-Test	6000K	150lm	120lm	H: 169 L: 324 P: 42

SUSPENDED LED EXIT SIGN AND LEGENDS

- Supplied as standard with arrow up - alternative legends available
- Suitable for maintained or non-maintained use
- Comes with 1.5m suspension kit terminating in aluminium ceiling plate

Construction: Aluminium
Lamp type: LED



230V 50Hz | IP20 | LAMP INCLUDED | 3 YEAR WARRANTY

Code	Wattage	Model	CCT	Lumens	Em Lumens	Dimensions (mm)
EMSWING	4W	3-Hour	6000K	70lm	34lm	H: 222 W: 25 L: 332

LEGENDS

Code	Model
EMSWINGD	Down Legend
EMSWINGLR	Left/Right Legend



NEW

MULTI-MOUNT LED EMERGENCY EXIT SIGN WITH ROTATABLE LEGENDS

- Manual Emergency or Self-test emergency, changeable via a switch
- Suitable for wall and ceiling mounting
- Accessories included to mount it recessed or suspended.

Construction: Aluminium
Lamp type: LED





230V 50Hz | IP20 | LAMP INCLUDED | LITHIUM LiFePO4 | DUAL MODE | 3 YEAR WARRANTY

* EMEXIT2 ONLY

Code	Wattage	Model	CCT	Lumens	Em Lumens	Dimensions (mm)	
EMEXIT2	3W	Dual Mode	6500K	60lm	40lm	H: 173 W: 45 L: 264	NEW
EMEXIT2DA	3W	DALI2	6500K	60lm	40lm	H: 173 W: 45 L: 264	NEW



DUAL MOUNTING LED EXIT SIGN

- Lightweight, wall or ceiling mounted
- Supplied as standard with arrow up - alternative legends available
- Suitable for maintained or non-maintained use (not switched maintained)
- Lithium LiFePO4 battery
- **EMXSTL** ONLY: Self-test facility

Construction: Polycarbonate
Lamp type: LED

230V 50Hz | IP20 | LAMP INCLUDED | 3 YEAR WARRANTY | AUTO SELF-TEST

* EMXSTL ONLY



Code	Wattage	Model	CCT	Lumens	Em Lumens	Dimensions (mm)	
EMEXITL	4W	Manual	6000K	90lm	48lm	H: 230 L: 310 P: 44	
EMEXITLBK	4W	Manual	6000K	90lm	48lm	H: 230 L: 310 P: 44	NEW
EMXSTL	4W	Self-Test	6000K	40lm	10.5lm	H: 230 L: 310 P: 44	

SUSPENDED LED EXIT SIGN

- Lightweight suspendable ceiling mounted LED exit sign
- Polycarbonate legends, supplied as standard with arrow up - alternative legends available
- For maintained or non-maintained use (not switched maintained)
- Lithium LiFePO4 battery

Construction: Polycarbonate
Lamp type: LED





Code	Wattage	Model	CCT	Lumens	Em Lumens	Dimensions (mm)
EMLSUSL	2W	Manual	6000K	15lm	8lm	H: 185 W: 45 L: 300

RECESSED LED EXIT SIGN

- Polycarbonate legends, supplied as standard with arrow up - alternative legends available
- For maintained or non-maintained use (not switched maintained)
- Lithium LiFePO4 battery

Construction: Polycarbonate
Lamp type: LED





Code	Wattage	Model	CCT	Lumens	Em Lumens	Dimensions (mm)
EMLRECL	2W	Manual	6000K	15lm	8lm	W: 76 L: 335 P: 170

LEGENDS

Code	Model
EMEXITL2	Up Legend
EMEXITL3	Down Legend
EMEXITLR	Left/Right Legend

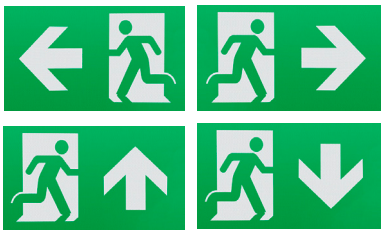

RECESSED LED EMERGENCY DOWNLIGHT

- Lithium LiFePO4 battery
- Suitable for non-maintained use only
- Aluminium, white, and black bezels included

Construction: Die-cast aluminium & polycarbonate
Lamp type: LED



230V 50Hz | IP20 | LAMP INCLUDED | 3 YEAR WARRANTY

Code	Wattage	Model	CCT	Em Lumens	Cut-out (mm)	Dimensions (mm)	Min. Void (mm)
EMPOWER3	3W	Manual	6000K	120lm	Ø: 34	Ø: 42	125

SELF-TEST RECESSED LED EMERGENCY DOWNLIGHT

- Aluminium body with aluminium, white, and black bezels
- Green LED indicates when downlight is in charging mode
- Supplied pre-wired
- Inverter and battery pack included
- Suitable for non-maintained use only
- Lithium LiFePO4 battery

Construction: Die-cast aluminium & polycarbonate
Lamp type: LED



230V 50Hz | IP20 | LAMP INCLUDED | 3 YEAR WARRANTY | AUTO SELF-TEST

Code	Wattage	Model	CCT	Em Lumens	Cut-out (mm)	Dimensions (mm)	Min. Void (mm)
EMPOWERSTL	3W	Self-Test	6000K	125lm	Ø: 34	Ø: 42	75

HIGH LUMEN RECESSED LED EMERGENCY DOWNLIGHT

- Pre-wired battery pack for ease of installation
- Ideal for corridors, stairwells, and a variety of commercial and public areas
- Suitable for non-maintained use only
- Lithium LiFePO4 battery

Construction: Die-cast aluminium & polycarbonate
Lamp type: LED



230V 50Hz | IP20 | LAMP INCLUDED | 3 YEAR WARRANTY

Code	Wattage	Model	CCT	Em Lumens	Cut-out (mm)	Dimensions (mm)	Min. Void (mm)
ENM5C	5W	Manual	5500K	460lm	Ø: 65	Ø: 85	110



3.5W LED EMERGENCY DOWNLIGHT (maintained/non-maintained use)

- Comes with a separate green LED charge indicator
- Pre-wired battery pack for ease of installation
- Maintained or non-maintained use options
- Manual and self-test emergency
- Lithium LiFePO4 battery
- Corridor lens accessory included in the box

Construction: Polycarbonate
Lamp type: LED

230V 50Hz | IP20 | LAMP INCLUDED | 5 YEAR WARRANTY | AUTO SELF-TEST

* EMPOWERXXST





Code	Wattage	Model	Finish	CCT	Em Lumens	Cut-out (mm)	Dimensions (mm)	Min. Void (mm)
EMPOWER4	3.5W	Manual	White	5500K	140lm	Ø: 45	Ø: 60	80
EMPOWER4W	3.5W	Manual	White	3000K	130lm	Ø: 45	Ø: 60	80
EMPOWER4ST	3.5W	Self-test	White	5500K	140lm	Ø: 45	Ø: 60	80
EMPOWER4WST	3.5W	Self-test	White	3000K	130lm	Ø: 45	Ø: 60	80
EMPOWER4BK	3.5W	Manual	Black	5500K	140lm	Ø: 45	Ø: 60	80

LED SURFACE EMERGENCY DOWNLIGHT

- Non-maintained use
- Open area and corridor lenses included
- Surface mounted
- 2 x 20mm conduit entries
- Push-fit loop-in-loop-out terminal block
- Lithium LiFePO4 battery

Construction: Polycarbonate
Lamp type: LED



230V 50Hz | IP20 | LAMP INCLUDED | 3 YEAR WARRANTY

Code	Wattage	Model	Finish	CCT	Em Lumens	Dimensions (mm)
EMSUR2	3W	Manual	White	5000K	150lm	L: 110 H: 46 W: 110
EMSUR2BK	3W	Manual	Black	5000K	150lm	L: 110 H: 46 W: 110

NEW

ADAPTABLE EMERGENCY LED DOWNLIGHT

- Slimline, low-profile design, supplied with hole converter for ease of use
- Adjustable trim with two cut-out diameters
- Inverter and battery pack included
- Manual test button
- Suitable for non-maintained use only
- Lithium LiFePO4 battery

Construction: Polycarbonate
Lamp type: LED



230V 50Hz | IP20 | LAMP INCLUDED | 3 YEAR WARRANTY

Code	Wattage	Model	Finish	CCT	Em Lumens	Cut-out (mm)	Dimensions (mm)	Min. Void (mm)	
EMPDL1	3W	Manual	White	5700K	110lm	Ø: 70-130	Ø: 140	80	NEW

DOWNLIGHT EMERGENCY KIT

- Compatible with CPLCW Panels
- Inverter and battery pack included
- Pre-wired with easy-fix connectors and LED charge indicator
- CPLCW luminaire not included

Construction: Polycarbonate



230V 50Hz | IP20 | 3 YEAR WARRANTY

Code	Wattage	Model	Dimensions (mm)
CPLEM	5.5W	Manual	H: 24 W: 34 L: 211

LED 3-HOUR EMERGENCY KIT

- Output 9 - 48V, 100mA
- Maximum luminaire load of 50W
- Maintained and non-maintained use
- Suitable for use with Knightsbridge products. Please view the product information on our website for a full listing of compatible luminaires
- Lithium LiFePO4 battery

Construction: Polycarbonate



230V 50Hz | IP20 | DUAL MODE | 3 YEAR WARRANTY

Code	Wattage	Model	Dimensions (mm)	
EMKIT2LSM	50W	LED Dual Mode Emergency Kit	H: 32 W: 59 L: 203	NEW

DALI LiFePO4 BATTERY LED EMERGENCY PACK

- Output 9 - 48V, 75mA
- Maximum luminaire load of 50W
- Maintained and non-maintained use
- Suitable for use with Knightsbridge products. Please view the product information on our website for a full listing of compatible luminaires
- Lithium LiFePO4 battery

Construction: Polycarbonate



230V 50Hz | IP20 | 3 YEAR WARRANTY

Code	Wattage	Model	Dimensions (mm)	
EMKIT2DA	50W	230V DALI Emergency Kit	H: 32 W: 59 L: 203	NEW

GU10 LED EMERGENCY KIT

- Suitable with GU10 lamp up to maximum of 7W*
- Contains inverter and battery pack within a protective casing
- Pre-wired with easy-fix connectors and LED charge indicator
- Maintained and non-maintained use
- 3-hour emergency duration
- Non-dimmable

Construction: Polycarbonate
Lamp type: GU10 LED (7W max.)



230V 50Hz | IP20 | 3 YEAR WARRANTY

Code	Wattage	Model	Min. Cut-out (mm)	
EMGUKIT3	7W	LED Emergency Kit	Ø: 55	NEW











LAMPS & LIGHTING ACCESSORIES

The everyday lighting essentials including lamps, drivers, fuses, screws, and more

LUMINA Retrofit LED Module	442
T8 LED Tubes | E27 & E40 Corn Lamps	443
LED GU10 Lamps	444
G4/G9 Base LED Capsule Lamps	445
Decorative Filament Lamps	446
Pendant Sets	447
VELOX 20A Connector | Waterproof Junction Box | Transformer | LED Drivers	448 - 450
Lamp Accessories	451

REPLACE TRADITIONAL GU10 LAMPS WITH **A STATE OF THE ART MODERN SOLUTION**



LUMINA RETROFIT LED MODULE WITH TRI-COLOUR AND DUAL WATTAGE

- Selectable colour temperature, 3000K, 4000K, 5500K
- Selectable wattage 6/8W and 10/12W
- Plug and play driver allowing ease of installation, with loop-in-loop-out capability
- CRI90
- EM conversion kit available

Construction: Aluminium
Driver: Included
Lamp type: LED

230V 50Hz | IP20 | TRI WATTAGE | 5 YEAR WARRANTY





COMPATIBLE WITH EMKIT2LSM

Code	Wattage	CCT	Lumens	Dimensions (mm)
LUM40	6/8W	3000/4000/5500K	Up to 780lm	Ø: 50 H:40
LUM70	10/12W	3000/4000/5500K	Up to 1055lm	Ø: 50 H:70

T8 LED TUBES

- Alternative to classic T8 fluorescent lamps
- Up to 130lm/W
- Instant ignition provides uniform illumination
- Integral driver for ease of installation
- Not for use with external electronic or magnetic ballasts

Lamp type: LED



230V 50Hz

2 YEAR WARRANTY

Code	Wattage	Model	Construction	CCT	Lumens	Dimensions (mm)	Qty
T8LEDP9CW	9W	2ft	Glass	4000K	1090lm	L: 603 Ø: 27	4
T8LEDP9DL	9W	2ft	Glass	6000K	1080lm	L: 603 Ø: 27	4
T8LEDP18CW	18W	4ft	Glass	4000K	2295lm	L: 1212 Ø: 27	4
T8LEDP18DL	18W	4ft	Glass	6000K	2230lm	L: 1212 Ø: 27	4
T8LEDP24CW	24W	5ft	Glass	4000K	2980lm	L: 1512 Ø: 27	4
T8LEDP24DL	24W	5ft	Glass	6000K	2895lm	L: 1512 Ø: 27	4
T8LED6	30W	6ft	Polycarbonate	4000K	3350lm	L: 1778 Ø: 26	1
T8LED6D	30W	6ft	Polycarbonate	6000K	3400lm	L: 1778 Ø: 26	1

E27 / E40 CORN LAMPS

- Suitable for indoor use or enclosed outdoor luminaires
- Integral cooling system maximising LED operation
- Suitable for open and closed fixtures
- 360° light distribution

Construction: Polycarbonate
Lamp type: LED
Beam angle: 260°-280°



230V 50Hz

IP20

5 YEAR WARRANTY

Code	Wattage	Lamp Base	CCT	Lumens	Dimensions (mm)
CRN12CW	12W	E27	4000K	1695lm	H: 128 Ø: 60
CRN18CW	18W	E27	4000K	2495lm	H: 148 Ø: 60
CRN27CW	27W	E27	4000K	3750lm	H: 173 Ø: 60
CRN36CW	36W	E40	4000K	5115lm	H: 216 Ø: 85
CRN54CW	54W	E40	4000K	6870lm	H: 255 Ø: 85

GU10 LED GLASS DIMMABLE LAMP

Construction: Glass & polycarbonate
Lamp type: LED
Beam angle: 40°



230V 50Hz

3 YEAR WARRANTY

Code	Wattage	CCT	Lumens	Dimensions (mm)	Qty
G5DWW	5W	2700K	500lm	Ø: 50 H:52	10
G5DCW	5W	4000K	570lm	Ø: 50 H:52	10

GU10 LED DIMMABLE LAMP

Construction: Polycarbonate
Lamp type: LED
Beam angle: 40°



230V 50Hz

3 YEAR WARRANTY

Code	Wattage	CCT	Lumens	Dimensions (mm)	Qty
GU5PDWW	5W	3000K	645lm	Ø: 50 H:54	10
GU5PDCW	5W	4000K	680lm	Ø: 50 H:54	10
GU5PDDL	5W	6500K	665lm	Ø: 50 H:54	10

GU10 LED DIMMABLE LAMP

Construction: Polycarbonate
Lamp type: LED
Beam angle: 36°



230V 50Hz

3 YEAR WARRANTY

Code	Wattage	CCT	Lumens	Dimensions (mm)	Qty
GU7PDWW	7W	3000K	720lm	Ø: 50 H:57	10
GU7PDCW	7W	4000K	755lm	Ø: 50 H:57	10

NEW

GU10 LED NON-DIMMABLE LAMP

Construction: Polycarbonate
Lamp type: LED
Beam angle: 38°

230V 50Hz

3 YEAR WARRANTY



Code	Wattage	CCT	Lumens	Dimensions (mm)	Qty	
GU10B5WW	5W	3000K	460lm	Ø: 50 H:54	100	NEW
GU10B5CW	5W	4000K	460lm	Ø: 50 H:54	100	NEW



G9 BASE LED CAPSULE LAMPS

- Suitable replacement for most G9 halogen lamps
- Dimmable where stated

Lamp type: LED

230V 50Hz

2 YEAR WARRANTY

Code	Wattage	Model	CCT	Lumens	Dimensions (mm)	Qty
G9LED10	2W	Non-Dimmable	2700K	200lm	Ø: 16 H: 43	10
G9LED11	2W	Non-Dimmable	4000K	230lm	Ø: 16 H: 43	10
G9LED16	4W	Dimmable	2700K	390lm	Ø: 19 H: 54	10
G9LED17	4W	Dimmable	4000K	430lm	Ø: 19 H: 54	10
G9LED18	3W	Non-dimmable	2700K	320lm	Ø: 19 H: 54	10
G9LED19	3W	Non-dimmable	4000K	355lm	Ø: 19 H: 54	10

CLEAR / FROSTED CANDLE DIMMABLE LAMP



230V 50Hz

2 YEAR WARRANTY

Code	Wattage	Model	Lamp Type	CCT	Lumens	Dimensions (mm)
CLD4ABCC	4W	Clear	B22d	2700K	485lm	Ø: 35 H: 91
CLD4AESC	4W	Clear	E27	2700K	485lm	Ø: 35 H: 92
CLD4ASESC	4W	Clear	E14	2700K	485lm	Ø: 35 H: 98
CLD4ASESO	4W	Frosted	E14	2700K	470lm	Ø: 35 H: 98

GOLF BALL DIMMABLE LAMP



230V 50Hz

2 YEAR WARRANTY

Code	Wattage	Model	Lamp Type	CCT	Lumens	Dimensions (mm)
GBD4AESC	4W	Clear	E27	2700K	490lm	Ø: 45 H: 76
GBD4ASESC	4W	Clear	E14	2700K	490lm	Ø: 45 H: 78

CLEAR GLS DIMMABLE LAMP



230V 50Hz

2 YEAR WARRANTY

Code	Wattage	Model	Lamp Type	CCT	Lumens	Dimensions (mm)
GLSD8ABCC	8W	Clear	B22d	2700K	1120lm	Ø: 60 H: 104
GLSD8AESC	8W	Clear	E27	2700K	1120lm	Ø: 60 H: 105

NEW

8W GLS NON-DIMMABLE LAMPS



230V 50Hz

2 YEAR WARRANTY

Code	Wattage	Model	Lamp Type	CCT	Lumens	Dimensions (mm)	Qty	
GLSBC8WW	8W	Frosted	B22d	3000K	805lm	Ø: 59 H: 104	50pcs	NEW
GLSBC8CW	8W	Frosted	B22d	4000K	805lm	Ø: 59 H: 105	50pcs	NEW

CONTEMPORARY METAL PENDANT SETS - 6"/1.8M

- 3 Plate format
- Metal finish ceiling rose and lamp holder
- Braided cord flex
- Contemporary styled lamp holder





230V 50Hz

3 YEAR WARRANTY

Code	Size	Model
8270MB	6" T2 E27	Matt Black
8270MW	6" T2 E27	Matt White
8270BC	6" T2 E27	Brushed Chrome
8270PC	6" T2 E27	Polished Chrome
8270BN	6" T2 E27	Black Nickel
8270AB	6" T2 E27	Antique Brass
8270PB	6" T2 E27	Polished Brass
8270AT	6" T2 E27	Anthracite
8270SB	6" T2 E27	Smoked Bronze

Code	Size	Model
8270LMB	1.8m T2 E27	Matt Black
8270LMW	1.8m T2 E27	Matt White
8270LBC	1.8m T2 E27	Brushed Chrome
8270LPC	1.8m T2 E27	Polished Chrome
8270LBN	1.8m T2 E27	Black Nickel
8270LAB	1.8m T2 E27	Antique Brass
8270LPB	1.8m T2 E27	Polished Brass
8270LAT	1.8m T2 E27	Anthracite
8270LSB	1.8m T2 E27	Smoked Bronze

NB: lamps not included

VINTAGE METAL PENDANT SETS - 6"/1.8M

- 3 Plate format
- Metal finish ceiling rose and lamp holder
- Braided cord flex
- Vintage styled lamp holder





230V 50Hz

3 YEAR WARRANTY

Code	Size	Model
8271MB	6" T2 E27	Matt Black
8271MW	6" T2 E27	Matt White
8271BC	6" T2 E27	Brushed Chrome
8271PC	6" T2 E27	Polished Chrome
8271BN	6" T2 E27	Black Nickel
8271AB	6" T2 E27	Antique Brass
8271PB	6" T2 E27	Polished Brass
8271AT	6" T2 E27	Anthracite
8271SB	6" T2 E27	Smoked Bronze

Code	Size	Model
8271LMB	1.8m T2 E27	Matt Black
8271LMW	1.8m T2 E27	Matt White
8271LBC	1.8m T2 E27	Brushed Chrome
8271LPC	1.8m T2 E27	Polished Chrome
8271LBN	1.8m T2 E27	Black Nickel
8271LAB	1.8m T2 E27	Antique Brass
8271LPB	1.8m T2 E27	Polished Brass
8271LAT	1.8m T2 E27	Anthracite
8271LSB	1.8m T2 E27	Smoked Bronze

VELOX 20A LIGHTING CONNECTOR

- Suitable for 1.00mm² to 2.5mm² cables
- Push-fit terminal, maintenance-free
- See-through cover for easy cable inspection
- Large size enables easy loop-in-loop-out wiring

Code	Model	Qty
SN3P	VELOX 20A 3-pin lighting connector	20
SN4P	VELOX 20A 4-pin lighting connector	20



230V 50Hz

1 YEAR WARRANTY

IP68 WATERPROOF JUNCTION BOX

- To be wired in series (refer to diagram)

Code	Model
IP68JBS	Max. Load 48V DC 20W





1 YEAR WARRANTY

TRANSFORMER T02

- Dimmable, thermal overload, and short circuit protection

Code	Model	Dimensions (mm)
T02	20W - 60W	H: 23 W: 30 L: 120m



230V 50Hz

1 YEAR WARRANTY

IP20 12V LED CONSTANT VOLTAGE DRIVERS

- Non-dimmable

Code	Model
12VDCA	12V 12W
12DC40	12V 40W
12DC75	12V 75W



230V 50Hz

1 YEAR WARRANTY

3 YEAR WARRANTY

*12DC75 Only

IP20 24V LED CONSTANT VOLTAGE DRIVERS

- Non-dimmable

Code	Model
24VDCA	24V 12W
24DC40	24V 40W
24DC75	24V 75W



230V 50Hz

1 YEAR WARRANTY

3 YEAR WARRANTY

*24DC75 Only

IP20 24V LED CONSTANT VOLTAGE DRIVERS

- Suitable for 110V / 230V
- With output voltage adjustment
- Non-dimmable

Code	Model
24DC100M	24V IP20 100W DC Driver
24DC150M	24V IP20 150W DC Driver
24DC200M	24V IP20 200W DC Driver





230V 50Hz

3 YEAR WARRANTY

FLAT STRIPLIGHT ESSENTIALS

Code	Model
LEDAD36	36W Power Adaptor - Black



IP20 LED DIMMABLE CONSTANT VOLTAGE DRIVERS

- Compatible with most trailing edge dimmers

Code	Model
12DC25D	24V 50W
12DC50D	12V 50W
24DC25D	24V 25W
24DC50D	24V 50W
24DC100D	24V 100W



230V 50Hz

3 YEAR WARRANTY

IP67 CONSTANT VOLTAGE DRIVERS

- Non-dimmable

Code	Model
12DCIP40P	12V 40W
24DCIP40P	24V 40W
24DCIP60P	24V 75W
24DCIP100P	24V 100W



230V 50Hz

3 YEAR WARRANTY

IP20 CONSTANT CURRENT LED DRIVERS

- Compatible with most trailing edge dimmers (dimmable models)

Code	Model	Output current
350ND19W	2-54V 19W	350mA
1W210DA	12-40V 16.5W	350mA
25W350DA	36-72V 25W	350mA
25W700DA	18-36V 25W	700mA
40W700DA	28-56V 40W	700mA



230V 50Hz

3 YEAR WARRANTY

IP20 ADJUSTABLE CONSTANT CURRENT DALI2 DRIVER

- Switch-dim function
- Open circuit, short circuit and overload protection

Code	Model	Output current
1050DALI45W	25-70V 45W	350/500/600/700/800 /900/1050mA



230V 50Hz

5 YEAR WARRANTY

RUBBER SUCTION CUP

- For easy changing of GU10 lamps

Code	Model	Qty
LSC1	Rubber Suction Cup	10



1 YEAR WARRANTY

SPRING CLIPS FOR LOW VOLTAGE FITTINGS

Code	Model	Qty
LVC1	50mm	100



1 YEAR WARRANTY

LAMP HOLDERS

Code	Model	Qty
LH01	Low Voltage with 180mm Silicon Cable	50
LH02	GU10 with 260mm Silicon Cable	50
LH03	GU10 with Bridge and separate Earth Terminal	50



1 YEAR WARRANTY

STRIP CONNECTORS

- 380V terminal strips for connecting electrical cable
- 12-Way terminal block
- Made with PA66 material (UL94-V2 self-extinguishing) EN 60947, operating temperature: -30°C to + 110°C

Code	Model	Qty
SC3PA	3A	10
SC15PA	15A	10
SC30PA	30A	10



1 YEAR WARRANTY









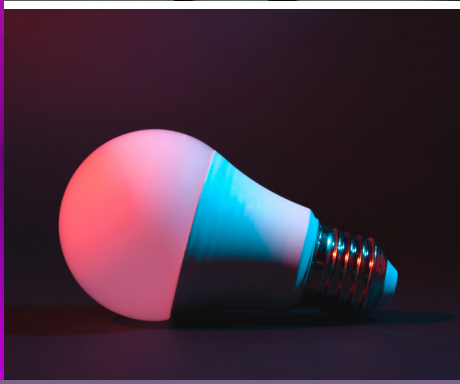

SMART HOME

Smart lighting and wiring accessories that are easy to control via the Smart Life app

Smart Switched Socket	16A SMART PLUG	456
IP66 Smart Outdoor Switched Socket	457
Smart LED Flex Controller	SpektroLED® Smart Downlights	458
Smart Lamps	459


LAMPS
DOWNLIGHTS
SOCKETS
OUTDOOR SOCKET

EASY FOR THE USER, SIMPLE FOR THE INSTALLER

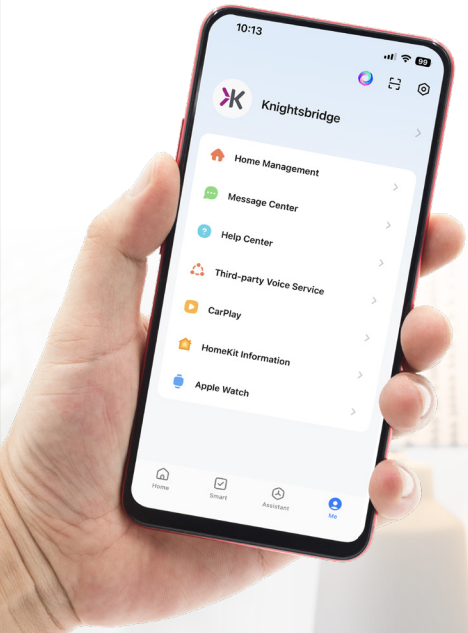

With Knightsbridge, creating a smart home has never been easier.

Our smart range is designed to work seamlessly with the Smart Life app, allowing users to control their connected devices from their smartphone or tablet. Features such as on/off control, dimming and colour adjustment are available across compatible products, offering greater convenience and flexibility in everyday living.

For full details on each product's specific functions, please refer to the individual product listings in this section or visit our website.

works with Smart Life



NO HUB REQUIRED

Products connect directly via Wi-Fi enabling global remote access.

No space and money wasted on additional hubs / gateway devices



TIMERS

Set up schedules within the home using the timer function to automate when devices turn on/off.



VOICE CONTROL

Voice control works with *Hey Google* or *Amazon Alexa*



GEOFENCING

Don't come home to darkness; program lights to automatically turn on/off based on your GPS location



SCENES

Utilise preset scenes such as 'Movie', or create your own.



SECURITY

Instant security alerts to your mobile device

Download **Add Device** **Enjoy**

Our smart products are designed for easy installation, with features such as push-fit terminals on downlights and retrofit capabilities on smart sockets



13A 2G SMART SWITCHED SOCKET

- Control up to 2 appliances
- Manually override by using the switches on the socket
- Power monitoring function
- White moulded designs with antimicrobial properties
- Minimum mounting box depth: 25-35mm (dependent on wiring conditions)
- See pages 6 and 16 for full technical product breakdowns

230V 50Hz | IP20 | WI-FI | POWER MONITORING KWh | 2 YEAR WARRANTY





Code	Model
SN9KW	Square Edge
CU9KW	Curved Edge

ALSO AVAILABLE AS A REMOTE CONTROLLED SOCKET. SEE PAGE 22





NO HUB REQUIRED



TIMERS



VOICE CONTROL



GEOFENCING



IP66 2G SMART OUTDOOR SWITCHED SOCKET

- Controls up to 2 outdoor appliances
- Manually override by using the switch on the socket
- Rugged outdoor enclosure
- Range: 20m-40m (depending on Wi-Fi signal coverage)
- Multiple 20mm cable access points
- Padlock ready, securable lid
- Transparent casing. Lid holds open when required for ease of use
- Power monitoring feature

230V 50Hz | IP66 | IK06 | WI-FI | POWER MONITORING KWh | 2 YEAR WARRANTY



Code	Model
OP9KW	IP66 2G Outdoor Switched Socket



NO HUB REQUIRED



TIMERS



VOICE CONTROL



GEOFENCING

SMART LED FLEX CONTROLLER

- Compatible with single colour, CCT, RGB, and RGBW flex
- Enables users to adjust the colour temperature of their LED flex via Smart Life app
- RGB and RGBW LED flex only: enables users to adjust the RGB colour via Smart Life app



2 YEAR WARRANTY

Code	Model
LEDFWIFI	12V / 24V

*LED strip lighting not included

FOR FULL LED FLEX RANGE, SEE PAGES 294-307



SPEKTROLED® EVO SMART DOWNLIGHT

- 230V direct to fixture with loop in-loop out first and second fix connectors
- RGB and CCT adjustable via Smart Life app
- CCT adjustable 3000K - 6000K
- Wi-Fi Connectivity IEEE 802.11 b/g/n (2.4Ghz only)
- Complete with white bezel as standard
- Additional 5 colourways of interchangeable bezels available (Matt Black, Polished Chrome, Brushed Chrome, Brushed Brass and Antique Brass)
- Complies with the latest energy efficiency standards
- Fire-rated - 30/60/90min solid timber, 30min web joist and 30min i-joist (staircraft)
- IC rated (insulation contact)*
- Acoustic rated ISO 10140-2:2010
- Dimmable**

Construction: Pressed steel
Driver: Integral
Lamp type: SMD LED
Beam angle: 60°



230V 50Hz

IP20 IP65

VIA APP ONLY

LAMP INCLUDED

IC* RATED

5 YEAR WARRANTY



Code	Wattage	Colour	CCT	Lumens	Cut-out (mm)	Dimensions (mm)	Min. Void (mm)	Recessed Depth (mm)
SPKEVFKRGBW	8W	RGB+CCT Adjustable	3000-6000K	Up to 855lm	Ø: 70	Ø: 90.5 P: 6	43	43

* With mineral wool style insulation only, please see page 241 and product instructions for more information
** Via app only





NO HUB REQUIRED



TIMERS



VOICE CONTROL



GEOFENCING



SCENES



SMART LED RGB & CCT LAMPS

Construction: Polycarbonate
Lamp type: LED

230V 50Hz

VIA APP ONLY

2 YEAR WARRANTY



Code	Wattage	Lamp Base	Colour	CCT	Lumens
GLS9ESKW	9W	E27	RGB+CCT	2700-6500K	Up to 900lm
GLS9BCKW	9W	B22d	RGB+CCT	2700-6500K	Up to 900lm
CL5KW	5W	E14	RGB+CCT	2700-6500K	Up to 440lm
GU5KWB	4.5W	GU10	RGB+CCT	2700-6500K	Up to 435lm



NO HUB REQUIRED



TIMERS



VOICE CONTROL



GEOFENCING



SCENES

GLOSSARY



Voltage


Class I


Class II


Class III


Dimmable



0 - 10V



Dimmable
- Lamp Dependent


Non-Dimmable



Ingress Protection



Impact Rating



Insulation Coverable



Fire-rated



Lamp Included



Lamp Not Included



Magnetic Bezels



Lithium LiFePO4
Battery



Years Warranty



Made from TP(a)
Rated material



Glare Rating



Acoustic tested



Self-Test / Manual
emergency testing



Plug and Play
modules

Important information

E&OE. The information supplied in this catalogue is representative of general models.
All information and suggestions given are advisory and should be checked and confirmed prior to any installation procedures. It is the installer's responsibility to confirm the suitability of all the products included in this catalogue.

Knightsbridge reserves the right to make any modification necessary to parts or details without prior notice.

The material in this catalogue does not form any part of a contract with Knightsbridge.
Any products supplied are done so in full compliance with our general terms and conditions of sale (available in full at mlaccessories.co.uk).

INDEX

Code No.	Catalogue Section	Qty	Page
1350	WIRING BASICS	10	201
1375	WIRING BASICS	10	201
8910	WIRING BASICS	20	201
1050DALI45W	LAMPS & LIGHTING ACCESSORIES	1	450
12DC25D	LAMPS & LIGHTING ACCESSORIES	1	304,450
12DC40	LAMPS & LIGHTING ACCESSORIES	1	303,449
12DC50D	LAMPS & LIGHTING ACCESSORIES	1	304,450
12DC75	LAMPS & LIGHTING ACCESSORIES	1	303,449
12DCIP40P	LAMPS & LIGHTING ACCESSORIES	1	450
12GTOWER	WIRING BASICS	1	201
12VDCA	LAMPS & LIGHTING ACCESSORIES	1	303,449
1GHALO	WIRING BASICS	1	25,48,64,80,106
1GSBBC	WIRING BASICS	1	192
1GSBBK	WIRING BASICS	1	192
1GSBGY	WIRING BASICS	1	192
1GSBPC	WIRING BASICS	1	192
1GSBW	WIRING BASICS	1	192
1MCOR	LED FLEX	1	306
1MCORCAP	LED FLEX	1	306
1MFLR	LED FLEX	1	306
1MFLRCAP	LED FLEX	1	306
1MPLA	LED FLEX	1	306
1MPLACAP	LED FLEX	1	306
1MREC	LED FLEX	1	306
1MRECCAP	LED FLEX	1	306
1MSUR	LED FLEX	1	306
1MSURBK	LED FLEX	1	306
1MSURBKCAP	LED FLEX	1	306
1MSURCAP	LED FLEX	1	306
1MSURW	LED FLEX	1	306
1MSURWCAP	LED FLEX	1	306
1W210DA	LAMPS & LIGHTING ACCESSORIES	1	450
20042M	WIRING BASICS	1	201
20043M	WIRING BASICS	1	201
20045S2M	WIRING BASICS	1	201
24DC100D	LAMPS & LIGHTING ACCESSORIES	1	304,450
24DC100M	LAMPS & LIGHTING ACCESSORIES	1	304,449
24DC150M	LAMPS & LIGHTING ACCESSORIES	1	304,449
24DC200M	LAMPS & LIGHTING ACCESSORIES	1	304,449
24DC25D	LAMPS & LIGHTING ACCESSORIES	1	304,450
24DC40	LAMPS & LIGHTING ACCESSORIES	1	303,449
24DC50D	LAMPS & LIGHTING ACCESSORIES	1	304,450
24DC75	LAMPS & LIGHTING ACCESSORIES	1	303,449
24DCIP100A	LAMPS & LIGHTING ACCESSORIES	1	304
24DCIP100P	LAMPS & LIGHTING ACCESSORIES	1	450
24DCIP40	LAMPS & LIGHTING ACCESSORIES	1	304
24DCIP40P	LAMPS & LIGHTING ACCESSORIES	1	450
24DCIP60P	LAMPS & LIGHTING ACCESSORIES	1	304,450
24VDCA	LAMPS & LIGHTING ACCESSORIES	1	303,449
25W350DA	LAMPS & LIGHTING ACCESSORIES	1	450
25W700DA	LAMPS & LIGHTING ACCESSORIES	1	450
2GPHBK	WIRING BASICS	1	199
2GPHW	WIRING BASICS	1	199
2GSBBC	WIRING BASICS	1	192
2GSBBK	WIRING BASICS	1	192
2GSBGY	WIRING BASICS	1	192
2GSBPC	WIRING BASICS	1	192
2GSBW	WIRING BASICS	1	192
2MCOR	LED FLEX	1	306
2MFLR	LED FLEX	1	306
2MPLA	LED FLEX	1	306
2MREC	LED FLEX	1	306
2MSUR	LED FLEX	1	306
316WALK	GROUNDLIGHTS & DECK LIGHTING	1	344
350ND19W	LAMPS & LIGHTING ACCESSORIES	1	450
40W700DA	LAMPS & LIGHTING ACCESSORIES	1	450
4IPB	GROUNDLIGHTS & DECK LIGHTING	1	349
4IPW	GROUNDLIGHTS & DECK LIGHTING	1	349
5FTT5KIT	RECESSED, SURFACE, & SUSPENSION LIGHTING	1	402
8270AB	WIRING BASICS	1	196,447
8270AT	WIRING BASICS	1	196,447
8270BC	WIRING BASICS	1	196,447
8270BN	WIRING BASICS	1	196,447
8270LAB	WIRING BASICS	1	196,447
8270LAT	WIRING BASICS	1	196,447
8270LBC	WIRING BASICS	1	196,447
8270LBN	WIRING BASICS	1	196,447
8270LMB	WIRING BASICS	1	196,447
8270LMW	WIRING BASICS	1	196,447
8270LPB	WIRING BASICS	1	196,447
8270LPC	WIRING BASICS	1	196,447
8270LSB	WIRING BASICS	1	196,447
8270MB	WIRING BASICS	1	196,447
8270MW	WIRING BASICS	1	196,447
8270PB	WIRING BASICS	1	196,447
8270PC	WIRING BASICS	1	196,447
8270SB	WIRING BASICS	1	196,447
8271AB	WIRING BASICS	1	197,447

Code	Catalogue Section	Qty	Page
No.			
8271AT	WIRING BASICS	1	197,447
8271BC	WIRING BASICS	1	197,447
8271BN	WIRING BASICS	1	197,447
8271LAB	WIRING BASICS	1	197,447
8271LAT	WIRING BASICS	1	197,447
8271LBC	WIRING BASICS	1	197,447
8271LBN	WIRING BASICS	1	197,447
8271LMB	WIRING BASICS	1	197,447
8271LMW	WIRING BASICS	1	197,447
8271LPB	WIRING BASICS	1	197,447
8271LPC	WIRING BASICS	1	197,447
8271LSB	WIRING BASICS	1	197,447
8271MB	WIRING BASICS	1	197,447
8271MW	WIRING BASICS	1	197,447
8271PB	WIRING BASICS	1	197,447
8271PC	WIRING BASICS	1	197,447
8271SB	WIRING BASICS	1	197,447
8300AB	WIRING BASICS	1	194
8300AT	WIRING BASICS	1	194
8300BC	WIRING BASICS	1	194
8300BN	WIRING BASICS	1	194
8300MB	WIRING BASICS	1	194
8300MW	WIRING BASICS	1	194
8300PC	WIRING BASICS	1	194
8300SB	WIRING BASICS	1	194
8301AB	WIRING BASICS	1	195
8301AT	WIRING BASICS	1	195
8301BC	WIRING BASICS	1	195
8301BN	WIRING BASICS	1	195
8301MB	WIRING BASICS	1	195
8301MW	WIRING BASICS	1	195
8301PC	WIRING BASICS	1	195
8301SB	WIRING BASICS	1	195
8GTOWER	WIRING BASICS	1	201
Code	Catalogue Section	Qty	Page
A			
ALC1BK	OUTDOOR WALL LIGHTS	1	316
ALC2BK	OUTDOOR WALL LIGHTS	1	316
ALS1BK	OUTDOOR WALL LIGHTS	1	316
ALS2BK	OUTDOOR WALL LIGHTS	1	316
AMA1TSBC	DOWNLIGHTS	1	230
AMA1TSW	DOWNLIGHTS	1	230
AMA2TSBC	DOWNLIGHTS	1	230
AMA2TSW	DOWNLIGHTS	1	230

Code	Catalogue Section	Qty	Page
A			
AMA3TSBC	DOWNLIGHTS	1	231
AMA3TSW	DOWNLIGHTS	1	231
AMA4TSBC	DOWNLIGHTS	1	231
AMA4TSW	DOWNLIGHTS	1	231
AMLEDB	BULKHEADS & WALL PACKS	1	376
AMLEDBP	BULKHEADS & WALL PACKS	1	376
AMLEDBS	BULKHEADS & WALL PACKS	1	376
AMLEDR	BULKHEADS & WALL PACKS	1	376
AMLEDW	BULKHEADS & WALL PACKS	1	376
AMLEDWP	BULKHEADS & WALL PACKS	1	376
AMLEDWS	BULKHEADS & WALL PACKS	1	376
AS15CWA	COMMERCIAL DOWNLIGHTS	1	388-389
AS20CWA	COMMERCIAL DOWNLIGHTS	1	388-390,392
AS30CWA	COMMERCIAL DOWNLIGHTS	1	388-389
AS8CWA	COMMERCIAL DOWNLIGHTS	1	388-389
AT14BK	CEILING & WALL LIGHTS	1	256
AT14W	CEILING & WALL LIGHTS	1	256
AT24BK	CEILING & WALL LIGHTS	1	256
AT24W	CEILING & WALL LIGHTS	1	256
ATCW15BK	CEILING & WALL LIGHTS	1	257
ATCW15W	CEILING & WALL LIGHTS	1	257
ATCW30BK	CEILING & WALL LIGHTS	1	257
ATCW30W	CEILING & WALL LIGHTS	1	257
AV240WPK	DATACOMMS	1	167
AVHD4K10	DATACOMMS	1	167
AVHD4K2	DATACOMMS	1	167
AVHD4K3	DATACOMMS	1	167
AVHD4K5	DATACOMMS	1	167
AVUHD8K2	DATACOMMS	1	167
Code	Catalogue Section	Qty	Page
B			
BA03B3C	BATHROOM	1	279
BA03B3MB	BATHROOM	1	279
BA03B3MW	BATHROOM	1	279
BA03P3C	BATHROOM	1	278
BA03P3MB	BATHROOM	1	278
BA03P3MW	BATHROOM	1	278
BA03S1C	BATHROOM	1	278
BA03S1MB	BATHROOM	1	278
BA03S1MW	BATHROOM	1	278
BATM2	BATTENS	1	411
BATM3	BATTENS	1	411
BATM4	BATTENS	1	411
BATM5	BATTENS	1	411

Code	Catalogue Section	Qty	Page
B			
BATM5H	BATTENS	1	411
BATM6	BATTENS	1	411
BATM6H	BATTENS	1	411
BATMCDA4	BATTENS	1	412
BATMCDA5	BATTENS	1	412
BATMCDA6	BATTENS	1	412
BATMCRN2	BATTENS	1	410
BATMCRN4	BATTENS	1	410
BATMCRN5	BATTENS	1	410
BATMCW4	BATTENS	1	412
BATMCW5	BATTENS	1	412
BATMCW6	BATTENS	1	412
BH22BC	BULKHEADS & WALL PACKS	1	377
BH22PB	BULKHEADS & WALL PACKS	1	377
BL01BK	OUTDOOR WALL LIGHTS	1	326
BL5BK	OUTDOOR WALL LIGHTS	1	325
BL5BLBK	OUTDOOR WALL LIGHTS	1	325
BL5BLG	OUTDOOR WALL LIGHTS	1	325
BL5G	OUTDOOR WALL LIGHTS	1	325
BLED5BB	OUTDOOR WALL LIGHTS	1	326
BLED5BW	OUTDOOR WALL LIGHTS	1	326
BLED5SB	OUTDOOR WALL LIGHTS	1	326
BLED5SW	OUTDOOR WALL LIGHTS	1	326
BLKITBK	OUTDOOR WALL LIGHTS	1	325
BLKITG	OUTDOOR WALL LIGHTS	1	325
BLP10CCT	BOLLARDS	1	330
BPLED	BULKHEADS & WALL PACKS	1	369
BPLEDEM	BULKHEADS & WALL PACKS	1	369
BT14ACT	BULKHEADS & WALL PACKS	1	368
BT14ACTB	BULKHEADS & WALL PACKS	1	283
BT14ACTCH	BULKHEADS & WALL PACKS	1	283
BT14ACTDALI	BULKHEADS & WALL PACKS	1	368
BT14ACTDALIEM	BULKHEADS & WALL PACKS	1	368
BT14ACTEM	BULKHEADS & WALL PACKS	1	368
BT14ACTEMS	BULKHEADS & WALL PACKS	1	368
BT14ACTS	BULKHEADS & WALL PACKS	1	368
BT14B	BULKHEADS & WALL PACKS	1	368
BT14CHR	BULKHEADS & WALL PACKS	1	368
BT14CTA	BULKHEADS & WALL PACKS	1	368
BT14EB	BULKHEADS & WALL PACKS	1	368
BT14EG	BULKHEADS & WALL PACKS	1	368
BT14ES	BULKHEADS & WALL PACKS	1	368
BT14G	BULKHEADS & WALL PACKS	1	368
BT14MBR	BULKHEADS & WALL PACKS	1	368
BT14SLV	BULKHEADS & WALL PACKS	1	368
BT20ACT	BULKHEADS & WALL PACKS	1	369
BT20ACTA	BULKHEADS & WALL PACKS	1	369
BT20ACTDALI	BULKHEADS & WALL PACKS	1	369
BT20ACTDALIEM	BULKHEADS & WALL PACKS	1	369
BT20ACTEM	BULKHEADS & WALL PACKS	1	369
BT20ACTEMA	BULKHEADS & WALL PACKS	1	369
BT20ACTEMS	BULKHEADS & WALL PACKS	1	369
BT20ACTS	BULKHEADS & WALL PACKS	1	369
BT20B	BULKHEADS & WALL PACKS	1	369
BT20CHR	BULKHEADS & WALL PACKS	1	369
BT20G	BULKHEADS & WALL PACKS	1	369
BT20MBR	BULKHEADS & WALL PACKS	1	369
BT20SLV	BULKHEADS & WALL PACKS	1	369
BT9ACT	BULKHEADS & WALL PACKS	1	368
BT9ACTB	BULKHEADS & WALL PACKS	1	283
BT9ACTCH	BULKHEADS & WALL PACKS	1	283
BT9ACTEM	BULKHEADS & WALL PACKS	1	368
BT9ACTEMS	BULKHEADS & WALL PACKS	1	368
BT9ACTS	BULKHEADS & WALL PACKS	1	368
BT9B	BULKHEADS & WALL PACKS	1	368
BT9CHR	BULKHEADS & WALL PACKS	1	368
BT9EB	BULKHEADS & WALL PACKS	1	368
BT9EG	BULKHEADS & WALL PACKS	1	368
BT9ES	BULKHEADS & WALL PACKS	1	368
BT9G	BULKHEADS & WALL PACKS	1	368
BT9MBR	BULKHEADS & WALL PACKS	1	368
BT9SLV	BULKHEADS & WALL PACKS	1	368
BTEV	BULKHEADS & WALL PACKS	5	364
BTEVBEZCH	BULKHEADS & WALL PACKS	1	365
BTEVBEZEG	BULKHEADS & WALL PACKS	1	365
BTEVBEZEMB	BULKHEADS & WALL PACKS	1	365
BTEVBEZMB	BULKHEADS & WALL PACKS	1	365
BTEVCF	BULKHEADS & WALL PACKS	1	364
BTEVCFEM	BULKHEADS & WALL PACKS	1	364
BTEVDALI	BULKHEADS & WALL PACKS	1	364
BTEVDALIEM	BULKHEADS & WALL PACKS	1	364
BTEVEM	BULKHEADS & WALL PACKS	1	364
BTEVMW	BULKHEADS & WALL PACKS	1	364
BTEVMWEM	BULKHEADS & WALL PACKS	1	364
BTEVP	BULKHEADS & WALL PACKS	1	364
BTEVPEM	BULKHEADS & WALL PACKS	1	364

Code	Catalogue Section	Qty	Page
C			
CABCTBC	UNDER CABINET LIGHTING	1	290
CABCTC	UNDER CABINET LIGHTING	1	290
CABCTMB	UNDER CABINET LIGHTING	1	290
CABCTW	UNDER CABINET LIGHTING	1	290
CAPCOVERS	MOULDED - SQUARE EDGE	100	15,28
CAPWGU	GROUNDLIGHTS & DECK LIGHTING	1	344
CBL15SS	OUTDOOR WALL LIGHTS	1	332
CBL22BK	BOLLARDS	1	333
CL010BC	RAISED EDGE - ROUNDED	1	54
CL010MB	RAISED EDGE - ROUNDED	1	54
CL010PC	RAISED EDGE - ROUNDED	1	54
CL014MB	RAISED EDGE - ROUNDED	1	54
CL015BC	RAISED EDGE - ROUNDED	1	54
CL11BC	RAISED EDGE - ROUNDED	1	47
CL11MBB	RAISED EDGE - ROUNDED	1	47
CL11PC	RAISED EDGE - ROUNDED	1	47
CL12BC	RAISED EDGE - ROUNDED	1	47
CL12MBB	RAISED EDGE - ROUNDED	1	47
CL12PC	RAISED EDGE - ROUNDED	1	47
CL1DIMBC	RAISED EDGE - ROUNDED	1	50
CL1DIMMBB	RAISED EDGE - ROUNDED	1	50
CL1DIMPC	RAISED EDGE - ROUNDED	1	50
CL1DPBC	RAISED EDGE - ROUNDED	1	47
CL1DPMBB	RAISED EDGE - ROUNDED	1	47
CL1GBC	RAISED EDGE - ROUNDED	1	55
CL1GMB	RAISED EDGE - ROUNDED	1	55
CL1GPC	RAISED EDGE - ROUNDED	1	55
CL2191BC	RAISED EDGE - ROUNDED	1	49
CL2191MBB	RAISED EDGE - ROUNDED	1	49
CL2191PC	RAISED EDGE - ROUNDED	1	49
CL2192BC	RAISED EDGE - ROUNDED	1	49
CL2192MBB	RAISED EDGE - ROUNDED	1	49
CL2192PC	RAISED EDGE - ROUNDED	1	49
CL2193BC	RAISED EDGE - ROUNDED	1	49
CL2193MBB	RAISED EDGE - ROUNDED	1	49
CL2193PC	RAISED EDGE - ROUNDED	1	49
CL2194BC	RAISED EDGE - ROUNDED	1	50
CL2194MBB	RAISED EDGE - ROUNDED	1	50
CL2194PC	RAISED EDGE - ROUNDED	1	50
CL2BC	RAISED EDGE - ROUNDED	1	47
CL2GBC	RAISED EDGE - ROUNDED	1	55
CL2GMB	RAISED EDGE - ROUNDED	1	55
CL2GPC	RAISED EDGE - ROUNDED	1	55
CL2MBB	RAISED EDGE - ROUNDED	1	47
CL2PC	RAISED EDGE - ROUNDED	1	47
CL3BC	RAISED EDGE - ROUNDED	1	48
CL3MBB	RAISED EDGE - ROUNDED	1	48
CL3PC	RAISED EDGE - ROUNDED	1	48
CL41BC	RAISED EDGE - ROUNDED	1	48
CL41MBB	RAISED EDGE - ROUNDED	1	48
CL41PC	RAISED EDGE - ROUNDED	1	48
CL42BC	RAISED EDGE - ROUNDED	1	48
CL42MBB	RAISED EDGE - ROUNDED	1	48
CL45BC	RAISED EDGE - ROUNDED	1	53
CL45MB	RAISED EDGE - ROUNDED	1	53
CL4BC	RAISED EDGE - ROUNDED	1	48
CL4GBC	RAISED EDGE - ROUNDED	1	55
CL4GMB	RAISED EDGE - ROUNDED	1	55
CL4GPC	RAISED EDGE - ROUNDED	1	55
CL4MBB	RAISED EDGE - ROUNDED	1	48
CL4PC	RAISED EDGE - ROUNDED	1	48
CL5ABC	RAISED EDGE - ROUNDED	1	46
CL5ABCG	RAISED EDGE - ROUNDED	1	46
CL5ABCW	RAISED EDGE - ROUNDED	1	46
CL5AMB	RAISED EDGE - ROUNDED	1	46
CL5KW	SMART HOME	1	459
CL63BC	RAISED EDGE - ROUNDED	1	51
CL63FBC	RAISED EDGE - ROUNDED	1	51
CL63FMBB	RAISED EDGE - ROUNDED	1	51
CL63FPC	RAISED EDGE - ROUNDED	1	51
CL63MBB	RAISED EDGE - ROUNDED	1	51
CL63NBC	RAISED EDGE - ROUNDED	1	51
CL63NMBB	RAISED EDGE - ROUNDED	1	51
CL63NPC	RAISED EDGE - ROUNDED	1	51
CL63PC	RAISED EDGE - ROUNDED	1	51
CL63WMB	RAISED EDGE - ROUNDED	1	42
CL6BC	RAISED EDGE - ROUNDED	1	51
CL6MBB	RAISED EDGE - ROUNDED	1	51
CL6PC	RAISED EDGE - ROUNDED	1	51
CL73BC	RAISED EDGE - ROUNDED	1	53
CL73MB	RAISED EDGE - ROUNDED	1	53
CL73PC	RAISED EDGE - ROUNDED	1	53
CL74BC	RAISED EDGE - ROUNDED	1	53
CL74MB	RAISED EDGE - ROUNDED	1	53
CL74PC	RAISED EDGE - ROUNDED	1	53
CL7BC	RAISED EDGE - ROUNDED	1	44
CL7BCG	RAISED EDGE - ROUNDED	1	44
CL7BCW	RAISED EDGE - ROUNDED	1	44

Code	Catalogue Section	Qty	Page
C			
CL7MBB	RAISED EDGE - ROUNDED	1	44
CL7PC	RAISED EDGE - ROUNDED	1	44
CL7PCG	RAISED EDGE - ROUNDED	1	44
CL7PCW	RAISED EDGE - ROUNDED	1	44
CL81MNBC	RAISED EDGE - ROUNDED	1	52
CL81MNMBB	RAISED EDGE - ROUNDED	1	52
CL81MNPC	RAISED EDGE - ROUNDED	1	52
CL82MNBC	RAISED EDGE - ROUNDED	1	52
CL82MNMBB	RAISED EDGE - ROUNDED	1	52
CL82MNPC	RAISED EDGE - ROUNDED	1	52
CL8342BC	RAISED EDGE - ROUNDED	1	52
CL8342MB	RAISED EDGE - ROUNDED	1	52
CL8342PC	RAISED EDGE - ROUNDED	1	52
CL834BC	RAISED EDGE - ROUNDED	1	52
CL834FBC	RAISED EDGE - ROUNDED	1	52
CL834FMBB	RAISED EDGE - ROUNDED	1	52
CL834FPC	RAISED EDGE - ROUNDED	1	52
CL834MBB	RAISED EDGE - ROUNDED	1	52
CL834NBC	RAISED EDGE - ROUNDED	1	52
CL834NMBB	RAISED EDGE - ROUNDED	1	52
CL834NPC	RAISED EDGE - ROUNDED	1	52
CL834PC	RAISED EDGE - ROUNDED	1	52
CL83MNBC	RAISED EDGE - ROUNDED	1	53
CL83MNBCG	RAISED EDGE - ROUNDED	1	53
CL83MNBCW	RAISED EDGE - ROUNDED	1	53
CL83MNMBB	RAISED EDGE - ROUNDED	1	53
CL83MNPC	RAISED EDGE - ROUNDED	1	53
CL83MNPCG	RAISED EDGE - ROUNDED	1	53
CL83MNPCW	RAISED EDGE - ROUNDED	1	53
CL85BC	RAISED EDGE - ROUNDED	1	54
CL85MB	RAISED EDGE - ROUNDED	1	54
CL85PC	RAISED EDGE - ROUNDED	1	54
CL86BC	RAISED EDGE - ROUNDED	1	54
CL86MB	RAISED EDGE - ROUNDED	1	54
CL86PC	RAISED EDGE - ROUNDED	1	54
CL8909MB	RAISED EDGE - ROUNDED	1	46
CL89BC	RAISED EDGE - ROUNDED	1	46
CL89BCG	RAISED EDGE - ROUNDED	1	46
CL89BCW	RAISED EDGE - ROUNDED	1	46
CL89MB	RAISED EDGE - ROUNDED	1	46
CL89PC	RAISED EDGE - ROUNDED	1	46
CL89PCG	RAISED EDGE - ROUNDED	1	46
CL89PCW	RAISED EDGE - ROUNDED	1	46
CL9001BC	RAISED EDGE - ROUNDED	1	45
CL9001BCUR	RAISED EDGE - ROUNDED	1	45
CL9001BCW	RAISED EDGE - ROUNDED	1	45
CL9001BCWUR	RAISED EDGE - ROUNDED	1	45
CL9919MBB	RAISED EDGE - ROUNDED	1	43
CL9940BC	RAISED EDGE - ROUNDED	1	43
CL9940BCG	RAISED EDGE - ROUNDED	1	43
CL9940BCW	RAISED EDGE - ROUNDED	1	43
CL9940MBB	RAISED EDGE - ROUNDED	1	43
CL9940PC	RAISED EDGE - ROUNDED	1	43
CL9940PCG	RAISED EDGE - ROUNDED	1	43
CL9940PCW	RAISED EDGE - ROUNDED	1	43
CL9941BC	RAISED EDGE - ROUNDED	1	45
CL9941BCUR	RAISED EDGE - ROUNDED	1	45
CL9941BCW	RAISED EDGE - ROUNDED	1	45
CL9941BCWUR	RAISED EDGE - ROUNDED	1	45
CL9945MBB	RAISED EDGE - ROUNDED	1	42
CL9965MBB	RAISED EDGE - ROUNDED	1	42
CL9BC	RAISED EDGE - ROUNDED	1	44
CL9BCG	RAISED EDGE - ROUNDED	1	44
CL9BCW	RAISED EDGE - ROUNDED	1	44
CL9LOCKBCW	RAISED EDGE - ROUNDED	1	44
CL9LOCKMB	RAISED EDGE - ROUNDED	1	44
CL9MBB	RAISED EDGE - ROUNDED	1	44
CL9PC	RAISED EDGE - ROUNDED	1	44
CL9PCG	RAISED EDGE - ROUNDED	1	44
CL9PCW	RAISED EDGE - ROUNDED	1	44
CLC6BC	RAISED EDGE - ROUNDED	1	54
CLC6MB	RAISED EDGE - ROUNDED	1	54
CLD4ABCC	LAMPS & LIGHTING ACCESSORIES	1	446
CLD4AESC	LAMPS & LIGHTING ACCESSORIES	1	446
CLD4ASESC	LAMPS & LIGHTING ACCESSORIES	1	446
CLD4ASESO	LAMPS & LIGHTING ACCESSORIES	1	446
CPLCW12	COMMERCIAL DOWNLIGHTS	1	384
CPLCW18	COMMERCIAL DOWNLIGHTS	1	385
CPLCW24	COMMERCIAL DOWNLIGHTS	1	385
CPLCW8	COMMERCIAL DOWNLIGHTS	1	384
CPLCWBZ12BC	COMMERCIAL DOWNLIGHTS	1	384
CPLCWBZ12MB	COMMERCIAL DOWNLIGHTS	1	384
CPLCWBZ12PC	COMMERCIAL DOWNLIGHTS	1	384
CPLCWBZ18BC	COMMERCIAL DOWNLIGHTS	1	385
CPLCWBZ18MB	COMMERCIAL DOWNLIGHTS	1	385
CPLCWBZ18PC	COMMERCIAL DOWNLIGHTS	1	385
CPLCWBZ24BC	COMMERCIAL DOWNLIGHTS	1	385
CPLCWBZ24MB	COMMERCIAL DOWNLIGHTS	1	385

Code	Catalogue Section	Qty	Page
C			
CPLCWBZ24PC	COMMERCIAL DOWNLIGHTS	1	385
CPLCWBZ8BC	COMMERCIAL DOWNLIGHTS	1	384
CPLCWBZ8MB	COMMERCIAL DOWNLIGHTS	1	384
CPLCWBZ8PC	COMMERCIAL DOWNLIGHTS	1	384
CPLEM	EMERGENCY LIGHTING	1	385,438
CRN12CW	LAMPS & LIGHTING ACCESSORIES	1	443
CRN18CW	LAMPS & LIGHTING ACCESSORIES	1	443
CRN27CW	LAMPS & LIGHTING ACCESSORIES	1	443
CRN36CW	LAMPS & LIGHTING ACCESSORIES	1	443
CRN54CW	LAMPS & LIGHTING ACCESSORIES	1	443
CS010AB	RAISED EDGE - SQUARE	1	70
CS010BC	RAISED EDGE - SQUARE	1	70
CS11AB	RAISED EDGE - SQUARE	1	63
CS11BC	RAISED EDGE - SQUARE	1	63
CS12AB	RAISED EDGE - SQUARE	1	64
CS12BC	RAISED EDGE - SQUARE	1	64
CS1DIMAB	RAISED EDGE - SQUARE	1	67
CS1DIMBC	RAISED EDGE - SQUARE	1	67
CS1DPAB	RAISED EDGE - SQUARE	1	64
CS1GAB	RAISED EDGE - SQUARE	1	71
CS1GBC	RAISED EDGE - SQUARE	1	71
CS2191AB	RAISED EDGE - SQUARE	1	66
CS2191BC	RAISED EDGE - SQUARE	1	66
CS2192AB	RAISED EDGE - SQUARE	1	66
CS2192BC	RAISED EDGE - SQUARE	1	66
CS2193AB	RAISED EDGE - SQUARE	1	66
CS2193BC	RAISED EDGE - SQUARE	1	66
CS2194AB	RAISED EDGE - SQUARE	1	67
CS2194BC	RAISED EDGE - SQUARE	1	67
CS2AB	RAISED EDGE - SQUARE	1	64
CS2BC	RAISED EDGE - SQUARE	1	64
CS2GAB	RAISED EDGE - SQUARE	1	71
CS2GBC	RAISED EDGE - SQUARE	1	71
CS3AB	RAISED EDGE - SQUARE	1	65
CS3BC	RAISED EDGE - SQUARE	1	65
CS41AB	RAISED EDGE - SQUARE	1	65
CS41BC	RAISED EDGE - SQUARE	1	65
CS42AB	RAISED EDGE - SQUARE	1	65
CS45AB	RAISED EDGE - SQUARE	1	70
CS4AB	RAISED EDGE - SQUARE	1	65
CS4BC	RAISED EDGE - SQUARE	1	65
CS4GAB	RAISED EDGE - SQUARE	1	71
CS4GBC	RAISED EDGE - SQUARE	1	71
CS5AAB	RAISED EDGE - SQUARE	1	63

Code	Catalogue Section	Qty	Page
C			
CS63AB	RAISED EDGE - SQUARE	1	68
CS63BC	RAISED EDGE - SQUARE	1	68
CS63FAB	RAISED EDGE - SQUARE	1	68
CS63FBC	RAISED EDGE - SQUARE	1	68
CS63NAB	RAISED EDGE - SQUARE	1	68
CS63NBC	RAISED EDGE - SQUARE	1	68
CS6AB	RAISED EDGE - SQUARE	1	68
CS6BC	RAISED EDGE - SQUARE	1	68
CS7AB	RAISED EDGE - SQUARE	1	62
CS7BC	RAISED EDGE - SQUARE	1	62
CS7BCG	RAISED EDGE - SQUARE	1	62
CS7BCW	RAISED EDGE - SQUARE	1	62
CS81MNAB	RAISED EDGE - SQUARE	1	69
CS81MNBC	RAISED EDGE - SQUARE	1	69
CS82MNAB	RAISED EDGE - SQUARE	1	69
CS82MNBC	RAISED EDGE - SQUARE	1	69
CS8342AB	RAISED EDGE - SQUARE	1	69
CS8342BC	RAISED EDGE - SQUARE	1	69
CS834AB	RAISED EDGE - SQUARE	1	68
CS834BC	RAISED EDGE - SQUARE	1	68
CS834FAB	RAISED EDGE - SQUARE	1	68
CS834FBC	RAISED EDGE - SQUARE	1	68
CS834NAB	RAISED EDGE - SQUARE	1	68
CS834NBC	RAISED EDGE - SQUARE	1	68
CS83MNAB	RAISED EDGE - SQUARE	1	69
CS83MNBC	RAISED EDGE - SQUARE	1	69
CS83MNBCG	RAISED EDGE - SQUARE	1	69
CS83MNBCW	RAISED EDGE - SQUARE	1	69
CS85AB	RAISED EDGE - SQUARE	1	71
CS85BC	RAISED EDGE - SQUARE	1	71
CS86AB	RAISED EDGE - SQUARE	1	71
CS86BC	RAISED EDGE - SQUARE	1	71
CS89AB	RAISED EDGE - SQUARE	1	63
CS89BC	RAISED EDGE - SQUARE	1	63
CS89BCG	RAISED EDGE - SQUARE	1	63
CS89BCW	RAISED EDGE - SQUARE	1	63
CS9919AB	RAISED EDGE - SQUARE	1	61
CS9940AB	RAISED EDGE - SQUARE	1	61
CS9940BC	RAISED EDGE - SQUARE	1	61
CS9940BCG	RAISED EDGE - SQUARE	1	61
CS9940BCW	RAISED EDGE - SQUARE	1	61
CS9945AB	RAISED EDGE - SQUARE	1	60
CS9965AB	RAISED EDGE - SQUARE	1	60
CS9AB	RAISED EDGE - SQUARE	1	62

Code	Catalogue Section	Qty	Page
C			
CS9BC	RAISED EDGE - SQUARE	1	62
CS9BCG	RAISED EDGE - SQUARE	1	62
CS9BCW	RAISED EDGE - SQUARE	1	62
CSC6AB	RAISED EDGE - SQUARE	1	70
CSCREW35	WIRING BASICS	100	15,28,199
CSCREW35EXT	WIRING BASICS	10	15,28,199
CSCREW50	WIRING BASICS	100	15,28,199
CSCREW50FB	WIRING BASICS	100	199
CSCREW50FBK	WIRING BASICS	100	199
CSCREW50FN	WIRING BASICS	100	199
CSCREW75	WIRING BASICS	100	15,28,199
CSCREW75FN	WIRING BASICS	100	199
CSCREWM3	WIRING BASICS	100	30
CSP1AB	CEILING & WALL LIGHTS	1	266
CSP1BC	CEILING & WALL LIGHTS	1	266
CSP1MB	CEILING & WALL LIGHTS	1	266
CSP2AB	CEILING & WALL LIGHTS	1	266
CSP2BC	CEILING & WALL LIGHTS	1	266
CSP2MB	CEILING & WALL LIGHTS	1	266
CSP3AB	CEILING & WALL LIGHTS	1	267
CSP3BC	CEILING & WALL LIGHTS	1	267
CSP3MB	CEILING & WALL LIGHTS	1	267
CSP4AB	CEILING & WALL LIGHTS	1	267
CSP4BC	CEILING & WALL LIGHTS	1	267
CSP4MB	CEILING & WALL LIGHTS	1	267
CSPT1BC	CEILING & WALL LIGHTS	1	270
CSPT1BK	CEILING & WALL LIGHTS	1	270
CSPT1W	CEILING & WALL LIGHTS	1	270
CSTOG12AB	RAISED EDGE - SQUARE	1	65
CSTOG1AB	RAISED EDGE - SQUARE	1	65
CSTOG2AB	RAISED EDGE - SQUARE	1	65
CSTOG3AB	RAISED EDGE - SQUARE	1	65
CSTOG4AB	RAISED EDGE - SQUARE	1	65
CU0100	MOULDED - CURVED EDGE	1	28
CU0110	MOULDED - CURVED EDGE	1	28
CU0120	MOULDED - CURVED EDGE	1	28
CU0140	MOULDED - CURVED EDGE	1	28
CU0150	MOULDED - CURVED EDGE	1	28
CU1000	MOULDED - CURVED EDGE	1	24
CU1000DP	MOULDED - CURVED EDGE	1	24
CU1000DPK	MOULDED - CURVED EDGE	1	24
CU1100	MOULDED - CURVED EDGE	1	24
CU110V	MOULDED - CURVED EDGE	1	12,23,31,50,67,84,114
CU1200	MOULDED - CURVED EDGE	1	24
CU1200M	MOULDED - CURVED EDGE	1	24
CU12W	MOULDED - CURVED EDGE	1	24
CU1300	MOULDED - CURVED EDGE	10	28
CU1400	MOULDED - CURVED EDGE	10	28
CU1500	MOULDED - CURVED EDGE	5	28
CU150I	MOULDED - CURVED EDGE	1	12,23,31,50,67,84,114
CU1600	MOULDED - CURVED EDGE	5	28
CU1610	MOULDED - CURVED EDGE	10	28
CU1700	MOULDED - CURVED EDGE	10	28
CU1800	MOULDED - CURVED EDGE	5	28
CU194MM	MOULDED - CURVED EDGE	1	29
CU1DIM	MOULDED - CURVED EDGE	1	23
CU1DPW	MOULDED - CURVED EDGE	1	24
CU1G	MOULDED - CURVED EDGE	1	29
CU2000	MOULDED - CURVED EDGE	1	24
CU2000K	MOULDED - CURVED EDGE	1	24
CU2100	MOULDED - CURVED EDGE	1	24
CU2100M	MOULDED - CURVED EDGE	1	24
CU2161	MOULDED - CURVED EDGE	1	23
CU2162	MOULDED - CURVED EDGE	1	23
CU2163	MOULDED - CURVED EDGE	1	23
CU2164	MOULDED - CURVED EDGE	1	23
CU2191	MOULDED - CURVED EDGE	1	23
CU2192	MOULDED - CURVED EDGE	1	23
CU2193	MOULDED - CURVED EDGE	1	23
CU2194	MOULDED - CURVED EDGE	1	23
CU298MM	MOULDED - CURVED EDGE	1	29
CU2DIM	MOULDED - CURVED EDGE	1	23
CU2G	MOULDED - CURVED EDGE	1	29
CU2W	MOULDED - CURVED EDGE	1	24
CU3000	MOULDED - CURVED EDGE	1	24
CU3DIM	MOULDED - CURVED EDGE	1	23
CU3W	MOULDED - CURVED EDGE	1	24
CU4000	MOULDED - CURVED EDGE	1	24
CU4100	MOULDED - CURVED EDGE	1	24
CU4101	MOULDED - CURVED EDGE	1	24
CU4200	MOULDED - CURVED EDGE	1	24
CU4DIM	MOULDED - CURVED EDGE	1	23
CU4G	MOULDED - CURVED EDGE	1	29
CU4W	MOULDED - CURVED EDGE	1	24
CU5U	MOULDED - CURVED EDGE	1	22
CU6000	MOULDED - CURVED EDGE	1	27
CU6000-3A	MOULDED - CURVED EDGE	1	27
CU6000N	MOULDED - CURVED EDGE	1	27

Code	Catalogue Section	Qty	Page
C			
CU6000NF	MOULDED - CURVED EDGE	1	27
CU6300	MOULDED - CURVED EDGE	1	27
CU6300F	MOULDED - CURVED EDGE	1	27
CU6300N	MOULDED - CURVED EDGE	1	27
CU6300NF	MOULDED - CURVED EDGE	1	27
CU6RCD	MOULDED - CURVED EDGE	1	19
CU7000	MOULDED - CURVED EDGE	1	19
CU7000S	MOULDED - CURVED EDGE	1	19
CU7000U	MOULDED - CURVED EDGE	1	19
CU7300	MOULDED - CURVED EDGE	1	28
CU7400	MOULDED - CURVED EDGE	1	28
CU8331	MOULDED - CURVED EDGE	1	27
CU8331N	MOULDED - CURVED EDGE	1	27
CU8331NW	MOULDED - CURVED EDGE	1	27
CU8331W	MOULDED - CURVED EDGE	1	27
CU8332	MOULDED - CURVED EDGE	1	27
CU8332N	MOULDED - CURVED EDGE	1	27
CU8332NW	MOULDED - CURVED EDGE	1	27
CU8332W	MOULDED - CURVED EDGE	1	27
CU8333	MOULDED - CURVED EDGE	1	27
CU8333N	MOULDED - CURVED EDGE	1	27
CU8333NW	MOULDED - CURVED EDGE	1	27
CU8333W	MOULDED - CURVED EDGE	1	27
CU8340	MOULDED - CURVED EDGE	1	27
CU8341	MOULDED - CURVED EDGE	1	26
CU8341L	MOULDED - CURVED EDGE	1	19
CU8341N	MOULDED - CURVED EDGE	1	26
CU8341NF	MOULDED - CURVED EDGE	1	26
CU8342	MOULDED - CURVED EDGE	1	26
CU8345NF	MOULDED - CURVED EDGE	1	26
CU8350	MOULDED - CURVED EDGE	1	28
CU8360	MOULDED - CURVED EDGE	1	28
CU8900N	MOULDED - CURVED EDGE	1	26
CU8909	MOULDED - CURVED EDGE	1	26
CU9000	MOULDED - CURVED EDGE	1	19
CU9000S	MOULDED - CURVED EDGE	1	19
CU9000U	MOULDED - CURVED EDGE	1	19
CU9001	MOULDED - CURVED EDGE	1	19
CU9002	MOULDED - CURVED EDGE	1	21
CU9003	MOULDED - CURVED EDGE	1	20
CU9919D	MOULDED - CURVED EDGE	1	19
CU9930	MOULDED - CURVED EDGE	1	21
CU9931D	MOULDED - CURVED EDGE	1	21
CU9948	MOULDED - CURVED EDGE	1	21

Code	Catalogue Section	Qty	Page
C			
CU9965	MOULDED - CURVED EDGE	1	20
CU9KW	SMART HOME	1	22,456
CU9LOCKN	MOULDED - CURVED EDGE	1	19
CU9NL	MOULDED - CURVED EDGE	1	21
CU9R	MOULDED - CURVED EDGE	1	22
CU9RCD	MOULDED - CURVED EDGE	1	19
CUBOIL	MOULDED - CURVED EDGE	1	32
CUBOOST	MOULDED - CURVED EDGE	1	32
CUCARD	MOULDED - CURVED EDGE	1	26
CUCOFF	MOULDED - CURVED EDGE	1	32
CUDISH	MOULDED - CURVED EDGE	1	32
CUDRY	MOULDED - CURVED EDGE	1	32
CUFAN	MOULDED - CURVED EDGE	1	32
CUFREEZER	MOULDED - CURVED EDGE	1	32
CUFRID	MOULDED - CURVED EDGE	1	32
CUFRIDGE	MOULDED - CURVED EDGE	1	32
CUG1	MOULDED - CURVED EDGE	1	30
CUG12	MOULDED - CURVED EDGE	1	30
CUG1F	MOULDED - CURVED EDGE	1	30,35
CUG2	MOULDED - CURVED EDGE	1	30
CUG2F	MOULDED - CURVED EDGE	1	30
CUG3	MOULDED - CURVED EDGE	1	30
CUG4	MOULDED - CURVED EDGE	1	30
CUG6	MOULDED - CURVED EDGE	1	30
CUG8	MOULDED - CURVED EDGE	1	30
CUGM1	MOULDED - CURVED EDGE	1	30
CUGM10	MOULDED - CURVED EDGE	1	31
CUGM11	MOULDED - CURVED EDGE	1	31
CUGM12	MOULDED - CURVED EDGE	1	31
CUGM13	MOULDED - CURVED EDGE	1	31
CUGM15	MOULDED - CURVED EDGE	1	31
CUGM16	MOULDED - CURVED EDGE	1	31
CUGM17	MOULDED - CURVED EDGE	1	31
CUGM19	MOULDED - CURVED EDGE	1	30,35
CUGM19K	MOULDED - CURVED EDGE	1	30
CUGM2	MOULDED - CURVED EDGE	1	30
CUGM23	MOULDED - CURVED EDGE	1	30
CUGM2TOG	MOULDED - CURVED EDGE	1	31
CUGM3	MOULDED - CURVED EDGE	1	30
CUGM4	MOULDED - CURVED EDGE	1	30
CUGM4TOG	MOULDED - CURVED EDGE	1	31
CUGM5	MOULDED - CURVED EDGE	1	30
CUGM6	MOULDED - CURVED EDGE	1	30
CUGM6N	MOULDED - CURVED EDGE	1	30

Code	Catalogue Section	Qty	Page
C			
CUGM6TOG	MOULDED - CURVED EDGE	1	31
CUGM7	MOULDED - CURVED EDGE	1	31
CUGM8	MOULDED - CURVED EDGE	1	31
CUGM9	MOULDED - CURVED EDGE	1	31
CUGMDS	MOULDED - CURVED EDGE	1	31
CUGMUSB	MOULDED - CURVED EDGE	1	31
CUHOB	MOULDED - CURVED EDGE	1	32
CUHOOD	MOULDED - CURVED EDGE	1	32
CUMICRO	MOULDED - CURVED EDGE	1	32
CUOVEN	MOULDED - CURVED EDGE	1	32
CUWARM	MOULDED - CURVED EDGE	1	32
CUWASH	MOULDED - CURVED EDGE	1	32
CUWASTE	MOULDED - CURVED EDGE	1	32
CUWINE	MOULDED - CURVED EDGE	1	32
CYRAG	DOWNLIGHTS	1	243
CYRAGBZMB	DOWNLIGHTS	1	243
CYRAGBZW	DOWNLIGHTS	1	243
CYRAGBZWB	DOWNLIGHTS	1	243
CYRBZAB	DOWNLIGHTS	1	242
CYRBZB	DOWNLIGHTS	1	242
CYRBZBC	DOWNLIGHTS	1	242
CYRBZMB	DOWNLIGHTS	1	242
CYRBZPC	DOWNLIGHTS	1	242
CYRBZW	DOWNLIGHTS	1	242
CYRF	DOWNLIGHTS	1	242
CYRFS10	DOWNLIGHTS	1	243
CYRT	DOWNLIGHTS	1	242
Code	Catalogue Section	Qty	Page
D			
DAA1FRB	DOWNLIGHTS	1	234
DAA1FRBC	DOWNLIGHTS	1	234
DAA1FRW	DOWNLIGHTS	1	234
DAB1FRB	DOWNLIGHTS	1	234
DAB1FRBC	DOWNLIGHTS	1	234
DAB1FRW	DOWNLIGHTS	1	234
DC010	WIRELESS DOOR CHIMES	1	206
DC012	WIRELESS DOOR CHIMES	1	206
DC013	WIRELESS DOOR CHIMES	1	206
DC014	WIRELESS DOOR CHIMES	1	206
DC015	WIRELESS DOOR CHIMES	1	206
DC016	WIRELESS DOOR CHIMES	1	207
DCBPB	WIRELESS DOOR CHIMES	1	207
DCBPW	WIRELESS DOOR CHIMES	1	207
DCRB	WIRELESS DOOR CHIMES	1	207
Code	Catalogue Section	Qty	Page
D			
DCRW	WIRELESS DOOR CHIMES	1	207
DEA1TRB	DOWNLIGHTS	1	233
DEA1TRBC	DOWNLIGHTS	1	233
DEA1TRW	DOWNLIGHTS	1	233
DEA2TRB	DOWNLIGHTS	1	233
DEA2TRBC	DOWNLIGHTS	1	233
DEA2TRW	DOWNLIGHTS	1	233
DIA1FRB	DOWNLIGHTS	1	229
DIA1FRW	DOWNLIGHTS	1	229
DIA1FSB	DOWNLIGHTS	1	229
DIA1FSW	DOWNLIGHTS	1	229
DIB1TRB	DOWNLIGHTS	1	229
DIB1TRW	DOWNLIGHTS	1	229
DIB1TSB	DOWNLIGHTS	1	229
DIB1TSW	DOWNLIGHTS	1	229
DIC2TRB	DOWNLIGHTS	1	229
DIC2TRW	DOWNLIGHTS	1	229
DIC2TSB	DOWNLIGHTS	1	229
DIC2TSW	DOWNLIGHTS	1	229
DIMDAB	SCREWLESS	1	50,67,84,114
DIMDBB	SCREWLESS	1	50,67,84,114
DIMDBC	SCREWLESS	1	50,67,84,114
DIMDMB	SCREWLESS	1	50,67,84,114
Code	Catalogue Section	Qty	Page
E			
E27PC	BULKHEADS & WALL PACKS	1	377
E27PR	BULKHEADS & WALL PACKS	1	377
EA1A	OUTDOOR WALL LIGHTS	1	317
EA1BB	OUTDOOR WALL LIGHTS	1	317
EA1BK	OUTDOOR WALL LIGHTS	1	317
EA1W	OUTDOOR WALL LIGHTS	1	317
EA2A	OUTDOOR WALL LIGHTS	1	317
EA2BB	OUTDOOR WALL LIGHTS	1	317
EA2BK	OUTDOOR WALL LIGHTS	1	317
EA2W	OUTDOOR WALL LIGHTS	1	317
EAPIR1BK	OUTDOOR WALL LIGHTS	1	318
EAPIR2BK	OUTDOOR WALL LIGHTS	1	318
EASPK1A	SPIKE LIGHTS	1	336
EASPK1BB	SPIKE LIGHTS	1	336
EASPK1BK	SPIKE LIGHTS	1	336
EASPK1W	SPIKE LIGHTS	1	336
ECLEMBK	CEILING & WALL LIGHTS	1	259
ECLEMW	CEILING & WALL LIGHTS	1	259
EL6060	RECESSED, SURFACE, & SUSPENSION LIGHTING	1	397

Code	Catalogue Section	Qty	Page
E			
EL6060EM	RECESSED, SURFACE, & SUSPENSION LIGHTING	1	397
EMEXIT2	EMERGENCY LIGHTING	1	433
EMEXIT2DA	EMERGENCY LIGHTING	1	433
EMEXITL	EMERGENCY LIGHTING	1	434
EMEXITL2	EMERGENCY LIGHTING	1	435
EMEXITL3	EMERGENCY LIGHTING	1	435
EMEXITLBK	EMERGENCY LIGHTING	1	434
EMEXITLR	EMERGENCY LIGHTING	1	435
EMGUKIT3	EMERGENCY LIGHTING	1	225,439
EMKIT2DA	EMERGENCY LIGHTING	1	396,439
EMKIT2LSM	EMERGENCY LIGHTING	1	396,439
EMLED1L	EMERGENCY LIGHTING	1	430
EMLED2AL	EMERGENCY LIGHTING	1	431
EMLED3L	EMERGENCY LIGHTING	1	430
EMLED4L	EMERGENCY LIGHTING	1	430
EMLED5L	EMERGENCY LIGHTING	1	431
EMLRECL	EMERGENCY LIGHTING	1	435
EMLSUSL	EMERGENCY LIGHTING	1	435
EMPDL1	EMERGENCY LIGHTING	1	438
EMPOWER3	EMERGENCY LIGHTING	1	436
EMPOWER4	EMERGENCY LIGHTING	1	437
EMPOWER4BK	EMERGENCY LIGHTING	1	437
EMPOWER4ST	EMERGENCY LIGHTING	1	437
EMPOWER4W	EMERGENCY LIGHTING	1	437
EMPOWER4WST	EMERGENCY LIGHTING	1	437
EMPOWERSTL	EMERGENCY LIGHTING	1	436
EMRNSTL	EMERGENCY LIGHTING	1	432
EMRUN	EMERGENCY LIGHTING	1	432
EMRUND	EMERGENCY LIGHTING	1	432
EMRUNL	EMERGENCY LIGHTING	1	432
EMRUNR	EMERGENCY LIGHTING	1	432
EMRUNU	EMERGENCY LIGHTING	1	432
EMSUR2	EMERGENCY LIGHTING	1	438
EMSUR2BK	EMERGENCY LIGHTING	1	438
EMSWING	EMERGENCY LIGHTING	1	433
EMSWINGD	EMERGENCY LIGHTING	1	433
EMSWINGLR	EMERGENCY LIGHTING	1	433
EMTWINLIP	EMERGENCY LIGHTING	1	429
EMTWINLPC	EMERGENCY LIGHTING	1	429
EMTWINST	EMERGENCY LIGHTING	1	429
EMXSTL	EMERGENCY LIGHTING	1	434
ENM5C	EMERGENCY LIGHTING	1	436
EX001T	VENTILATION	1	210
EX007B	VENTILATION	1	210
EX007W	VENTILATION	1	210
EX009B	VENTILATION	1	210
EX009W	VENTILATION	1	210
EX1TBK	VENTILATION	1	209
EX1THWH	VENTILATION	1	209
EX1TWH	VENTILATION	1	209
EX3TWH	VENTILATION	1	208
EX4DUCT	VENTILATION	1	210
EX4TSS	VENTILATION	1	208
EX5TMB	VENTILATION	1	208
EXT2	SPIKE LIGHTS	1	338
EXT3	SPIKE LIGHTS	1	338
Code	Catalogue Section	Qty	Page
F			
FL16ABK	FLOODLIGHTS	1	357
FL16AW	FLOODLIGHTS	1	357
FL8ABK	FLOODLIGHTS	1	357
FL8AW	FLOODLIGHTS	1	357
FLG20RGB	FLOODLIGHTS	1	358
FLG50RGB	FLOODLIGHTS	1	358
FLHL100	FLOODLIGHTS	1	354
FLHL200	FLOODLIGHTS	1	354
FLHLAS100	FLOODLIGHTS	1	355
FLHLAS200	FLOODLIGHTS	1	355
FLHLPC200	FLOODLIGHTS	1	355
FLHLPM	FLOODLIGHTS	1	355
FLHLSM100	FLOODLIGHTS	1	355
FLHLSM200	FLOODLIGHTS	1	355
FLN10	FLOODLIGHTS	1	352
FLN20	FLOODLIGHTS	1	352
FLN30	FLOODLIGHTS	1	352
FLN50	FLOODLIGHTS	1	352
FLNMIC	FLOODLIGHTS	1	352
FLNPIR	FLOODLIGHTS	1	352
FLPA150D	FLOODLIGHTS	1	353
FP0100BB	FLAT PLATE	1	90
FP0100BC	FLAT PLATE	1	90
FP0100GM	FLAT PLATE	1	90
FP0100PB	FLAT PLATE	1	90
FP0100PC	FLAT PLATE	1	90
FP0100PL	FLAT PLATE	1	90
FP1100BB	FLAT PLATE	1	79
FP1100BC	FLAT PLATE	1	79
FP1100GM	FLAT PLATE	1	79

Code	Catalogue Section	Qty	Page
F			
FP1100PB	FLAT PLATE	1	79
FP1100PC	FLAT PLATE	1	79
FP1100PL	FLAT PLATE	1	79
FP1200BB	FLAT PLATE	1	80
FP1200BC	FLAT PLATE	1	80
FP1200GM	FLAT PLATE	1	80
FP1200PB	FLAT PLATE	1	80
FP1200PC	FLAT PLATE	1	80
FP1200PL	FLAT PLATE	1	80
FP12TOGBB	FLAT PLATE	1	82
FP1DIMBB	FLAT PLATE	1	84
FP1DIMBC	FLAT PLATE	1	84
FP1DIMPC	FLAT PLATE	1	84
FP1GBB	FLAT PLATE	1	93
FP1GBC	FLAT PLATE	1	93
FP1GGM	FLAT PLATE	1	93
FP1GPB	FLAT PLATE	1	93
FP1GPC	FLAT PLATE	1	93
FP1GPL	FLAT PLATE	1	93
FP1TOGBB	FLAT PLATE	1	82
FP1TOGBC	FLAT PLATE	1	82
FP1TOGPB	FLAT PLATE	1	82
FP2000BB	FLAT PLATE	1	80
FP2000BC	FLAT PLATE	1	80
FP2000GM	FLAT PLATE	1	80
FP2000PB	FLAT PLATE	1	80
FP2000PC	FLAT PLATE	1	80
FP2000PL	FLAT PLATE	1	80
FP2191BB	FLAT PLATE	1	82
FP2191BC	FLAT PLATE	1	82
FP2191GM	FLAT PLATE	1	82
FP2191PB	FLAT PLATE	1	82
FP2191PC	FLAT PLATE	1	82
FP2191PL	FLAT PLATE	1	82
FP2192BB	FLAT PLATE	1	83
FP2192BC	FLAT PLATE	1	83
FP2192GM	FLAT PLATE	1	83
FP2192PB	FLAT PLATE	1	83
FP2192PC	FLAT PLATE	1	83
FP2192PL	FLAT PLATE	1	83
FP2193BB	FLAT PLATE	1	83
FP2193BC	FLAT PLATE	1	83
FP2193GM	FLAT PLATE	1	83
FP2193PB	FLAT PLATE	1	83
FP2193PC	FLAT PLATE	1	83
FP2193PL	FLAT PLATE	1	83
FP2194BB	FLAT PLATE	1	83
FP2194BC	FLAT PLATE	1	83
FP2194GM	FLAT PLATE	1	83
FP2194PB	FLAT PLATE	1	83
FP2194PC	FLAT PLATE	1	83
FP2194PL	FLAT PLATE	1	83
FP2GBB	FLAT PLATE	1	93
FP2GBC	FLAT PLATE	1	93
FP2GGM	FLAT PLATE	1	93
FP2GPB	FLAT PLATE	1	93
FP2GPC	FLAT PLATE	1	93
FP2GPL	FLAT PLATE	1	93
FP2TOGBB	FLAT PLATE	1	82
FP2TOGBC	FLAT PLATE	1	82
FP3000BB	FLAT PLATE	1	80
FP3000BC	FLAT PLATE	1	80
FP3000GM	FLAT PLATE	1	80
FP3000PB	FLAT PLATE	1	80
FP3000PC	FLAT PLATE	1	80
FP3000PL	FLAT PLATE	1	80
FP3TOGBB	FLAT PLATE	1	82
FP4000BB	FLAT PLATE	1	81
FP4000BC	FLAT PLATE	1	81
FP4000GM	FLAT PLATE	1	81
FP4000PB	FLAT PLATE	1	81
FP4000PC	FLAT PLATE	1	81
FP4000PL	FLAT PLATE	1	81
FP4100BB	FLAT PLATE	1	81
FP4100BC	FLAT PLATE	1	81
FP4100GM	FLAT PLATE	1	81
FP4100PB	FLAT PLATE	1	81
FP4100PC	FLAT PLATE	1	81
FP4100PL	FLAT PLATE	1	81
FP4GBB	FLAT PLATE	1	93
FP4GBC	FLAT PLATE	1	93
FP4GGM	FLAT PLATE	1	93
FP4GPB	FLAT PLATE	1	93
FP4GPC	FLAT PLATE	1	93
FP4GPL	FLAT PLATE	1	93
FP4TOGBB	FLAT PLATE	1	82
FP5ABB	FLAT PLATE	1	79
FP5ABC	FLAT PLATE	1	79

Code	Catalogue Section	Qty	Page
F			
FP5ABCG	FLAT PLATE	1	79
FP5ABCW	FLAT PLATE	1	79
FP5APB	FLAT PLATE	1	79
FP5APC	FLAT PLATE	1	79
FP5APCW	FLAT PLATE	1	79
FP5APLW	FLAT PLATE	1	79
FP6000BB	FLAT PLATE	1	86
FP6000BC	FLAT PLATE	1	86
FP6000GM	FLAT PLATE	1	86
FP6000PB	FLAT PLATE	1	86
FP6000PC	FLAT PLATE	1	86
FP6000PL	FLAT PLATE	1	86
FP6300BB	FLAT PLATE	1	87
FP6300BC	FLAT PLATE	1	87
FP6300FBB	FLAT PLATE	1	87
FP6300FBC	FLAT PLATE	1	87
FP6300FGM	FLAT PLATE	1	87
FP6300FPB	FLAT PLATE	1	87
FP6300FPC	FLAT PLATE	1	87
FP6300FPL	FLAT PLATE	1	87
FP6300GM	FLAT PLATE	1	87
FP6300NBB	FLAT PLATE	1	86
FP6300NBC	FLAT PLATE	1	86
FP6300NGM	FLAT PLATE	1	86
FP6300NPB	FLAT PLATE	1	86
FP6300NPC	FLAT PLATE	1	86
FP6300NPL	FLAT PLATE	1	86
FP6300PB	FLAT PLATE	1	87
FP6300PC	FLAT PLATE	1	87
FP6300PL	FLAT PLATE	1	87
FP81MNBB	FLAT PLATE	1	89
FP81MNBC	FLAT PLATE	1	89
FP81MNGM	FLAT PLATE	1	89
FP81MNPB	FLAT PLATE	1	89
FP81MNPC	FLAT PLATE	1	89
FP81MNPL	FLAT PLATE	1	89
FP82MNBB	FLAT PLATE	1	89
FP82MNBC	FLAT PLATE	1	89
FP82MNGM	FLAT PLATE	1	89
FP82MNPB	FLAT PLATE	1	89
FP82MNPC	FLAT PLATE	1	89
FP82MNPL	FLAT PLATE	1	89
FP8341BB	FLAT PLATE	1	88
FP8341BC	FLAT PLATE	1	88

Code	Catalogue Section	Qty	Page
F			
FP8341FBB	FLAT PLATE	1	88
FP8341FBC	FLAT PLATE	1	88
FP8341FGM	FLAT PLATE	1	88
FP8341FPB	FLAT PLATE	1	88
FP8341FPC	FLAT PLATE	1	88
FP8341GM	FLAT PLATE	1	88
FP8341NBB	FLAT PLATE	1	88
FP8341NBC	FLAT PLATE	1	88
FP8341NGM	FLAT PLATE	1	88
FP8341NPB	FLAT PLATE	1	88
FP8341NPC	FLAT PLATE	1	88
FP8341NPL	FLAT PLATE	1	88
FP8341PB	FLAT PLATE	1	88
FP8341PC	FLAT PLATE	1	88
FP8341PL	FLAT PLATE	1	88
FP8342BB	FLAT PLATE	1	89
FP8342BC	FLAT PLATE	1	89
FP8342PC	FLAT PLATE	1	89
FP8350BB	FLAT PLATE	1	92
FP8350BC	FLAT PLATE	1	92
FP8350GM	FLAT PLATE	1	92
FP8350PB	FLAT PLATE	1	92
FP8350PC	FLAT PLATE	1	92
FP8350PL	FLAT PLATE	1	92
FP8360BB	FLAT PLATE	1	92
FP8360BC	FLAT PLATE	1	92
FP8360GM	FLAT PLATE	1	92
FP8360PB	FLAT PLATE	1	92
FP8360PC	FLAT PLATE	1	92
FP8360PL	FLAT PLATE	1	92
FP8900BB	FLAT PLATE	1	78
FP8900BC	FLAT PLATE	1	78
FP8900BCG	FLAT PLATE	1	78
FP8900BCW	FLAT PLATE	1	78
FP8900GM	FLAT PLATE	1	78
FP8900PB	FLAT PLATE	1	78
FP8900PC	FLAT PLATE	1	78
FP8900PCG	FLAT PLATE	1	78
FP8900PCW	FLAT PLATE	1	78
FP8900PLW	FLAT PLATE	1	78
FPC6BB	FLAT PLATE	1	91
FPC6BC	FLAT PLATE	1	91
FPF2GBC	FLAT PLATE	1	93
FPF2GMB	FLAT PLATE	1	93

Code	Catalogue Section	Qty	Page
F			
FPF2GMW	FLAT PLATE	1	93
FPF4GBC	FLAT PLATE	1	93
FPF4GMB	FLAT PLATE	1	93
FPF4GMW	FLAT PLATE	1	93
FPR7000BB	FLAT PLATE	1	77
FPR7000BC	FLAT PLATE	1	77
FPR7000BCG	FLAT PLATE	1	77
FPR7000BCW	FLAT PLATE	1	77
FPR7000GM	FLAT PLATE	1	77
FPR7000PB	FLAT PLATE	1	77
FPR7000PC	FLAT PLATE	1	77
FPR7000PCG	FLAT PLATE	1	77
FPR7000PCW	FLAT PLATE	1	77
FPR7000PLW	FLAT PLATE	1	77
FPR7UBBW	FLAT PLATE	1	92
FPR7UBCW	FLAT PLATE	1	92
FPR7UMB	FLAT PLATE	1	92
FPR7UPBW	FLAT PLATE	1	92
FPR7UPCW	FLAT PLATE	1	92
FPR83MNBB	FLAT PLATE	1	90
FPR83MNBC	FLAT PLATE	1	90
FPR83MNBCG	FLAT PLATE	1	90
FPR83MNBCW	FLAT PLATE	1	90
FPR83MNGM	FLAT PLATE	1	90
FPR83MNPB	FLAT PLATE	1	90
FPR83MNPC	FLAT PLATE	1	90
FPR83MNPCG	FLAT PLATE	1	90
FPR83MNPCW	FLAT PLATE	1	90
FPR83MNPLW	FLAT PLATE	1	90
FPR9000BB	FLAT PLATE	1	77
FPR9000BC	FLAT PLATE	1	77
FPR9000BCG	FLAT PLATE	1	77
FPR9000BCW	FLAT PLATE	1	77
FPR9000GM	FLAT PLATE	1	77
FPR9000PB	FLAT PLATE	1	77
FPR9000PC	FLAT PLATE	1	77
FPR9000PCG	FLAT PLATE	1	77
FPR9000PCW	FLAT PLATE	1	77
FPR9000PLW	FLAT PLATE	1	77
FPR9940BB	FLAT PLATE	1	76
FPR9940BC	FLAT PLATE	1	76
FPR9940BCG	FLAT PLATE	1	76
FPR9940BCW	FLAT PLATE	1	76
FPR9940GM	FLAT PLATE	1	76
FPR9940PB	FLAT PLATE	1	76
FPR9940PC	FLAT PLATE	1	76
FPR9940PCG	FLAT PLATE	1	76
FPR9940PCW	FLAT PLATE	1	76
FPR9940PLW	FLAT PLATE	1	76
FPR9UBBW	FLAT PLATE	1	92
FPR9UBCW	FLAT PLATE	1	92
FPR9UMB	FLAT PLATE	1	92
FPR9UPBW	FLAT PLATE	1	92
FPR9UPCW	FLAT PLATE	1	92
FPRJ45BB	FLAT PLATE	1	91
FPRJ45BC	FLAT PLATE	1	91
FPRJ45PB	FLAT PLATE	1	91
FPRJ45PL	FLAT PLATE	1	91
FR1200	RECESSED, SURFACE, & SUSPENSION LIGHTING	1	398
FR150	DOWNLIGHTS	1	225
FR600	RECESSED, SURFACE, & SUSPENSION LIGHTING	1	398
FRNFBEZAB	DOWNLIGHTS	1	248
FRNFBEZBC	DOWNLIGHTS	1	248
FRNFBEZMB	DOWNLIGHTS	1	248
FRNFBEZPB	DOWNLIGHTS	1	248
FRNFBEZPC	DOWNLIGHTS	1	248
FRNFMW	DOWNLIGHTS	1	248
FRNIC	DOWNLIGHTS	1	248
FRNIPMW	DOWNLIGHTS	1	248
FRNTAB	DOWNLIGHTS	1	249
FRNTBC	DOWNLIGHTS	1	249
FRNTMB	DOWNLIGHTS	1	249
FRNTMW	DOWNLIGHTS	1	249
FRNTPB	DOWNLIGHTS	1	249
FRNTPC	DOWNLIGHTS	1	249
Code	Catalogue Section	Qty	Page
G			
G5DCW	LAMPS & LIGHTING ACCESSORIES	10	444
G5DWW	LAMPS & LIGHTING ACCESSORIES	10	444
G9LED10	LAMPS & LIGHTING ACCESSORIES	10	445
G9LED11	LAMPS & LIGHTING ACCESSORIES	10	445
G9LED16	LAMPS & LIGHTING ACCESSORIES	10	445
G9LED17	LAMPS & LIGHTING ACCESSORIES	10	445
G9LED18	LAMPS & LIGHTING ACCESSORIES	10	445
G9LED19	LAMPS & LIGHTING ACCESSORIES	10	445
GBD4AESC	LAMPS & LIGHTING ACCESSORIES	1	446
GBD4ASESC	LAMPS & LIGHTING ACCESSORIES	1	446
GDBLANKAB	GRID ACCESSORIES	1	176

Code	Catalogue Section	Qty	Page
G			
GDBLANKAT	GRID ACCESSORIES	1	176
GDBLANKBB	GRID ACCESSORIES	1	176
GDBLANKBC	GRID ACCESSORIES	1	176
GDBLANKMB	GRID ACCESSORIES	1	176
GDBLANKMW	GRID ACCESSORIES	1	176
GDBLANKPC	GRID ACCESSORIES	1	176
GDBLANKSB	GRID ACCESSORIES	1	176
GDBLANKU	GRID ACCESSORIES	1	150
GDBOILAB	GRID ACCESSORIES	1	176
GDBOILAT	GRID ACCESSORIES	1	176
GDBOILBB	GRID ACCESSORIES	1	176
GDBOILBC	GRID ACCESSORIES	1	176
GDBOILBN	GRID ACCESSORIES	1	176
GDBOILMB	GRID ACCESSORIES	1	176
GDBOILMW	GRID ACCESSORIES	1	176
GDBOILPC	GRID ACCESSORIES	1	176
GDBOILSB	GRID ACCESSORIES	1	176
GDBOILU	METAL CLAD	1	150
GDBOOSTAB	GRID ACCESSORIES	1	176
GDBOOSTAT	GRID ACCESSORIES	1	176
GDBOOSTBB	GRID ACCESSORIES	1	176
GDBOOSTBC	GRID ACCESSORIES	1	176
GDBOOSTBN	GRID ACCESSORIES	1	176
GDBOOSTMB	GRID ACCESSORIES	1	176
GDBOOSTMW	GRID ACCESSORIES	1	176
GDBOOSTPC	GRID ACCESSORIES	1	176
GDBOOSTSB	GRID ACCESSORIES	1	176
GDBOOSTU	METAL CLAD	1	150
GDCL1BC	GRID ACCESSORIES	1	173
GDCL1MB	GRID ACCESSORIES	1	173
GDCL1PC	GRID ACCESSORIES	1	173
GDCL2BC	GRID ACCESSORIES	1	173
GDCL2MB	GRID ACCESSORIES	1	173
GDCL2PC	GRID ACCESSORIES	1	173
GDCL3BC	GRID ACCESSORIES	1	173
GDCL3MB	GRID ACCESSORIES	1	173
GDCL3PC	GRID ACCESSORIES	1	173
GDCL4BC	GRID ACCESSORIES	1	173
GDCL4MB	GRID ACCESSORIES	1	173
GDCL4PC	GRID ACCESSORIES	1	173
GDCL6BC	GRID ACCESSORIES	1	173
GDCL6MB	GRID ACCESSORIES	1	173
GDCL6PC	GRID ACCESSORIES	1	173
GDCL8BC	GRID ACCESSORIES	1	173

Code	Catalogue Section	Qty	Page
G			
GDCL8MB	GRID ACCESSORIES	1	173
GDCL8PC	GRID ACCESSORIES	1	173
GDCL9BC	GRID ACCESSORIES	1	173
GDCOFFAB	GRID ACCESSORIES	1	176
GDCOFFAT	GRID ACCESSORIES	1	176
GDCOFFBB	GRID ACCESSORIES	1	176
GDCOFFBC	GRID ACCESSORIES	1	176
GDCOFFBN	GRID ACCESSORIES	1	176
GDCOFFMB	GRID ACCESSORIES	1	176
GDCOFFMW	GRID ACCESSORIES	1	176
GDCOFFPC	GRID ACCESSORIES	1	176
GDCOFFSB	GRID ACCESSORIES	1	176
GDCOFFU	METAL CLAD	1	150
GDCOOKAB	GRID ACCESSORIES	1	176
GDCOOKAT	GRID ACCESSORIES	1	176
GDCOOKBB	GRID ACCESSORIES	1	176
GDCOOKBC	GRID ACCESSORIES	1	176
GDCOOKBN	GRID ACCESSORIES	1	176
GDCOOKMB	GRID ACCESSORIES	1	176
GDCOOKMW	GRID ACCESSORIES	1	176
GDCOOKPC	GRID ACCESSORIES	1	176
GDCOOKSB	GRID ACCESSORIES	1	176
GDCOOKU	METAL CLAD	1	150
GDCS12AB	GRID ACCESSORIES	1	173
GDCS12BC	GRID ACCESSORIES	1	173
GDCS1AB	GRID ACCESSORIES	1	173
GDCS1BC	GRID ACCESSORIES	1	173
GDCS2AB	GRID ACCESSORIES	1	173
GDCS2BC	GRID ACCESSORIES	1	173
GDCS3AB	GRID ACCESSORIES	1	173
GDCS3BC	GRID ACCESSORIES	1	173
GDCS4AB	GRID ACCESSORIES	1	173
GDCS4BC	GRID ACCESSORIES	1	173
GDCS6AB	GRID ACCESSORIES	1	173
GDCS6BC	GRID ACCESSORIES	1	173
GDCS8AB	GRID ACCESSORIES	1	173
GDCS8BC	GRID ACCESSORIES	1	173
GDCS9AB	GRID ACCESSORIES	1	173
GDCS9BC	GRID ACCESSORIES	1	173
GDDISHAB	GRID ACCESSORIES	1	176
GDDISHAT	GRID ACCESSORIES	1	176
GDDISHBB	GRID ACCESSORIES	1	176
GDDISHBC	GRID ACCESSORIES	1	176
GDDISHBN	GRID ACCESSORIES	1	176

Code	Catalogue Section	Qty	Page
G			
GDDISHMB	GRID ACCESSORIES	1	176
GDDISHMW	GRID ACCESSORIES	1	176
GDDISHPC	GRID ACCESSORIES	1	176
GDDISHSB	GRID ACCESSORIES	1	176
GDDISHU	METAL CLAD	1	150
GDDRYAB	GRID ACCESSORIES	1	176
GDDRYAT	GRID ACCESSORIES	1	176
GDDRYBB	GRID ACCESSORIES	1	176
GDDRYBC	GRID ACCESSORIES	1	176
GDDRYBN	GRID ACCESSORIES	1	176
GDDRYMB	GRID ACCESSORIES	1	176
GDDRYMW	GRID ACCESSORIES	1	176
GDDRYPC	GRID ACCESSORIES	1	176
GDDRYSB	GRID ACCESSORIES	1	176
GDDRYU	METAL CLAD	1	150
GDF001F	GRID ACCESSORIES	1	148,157,172
GDF002F	GRID ACCESSORIES	1	148,157,172
GDFANAB	GRID ACCESSORIES	1	176
GDFANAT	GRID ACCESSORIES	1	176
GDFANBB	GRID ACCESSORIES	1	176
GDFANBC	GRID ACCESSORIES	1	176
GDFANBN	GRID ACCESSORIES	1	176
GDFANMB	GRID ACCESSORIES	1	176
GDFANMW	GRID ACCESSORIES	1	176
GDFANPC	GRID ACCESSORIES	1	176
GDFANSB	GRID ACCESSORIES	1	176
GDFANU	METAL CLAD	1	150
GDFP0012M	GRID ACCESSORIES	1	173
GDFP001BB	GRID ACCESSORIES	1	173
GDFP001BC	GRID ACCESSORIES	1	173
GDFP001M	METAL CLAD	1	148
GDFP001PC	GRID ACCESSORIES	1	173
GDFP001TB	METAL CLAD	1	157
GDFP002BB	GRID ACCESSORIES	1	173
GDFP002BC	GRID ACCESSORIES	1	173
GDFP002M	METAL CLAD	1	148
GDFP002PC	GRID ACCESSORIES	1	173
GDFP002TB	METAL CLAD	1	157
GDFP003BB	GRID ACCESSORIES	1	173
GDFP003BC	GRID ACCESSORIES	1	173
GDFP003M	METAL CLAD	1	148
GDFP003PC	GRID ACCESSORIES	1	173
GDFP003TB	METAL CLAD	1	157
GDFP004BB	GRID ACCESSORIES	1	173

Code	Catalogue Section	Qty	Page
G			
GDFP004BC	GRID ACCESSORIES	1	173
GDFP004M	METAL CLAD	1	148
GDFP004PC	GRID ACCESSORIES	1	173
GDFP004TB	METAL CLAD	1	157
GDFP006BB	GRID ACCESSORIES	1	173
GDFP006BC	GRID ACCESSORIES	1	173
GDFP006M	METAL CLAD	1	148
GDFP006PC	GRID ACCESSORIES	1	173
GDFP006TB	METAL CLAD	1	157
GDFP008BB	GRID ACCESSORIES	1	173
GDFP008BC	GRID ACCESSORIES	1	173
GDFP008M	METAL CLAD	1	148
GDFP008PC	GRID ACCESSORIES	1	173
GDFP008TB	METAL CLAD	1	157
GDFP009BB	GRID ACCESSORIES	1	173
GDFP009BC	GRID ACCESSORIES	1	173
GDFP009PC	GRID ACCESSORIES	1	173
GDFP012BB	GRID ACCESSORIES	1	173
GDFP012BC	GRID ACCESSORIES	1	173
GDFP012PC	GRID ACCESSORIES	1	173
GDFREEZERAB	GRID ACCESSORIES	1	176
GDFREEZERAT	GRID ACCESSORIES	1	176
GDFREEZERBB	GRID ACCESSORIES	1	176
GDFREEZERBC	GRID ACCESSORIES	1	176
GDFREEZERBN	GRID ACCESSORIES	1	176
GDFREEZERMB	GRID ACCESSORIES	1	176
GDFREEZERMW	GRID ACCESSORIES	1	176
GDFREEZERPC	GRID ACCESSORIES	1	176
GDFREEZERSB	GRID ACCESSORIES	1	176
GDFREEZERU	METAL CLAD	1	150
GDFRIDAB	GRID ACCESSORIES	1	176
GDFRIDAT	GRID ACCESSORIES	1	176
GDFRIDBB	GRID ACCESSORIES	1	176
GDFRIDBC	GRID ACCESSORIES	1	176
GDFRIDBN	GRID ACCESSORIES	1	176
GDFRIDGEAB	GRID ACCESSORIES	1	176
GDFRIDGEAT	GRID ACCESSORIES	1	176
GDFRIDGEBB	GRID ACCESSORIES	1	176
GDFRIDGEBC	GRID ACCESSORIES	1	176
GDFRIDGEBN	GRID ACCESSORIES	1	176
GDFRIDGEMB	GRID ACCESSORIES	1	176
GDFRIDGEMW	GRID ACCESSORIES	1	176
GDFRIDGEPC	GRID ACCESSORIES	1	176
GDFRIDGESB	GRID ACCESSORIES	1	176

Code	Catalogue Section	Qty	Page
G			
GDFRIDGEU	METAL CLAD	1	150
GDFRIDMB	GRID ACCESSORIES	1	176
GDFRIDMW	GRID ACCESSORIES	1	176
GDFRIDPC	GRID ACCESSORIES	1	176
GDFRIDSB	GRID ACCESSORIES	1	176
GDFRIDU	METAL CLAD	1	150
GDHOBAB	GRID ACCESSORIES	1	176
GDHOBAT	GRID ACCESSORIES	1	176
GDHOBBB	GRID ACCESSORIES	1	176
GDHOBBC	GRID ACCESSORIES	1	176
GDHOBBN	GRID ACCESSORIES	1	176
GDHOBMB	GRID ACCESSORIES	1	176
GDHOBMW	GRID ACCESSORIES	1	176
GDHOBPC	GRID ACCESSORIES	1	176
GDHOBSB	GRID ACCESSORIES	1	176
GDHOBU	METAL CLAD	1	150
GDKEY	GRID ACCESSORIES	10	31,149
GDL2	BOLLARDS	1	331
GDL3	BOLLARDS	1	331
GDLMK23	BOLLARDS	1	331
GDLSPIKE2	BOLLARDS	1	331
GDM001AB	GRID ACCESSORIES	1	174
GDM001AT	GRID ACCESSORIES	1	174
GDM001BB	GRID ACCESSORIES	1	174
GDM001BC	GRID ACCESSORIES	1	174
GDM001BN	GRID ACCESSORIES	1	174
GDM001MB	GRID ACCESSORIES	1	174
GDM001MW	GRID ACCESSORIES	1	174
GDM001PC	GRID ACCESSORIES	1	174
GDM001SB	GRID ACCESSORIES	1	174
GDM001U	METAL CLAD	1	149
GDM002AB	GRID ACCESSORIES	1	174
GDM002AT	GRID ACCESSORIES	1	174
GDM002BB	GRID ACCESSORIES	1	174
GDM002BC	GRID ACCESSORIES	1	174
GDM002BN	GRID ACCESSORIES	1	174
GDM002MB	GRID ACCESSORIES	1	174
GDM002MW	GRID ACCESSORIES	1	174
GDM002PC	GRID ACCESSORIES	1	174
GDM002SB	GRID ACCESSORIES	1	174
GDM002U	METAL CLAD	1	149
GDM003AB	GRID ACCESSORIES	1	174
GDM003AT	GRID ACCESSORIES	1	174
GDM003BB	GRID ACCESSORIES	1	174
GDM003BC	GRID ACCESSORIES	1	174
GDM003BN	GRID ACCESSORIES	1	174
GDM003MB	GRID ACCESSORIES	1	174
GDM003MW	GRID ACCESSORIES	1	174
GDM003PC	GRID ACCESSORIES	1	174
GDM003SB	GRID ACCESSORIES	1	174
GDM003U	METAL CLAD	1	149
GDM004AB	GRID ACCESSORIES	1	174
GDM004AT	GRID ACCESSORIES	1	174
GDM004BB	GRID ACCESSORIES	1	174
GDM004BC	GRID ACCESSORIES	1	174
GDM004BN	GRID ACCESSORIES	1	174
GDM004MB	GRID ACCESSORIES	1	174
GDM004MW	GRID ACCESSORIES	1	174
GDM004PC	GRID ACCESSORIES	1	174
GDM004SB	GRID ACCESSORIES	1	174
GDM004U	METAL CLAD	1	149
GDM005AB	GRID ACCESSORIES	1	174
GDM005AT	GRID ACCESSORIES	1	174
GDM005BB	GRID ACCESSORIES	1	174
GDM005BC	GRID ACCESSORIES	1	174
GDM005BN	GRID ACCESSORIES	1	174
GDM005MB	GRID ACCESSORIES	1	174
GDM005MW	GRID ACCESSORIES	1	174
GDM005PC	GRID ACCESSORIES	1	174
GDM005SB	GRID ACCESSORIES	1	174
GDM005U	METAL CLAD	1	149
GDM006AB	GRID ACCESSORIES	1	174
GDM006AT	GRID ACCESSORIES	1	174
GDM006BB	GRID ACCESSORIES	1	174
GDM006BC	GRID ACCESSORIES	1	174
GDM006BN	GRID ACCESSORIES	1	174
GDM006MB	GRID ACCESSORIES	1	174
GDM006MW	GRID ACCESSORIES	1	174
GDM006PC	GRID ACCESSORIES	1	174
GDM006SB	GRID ACCESSORIES	1	174
GDM006U	METAL CLAD	1	149
GDM007AB	GRID ACCESSORIES	1	174
GDM007AT	GRID ACCESSORIES	1	174
GDM007BB	GRID ACCESSORIES	1	174
GDM007BC	GRID ACCESSORIES	1	174
GDM007BN	GRID ACCESSORIES	1	174
GDM007MB	GRID ACCESSORIES	1	174
GDM007MW	GRID ACCESSORIES	1	174

Code	Catalogue Section	Qty	Page
G			
GDM007PC	GRID ACCESSORIES	1	174
GDM007SB	GRID ACCESSORIES	1	174
GDM007U	METAL CLAD	1	149
GDM008AB	GRID ACCESSORIES	1	174
GDM008AT	GRID ACCESSORIES	1	174
GDM008BB	GRID ACCESSORIES	1	174
GDM008BC	GRID ACCESSORIES	1	174
GDM008BN	GRID ACCESSORIES	1	174
GDM008MB	GRID ACCESSORIES	1	174
GDM008MW	GRID ACCESSORIES	1	174
GDM008PC	GRID ACCESSORIES	1	174
GDM008SB	GRID ACCESSORIES	1	174
GDM008U	METAL CLAD	1	149
GDM009AB	GRID ACCESSORIES	1	174
GDM009AT	GRID ACCESSORIES	1	174
GDM009BB	GRID ACCESSORIES	1	174
GDM009BC	GRID ACCESSORIES	1	174
GDM009BN	GRID ACCESSORIES	1	174
GDM009MB	GRID ACCESSORIES	1	174
GDM009PC	GRID ACCESSORIES	1	174
GDM009SB	GRID ACCESSORIES	1	174
GDM009U	GRID ACCESSORIES	1	174
GDM010AB	GRID ACCESSORIES	1	174
GDM010AT	GRID ACCESSORIES	1	174
GDM010BB	GRID ACCESSORIES	1	174
GDM010BC	GRID ACCESSORIES	1	174
GDM010BN	GRID ACCESSORIES	1	174
GDM010MB	GRID ACCESSORIES	1	174
GDM010MW	GRID ACCESSORIES	1	174
GDM010PC	GRID ACCESSORIES	1	174
GDM010SB	GRID ACCESSORIES	1	174
GDM010U	METAL CLAD	1	149
GDM011AB	GRID ACCESSORIES	1	175
GDM011AT	GRID ACCESSORIES	1	175
GDM011BB	GRID ACCESSORIES	1	175
GDM011BC	GRID ACCESSORIES	1	175
GDM011BN	GRID ACCESSORIES	1	175
GDM011MB	GRID ACCESSORIES	1	175
GDM011MW	GRID ACCESSORIES	1	175
GDM011PC	GRID ACCESSORIES	1	175
GDM011SB	GRID ACCESSORIES	1	175
GDM011U	METAL CLAD	1	150
GDM012AB	GRID ACCESSORIES	1	175
GDM012AT	GRID ACCESSORIES	1	175

Code	Catalogue Section	Qty	Page
G			
GDM012BB	GRID ACCESSORIES	1	175
GDM012BC	GRID ACCESSORIES	1	175
GDM012BN	GRID ACCESSORIES	1	175
GDM012MB	GRID ACCESSORIES	1	175
GDM012MW	GRID ACCESSORIES	1	175
GDM012PC	GRID ACCESSORIES	1	175
GDM012SB	GRID ACCESSORIES	1	175
GDM012U	METAL CLAD	1	150
GDM013AB	GRID ACCESSORIES	1	175
GDM013AT	GRID ACCESSORIES	1	175
GDM013BB	GRID ACCESSORIES	1	175
GDM013BC	GRID ACCESSORIES	1	175
GDM013BN	GRID ACCESSORIES	1	175
GDM013MB	GRID ACCESSORIES	1	175
GDM013MW	GRID ACCESSORIES	1	175
GDM013PC	GRID ACCESSORIES	1	175
GDM013SB	GRID ACCESSORIES	1	175
GDM013U	METAL CLAD	1	150
GDM014AT	GRID ACCESSORIES	1	175
GDM014BC	GRID ACCESSORIES	1	175
GDM014BN	GRID ACCESSORIES	1	175
GDM014PC	GRID ACCESSORIES	1	175
GDM014SB	GRID ACCESSORIES	1	175
GDM014U	METAL CLAD	1	149
GDM015PC	GRID ACCESSORIES	1	175
GDM016AB	GRID ACCESSORIES	1	175
GDM016AT	GRID ACCESSORIES	1	175
GDM016BB	GRID ACCESSORIES	1	175
GDM016BC	GRID ACCESSORIES	1	175
GDM016BN	GRID ACCESSORIES	1	175
GDM016MB	GRID ACCESSORIES	1	175
GDM016MW	GRID ACCESSORIES	1	175
GDM016PC	GRID ACCESSORIES	1	175
GDM016SB	GRID ACCESSORIES	1	175
GDM016U	METAL CLAD	1	150
GDM017	METAL CLAD	1	150,175
GDM019	METAL CLAD	1	150,175
GDM01TOGAB	GRID ACCESSORIES	1	174
GDM01TOGAT	GRID ACCESSORIES	1	174
GDM01TOGBB	GRID ACCESSORIES	1	174
GDM01TOGBC	GRID ACCESSORIES	1	174
GDM01TOGBN	GRID ACCESSORIES	1	174
GDM01TOGMB	GRID ACCESSORIES	1	174
GDM01TOGMW	GRID ACCESSORIES	1	174

Code	Catalogue Section	Qty	Page
G			
GDM01TOGPC	GRID ACCESSORIES	1	174
GDM01TOGSB	GRID ACCESSORIES	1	174
GDM020AB	GRID ACCESSORIES	1	175
GDM020AT	GRID ACCESSORIES	1	175
GDM020BB	GRID ACCESSORIES	1	175
GDM020BC	GRID ACCESSORIES	1	175
GDM020BN	GRID ACCESSORIES	1	175
GDM020MB	GRID ACCESSORIES	1	175
GDM020MW	GRID ACCESSORIES	1	175
GDM020PC	GRID ACCESSORIES	1	175
GDM020SB	GRID ACCESSORIES	1	175
GDM020U	METAL CLAD	1	149
GDM021AB	GRID ACCESSORIES	1	175
GDM021AT	GRID ACCESSORIES	1	175
GDM021BB	GRID ACCESSORIES	1	175
GDM021BC	GRID ACCESSORIES	1	175
GDM021BN	GRID ACCESSORIES	1	175
GDM021MB	GRID ACCESSORIES	1	175
GDM021MW	GRID ACCESSORIES	1	175
GDM021PC	GRID ACCESSORIES	1	175
GDM021SB	GRID ACCESSORIES	1	175
GDM021U	METAL CLAD	1	149
GDM022AB	GRID ACCESSORIES	1	175
GDM022AT	GRID ACCESSORIES	1	175
GDM022BB	GRID ACCESSORIES	1	175
GDM022BC	GRID ACCESSORIES	1	175
GDM022BN	GRID ACCESSORIES	1	175
GDM022MB	GRID ACCESSORIES	1	175
GDM022MW	GRID ACCESSORIES	1	175
GDM022PC	GRID ACCESSORIES	1	175
GDM022SB	GRID ACCESSORIES	1	175
GDM022U	METAL CLAD	1	149
GDM023	METAL CLAD	1	149,174
GDM02TOGAB	GRID ACCESSORIES	1	174
GDM02TOGAT	GRID ACCESSORIES	1	174
GDM02TOGBB	GRID ACCESSORIES	1	174
GDM02TOGBC	GRID ACCESSORIES	1	174
GDM02TOGBN	GRID ACCESSORIES	1	174
GDM02TOGMB	GRID ACCESSORIES	1	174
GDM02TOGMW	GRID ACCESSORIES	1	174
GDM02TOGPC	GRID ACCESSORIES	1	174
GDM02TOGSB	GRID ACCESSORIES	1	174
GDM05TOGAB	GRID ACCESSORIES	1	174
GDM05TOGAT	GRID ACCESSORIES	1	174

Code	Catalogue Section	Qty	Page
G			
GDM05TOGBB	GRID ACCESSORIES	1	174
GDM05TOGBC	GRID ACCESSORIES	1	174
GDM05TOGBN	GRID ACCESSORIES	1	174
GDM05TOGMB	GRID ACCESSORIES	1	174
GDM05TOGMW	GRID ACCESSORIES	1	174
GDM05TOGPC	GRID ACCESSORIES	1	174
GDM05TOGSB	GRID ACCESSORIES	1	174
GDM150IAB	GRID ACCESSORIES	1	175
GDM150IAT	GRID ACCESSORIES	1	175
GDM150IBB	GRID ACCESSORIES	1	175
GDM150IBC	GRID ACCESSORIES	1	175
GDM150IBN	GRID ACCESSORIES	1	175
GDM150IMB	GRID ACCESSORIES	1	175
GDM150IMW	GRID ACCESSORIES	1	175
GDM150IPC	GRID ACCESSORIES	1	175
GDM150ISB	GRID ACCESSORIES	1	175
GDM150IU	GRID ACCESSORIES	1	149
GDMICROAB	GRID ACCESSORIES	1	176
GDMICROAT	GRID ACCESSORIES	1	176
GDMICROBB	GRID ACCESSORIES	1	176
GDMICROBC	GRID ACCESSORIES	1	176
GDMICROBN	GRID ACCESSORIES	1	176
GDMICROMB	GRID ACCESSORIES	1	176
GDMICROMW	GRID ACCESSORIES	1	176
GDMICROPC	GRID ACCESSORIES	1	176
GDMICROSB	GRID ACCESSORIES	1	176
GDMICROU	METAL CLAD	1	150
GDOVENAB	GRID ACCESSORIES	1	176
GDOVENAT	GRID ACCESSORIES	1	176
GDOVENBB	GRID ACCESSORIES	1	176
GDOVENBC	GRID ACCESSORIES	1	176
GDOVENBN	GRID ACCESSORIES	1	176
GDOVENMB	GRID ACCESSORIES	1	176
GDOVENMW	GRID ACCESSORIES	1	176
GDOVENPC	GRID ACCESSORIES	1	176
GDOVENSB	GRID ACCESSORIES	1	176
GDOVENU	METAL CLAD	1	150
GDS001F	GRID ACCESSORIES	1	172
GDS002F	GRID ACCESSORIES	1	172
GDS003F	GRID ACCESSORIES	1	172
GDS004F	GRID ACCESSORIES	1	172
GDSF001AB	GRID ACCESSORIES	1	172
GDSF001AT	GRID ACCESSORIES	1	172
GDSF001BC	GRID ACCESSORIES	1	172

Code	Catalogue Section	Qty	Page
G			
GDSF001BN	GRID ACCESSORIES	1	172
GDSF001MB	GRID ACCESSORIES	1	172
GDSF001MW	GRID ACCESSORIES	1	172
GDSF001PC	GRID ACCESSORIES	1	172
GDSF001SB	GRID ACCESSORIES	1	172
GDSF002AB	GRID ACCESSORIES	1	172
GDSF002AT	GRID ACCESSORIES	1	172
GDSF002BC	GRID ACCESSORIES	1	172
GDSF002BN	GRID ACCESSORIES	1	172
GDSF002MB	GRID ACCESSORIES	1	172
GDSF002MW	GRID ACCESSORIES	1	172
GDSF002PC	GRID ACCESSORIES	1	172
GDSF002SB	GRID ACCESSORIES	1	172
GDSF003AB	GRID ACCESSORIES	1	172
GDSF003AT	GRID ACCESSORIES	1	172
GDSF003BC	GRID ACCESSORIES	1	172
GDSF003BN	GRID ACCESSORIES	1	172
GDSF003MB	GRID ACCESSORIES	1	172
GDSF003MW	GRID ACCESSORIES	1	172
GDSF003PC	GRID ACCESSORIES	1	172
GDSF003SB	GRID ACCESSORIES	1	172
GDSF004AB	GRID ACCESSORIES	1	172
GDSF004AT	GRID ACCESSORIES	1	172
GDSF004BC	GRID ACCESSORIES	1	172
GDSF004BN	GRID ACCESSORIES	1	172
GDSF004MB	GRID ACCESSORIES	1	172
GDSF004MW	GRID ACCESSORIES	1	172
GDSF004PC	GRID ACCESSORIES	1	172
GDSF004SB	GRID ACCESSORIES	1	172
GDSF006AB	GRID ACCESSORIES	1	172
GDSF006AT	GRID ACCESSORIES	1	172
GDSF006BC	GRID ACCESSORIES	1	172
GDSF006BN	GRID ACCESSORIES	1	172
GDSF006MB	GRID ACCESSORIES	1	172
GDSF006MW	GRID ACCESSORIES	1	172
GDSF006PC	GRID ACCESSORIES	1	172
GDSF006SB	GRID ACCESSORIES	1	172
GDSF008AB	GRID ACCESSORIES	1	172
GDSF008AT	GRID ACCESSORIES	1	172
GDSF008BC	GRID ACCESSORIES	1	172
GDSF008BN	GRID ACCESSORIES	1	172
GDSF008MB	GRID ACCESSORIES	1	172
GDSF008MW	GRID ACCESSORIES	1	172
GDSF008PC	GRID ACCESSORIES	1	172

Code	Catalogue Section	Qty	Page
G			
GDSF008SB	GRID ACCESSORIES	1	172
GDSF009AT	GRID ACCESSORIES	1	172
GDSF009BC	GRID ACCESSORIES	1	172
GDSF009BN	GRID ACCESSORIES	1	172
GDSF009MB	GRID ACCESSORIES	1	172
GDSF009MW	GRID ACCESSORIES	1	172
GDSF009PC	GRID ACCESSORIES	1	172
GDSF009SB	GRID ACCESSORIES	1	172
GDSF012AT	GRID ACCESSORIES	1	172
GDSF012BC	GRID ACCESSORIES	1	172
GDSF012BN	GRID ACCESSORIES	1	172
GDSF012MW	GRID ACCESSORIES	1	172
GDSF012PC	GRID ACCESSORIES	1	172
GDSF012SB	GRID ACCESSORIES	1	172
GDSG68G	WIRING BASICS	1	193
GDSG68M	METAL CLAD	1	148
GDSG68TB	METAL CLAD	1	156
GDSG912G	WIRING BASICS	1	193
GDSG912M	GRID ACCESSORIES	1	193
GDWARMAB	GRID ACCESSORIES	1	176
GDWARMAT	GRID ACCESSORIES	1	176
GDWARMBB	GRID ACCESSORIES	1	176
GDWARMBC	GRID ACCESSORIES	1	176
GDWARMBN	GRID ACCESSORIES	1	176
GDWARMMB	GRID ACCESSORIES	1	176
GDWARMMW	GRID ACCESSORIES	1	176
GDWARMPC	GRID ACCESSORIES	1	176
GDWARMSB	GRID ACCESSORIES	1	176
GDWARMU	METAL CLAD	1	150
GDWASHAB	GRID ACCESSORIES	1	176
GDWASHAT	GRID ACCESSORIES	1	176
GDWASHBB	GRID ACCESSORIES	1	176
GDWASHBC	GRID ACCESSORIES	1	176
GDWASHBN	GRID ACCESSORIES	1	176
GDWASHMB	GRID ACCESSORIES	1	176
GDWASHMW	GRID ACCESSORIES	1	176
GDWASHPC	GRID ACCESSORIES	1	176
GDWASHSB	GRID ACCESSORIES	1	176
GDWASHU	METAL CLAD	1	150
GDWASTEAB	GRID ACCESSORIES	1	176
GDWASTEAT	GRID ACCESSORIES	1	176
GDWASTEBB	GRID ACCESSORIES	1	176
GDWASTEBC	GRID ACCESSORIES	1	176
GDWASTEBN	GRID ACCESSORIES	1	176

Code	Catalogue Section	Qty	Page
G			
GDWASTEMB	GRID ACCESSORIES	1	176
GDWASTEMW	GRID ACCESSORIES	1	176
GDWASTEPC	GRID ACCESSORIES	1	176
GDWASTESB	GRID ACCESSORIES	1	176
GDWASTEU	METAL CLAD	1	150
GDWINEAB	GRID ACCESSORIES	1	176
GDWINEAT	GRID ACCESSORIES	1	176
GDWINEBB	GRID ACCESSORIES	1	176
GDWINEBC	GRID ACCESSORIES	1	176
GDWINEBN	GRID ACCESSORIES	1	176
GDWINEMB	GRID ACCESSORIES	1	176
GDWINEMW	GRID ACCESSORIES	1	176
GDWINEPC	GRID ACCESSORIES	1	176
GDWINESB	GRID ACCESSORIES	1	176
GDWINEU	METAL CLAD	1	150
GLS9BCKW	SMART HOME	1	459
GLS9ESKW	SMART HOME	1	459
GLSBC8CW	LAMPS & LIGHTING ACCESSORIES	50	446
GLSBC8WW	LAMPS & LIGHTING ACCESSORIES	50	446
GLSD8ABCC	LAMPS & LIGHTING ACCESSORIES	1	446
GLSD8AESC	LAMPS & LIGHTING ACCESSORIES	1	446
GRIDCAPCOVERS	WIRING BASICS	100	30
GSE225	WIRING BASICS	5	193
GSE25	WIRING BASICS	10	193
GSK16	WIRING BASICS	20	193
GSK194F	WIRING BASICS	1	193
GSK194MM	WIRING BASICS	1	29
GSK225	WIRING BASICS	5	193
GSK235	WIRING BASICS	5	193
GSK235D	WIRING BASICS	5	193
GSK247	WIRING BASICS	5	193
GSK25	WIRING BASICS	10	193
GSK27	WIRING BASICS	20	193
GSK298F	WIRING BASICS	1	193
GSK298MM	WIRING BASICS	1	29
GSK335	WIRING BASICS	5	193
GSK335D	WIRING BASICS	5	193
GSK347D	WIRING BASICS	5	193
GSK35	WIRING BASICS	10	193
GSK47	WIRING BASICS	10	193
GU10B5CW	LAMPS & LIGHTING ACCESSORIES	100	445
GU10B5WW	LAMPS & LIGHTING ACCESSORIES	100	445
GU10SPIKE	SPIKE LIGHTS	1	338
GU10SPIKEBK	SPIKE LIGHTS	1	338
GU10SPIKEL	SPIKE LIGHTS	1	338
GU5KWB	LAMPS & LIGHTING ACCESSORIES	1	459
GU5PDCW	LAMPS & LIGHTING ACCESSORIES	10	444
GU5PDDL	LAMPS & LIGHTING ACCESSORIES	10	444
GU5PDWW	LAMPS & LIGHTING ACCESSORIES	10	444
GU7PDCW	LAMPS & LIGHTING ACCESSORIES	10	444
GU7PDWW	LAMPS & LIGHTING ACCESSORIES	10	444
GUSPBK	SPIKE LIGHTS	1	336
GUSPIKER	SPIKE LIGHTS	1	337
GUSPIKES	SPIKE LIGHTS	1	337
Code	Catalogue Section	Qty	Page
H			
HCBC	DOWNLIGHTS	1	225
HCC	DOWNLIGHTS	1	225
HCW	DOWNLIGHTS	1	225
HEX2	NON-CORROSIVE	1	417
HEX21	NON-CORROSIVE	1	417
HEX4	NON-CORROSIVE	1	417
HEX5	NON-CORROSIVE	1	417
HEX51	NON-CORROSIVE	1	417
HEX6	NON-CORROSIVE	1	417
HEXMCF4	NON-CORROSIVE	1	419
HEXMCF5	NON-CORROSIVE	1	419
HEXMCF6	NON-CORROSIVE	1	419
HEXSCW2	NON-CORROSIVE	1	418
HEXSCW4	NON-CORROSIVE	1	418
HEXSCW5	NON-CORROSIVE	1	418
HEXSCW6	NON-CORROSIVE	1	418
HPLED1W	GROUNDLIGHTS & DECK LIGHTING	1	349
HS20MM	WIRING BASICS	1	203
HS25MM	WIRING BASICS	1	203
HS32MM	WIRING BASICS	1	203
HS38MM	WIRING BASICS	1	203
HS51MM	WIRING BASICS	1	203
HS60MM	WIRING BASICS	1	203
HS65MM	WIRING BASICS	1	203
HS70MM	WIRING BASICS	1	203
HS72MM	WIRING BASICS	1	203
HS75MM	WIRING BASICS	1	203
HS80MM	WIRING BASICS	1	203
HS85MM	WIRING BASICS	1	203
HS90MM	WIRING BASICS	1	203
HSARBORL	WIRING BASICS	1	203
HSARBORS	WIRING BASICS	1	203

Code	Catalogue Section	Qty	Page
H			
HSPILOTDB5	WIRING BASICS	1	203
Code	Catalogue Section	Qty	Page
I			
IN001	ADDITIONAL HARDWARE	1	204
IN0010	ADDITIONAL HARDWARE	1	204
IN0011	ADDITIONAL HARDWARE	1	204
IN0012	ADDITIONAL HARDWARE	1	204
IN0013	ADDITIONAL HARDWARE	1	204
IN0014	ADDITIONAL HARDWARE	1	205
IN0015	ADDITIONAL HARDWARE	1	205
IN0016	ADDITIONAL HARDWARE	1	205
IN0017	ADDITIONAL HARDWARE	1	205
IN0018	ADDITIONAL HARDWARE	1	205
IN0019	ADDITIONAL HARDWARE	1	205
IN002	ADDITIONAL HARDWARE	1	204
IN0020	ADDITIONAL HARDWARE	1	205
IN0021	ADDITIONAL HARDWARE	1	204
IN0022	ADDITIONAL HARDWARE	1	204
IN0023	ADDITIONAL HARDWARE	1	204
IN0025	ADDITIONAL HARDWARE	1	205
IN0026	ADDITIONAL HARDWARE	1	205
IN0027	ADDITIONAL HARDWARE	1	205
IN003	ADDITIONAL HARDWARE	1	204
IN004	ADDITIONAL HARDWARE	1	204
IN005	ADDITIONAL HARDWARE	1	204
IN006	ADDITIONAL HARDWARE	1	204
IN007	ADDITIONAL HARDWARE	1	204
IN008	ADDITIONAL HARDWARE	1	204
IN009	ADDITIONAL HARDWARE	1	204
IP68JBS	LAMPS & LIGHTING ACCESSORIES	1	448
Code	Catalogue Section	Qty	Page
J			
JB0010BK	WEATHERPROOF	1	187
JB0011	WEATHERPROOF	1	188
JB0012	WEATHERPROOF	1	188
JB0013	WEATHERPROOF	1	188
JB0014	WEATHERPROOF	1	189
JB0015	WEATHERPROOF	1	189
JB0016	WEATHERPROOF	1	189
JB0018	WEATHERPROOF	1	189
JB002	WEATHERPROOF	1	188
JB003	WEATHERPROOF	1	188
JB004	WEATHERPROOF	1	188
JB006	WEATHERPROOF	10	188
Code	Catalogue Section	Qty	Page
J			
JB007BK	WEATHERPROOF	1	187
JB008BK	WEATHERPROOF	1	187
JB009BK	WEATHERPROOF	1	187
JB55BK	WEATHERPROOF	1	187
Code	Catalogue Section	Qty	Page
K			
KA12CW	COMMERCIAL DOWNLIGHTS	1	387
KA12CWTD	COMMERCIAL DOWNLIGHTS	1	387
KA18CW	COMMERCIAL DOWNLIGHTS	1	387
KA18CWTD	COMMERCIAL DOWNLIGHTS	1	387
KA24CW	COMMERCIAL DOWNLIGHTS	1	387
KA24CWTD	COMMERCIAL DOWNLIGHTS	1	387
KA6CW	COMMERCIAL DOWNLIGHTS	1	387
KA6CWTD	COMMERCIAL DOWNLIGHTS	1	387
KIT16B	GROUNDLIGHTS & DECK LIGHTING	1	349
KIT16W	GROUNDLIGHTS & DECK LIGHTING	1	349
KIT16WW	GROUNDLIGHTS & DECK LIGHTING	1	349
KL1MBK	CEILING & WALL LIGHTS	1	254
KL1MW	CEILING & WALL LIGHTS	1	254
KL2MBK	CEILING & WALL LIGHTS	1	254
KL2MW	CEILING & WALL LIGHTS	1	254
KL3MBK	CEILING & WALL LIGHTS	1	254
KL3MW	CEILING & WALL LIGHTS	1	254
Code	Catalogue Section	Qty	Page
L			
LANT1	OUTDOOR WALL LIGHTS	1	320
LANT1BKP	OUTDOOR WALL LIGHTS	1	320
LANT1W	OUTDOOR WALL LIGHTS	1	320
LANT1WP	OUTDOOR WALL LIGHTS	1	320
LANT2	OUTDOOR WALL LIGHTS	1	320
LANT2W	OUTDOOR WALL LIGHTS	1	320
LANT3	OUTDOOR WALL LIGHTS	1	320
LANT3BKP	OUTDOOR WALL LIGHTS	1	320
LANT3W	OUTDOOR WALL LIGHTS	1	320
LANT3WP	OUTDOOR WALL LIGHTS	1	320
LANT4	OUTDOOR WALL LIGHTS	1	320
LANT4W	OUTDOOR WALL LIGHTS	1	320
LANTBK	OUTDOOR WALL LIGHTS	1	321
LANTSS	OUTDOOR WALL LIGHTS	1	321
LDGL5	GROUNDLIGHTS & DECK LIGHTING	1	347
LDGL6	GROUNDLIGHTS & DECK LIGHTING	1	347
LDGL9	GROUNDLIGHTS & DECK LIGHTING	1	347
LEDAD36	UNDER CABINET LIGHTING	1	449
LEDBAT17	COMMERCIAL BATTENS	1	407

Code	Catalogue Section	Qty	Page
L			
LEDBAT22	COMMERCIAL BATTENS	1	407
LEDBAT26	COMMERCIAL BATTENS	1	407
LEDBAT9	COMMERCIAL BATTENS	1	407
LEDFRA1	LED FLEX	1	305
LEDFRA6	LED FLEX	1	305
LEDFRA7	LED FLEX	1	305
LEDFRA8	LED FLEX	1	305
LEDFRA9	LED FLEX	1	305
LEDFWIFI	SMART HOME	1	305,458
LEDGL3D	GROUNDLIGHTS & DECK LIGHTING	1	345
LEDGL3W	GROUNDLIGHTS & DECK LIGHTING	1	345
LEDM06B	GROUNDLIGHTS & DECK LIGHTING	1	284,348
LEDM06W	GROUNDLIGHTS & DECK LIGHTING	1	284,348
LEDM06WW	GROUNDLIGHTS & DECK LIGHTING	1	284,348
LEDM07B	GROUNDLIGHTS & DECK LIGHTING	1	345
LEDM07W	GROUNDLIGHTS & DECK LIGHTING	1	345
LEDM08B1	GROUNDLIGHTS & DECK LIGHTING	1	346
LEDM08W1	GROUNDLIGHTS & DECK LIGHTING	1	346
LEDM08WW1	GROUNDLIGHTS & DECK LIGHTING	1	346
LEDM09CW	GROUNDLIGHTS & DECK LIGHTING	1	346
LEDM09WW	GROUNDLIGHTS & DECK LIGHTING	1	346
LFC24CCT	LED FLEX	1	300
LFC24CCT1M	LED FLEX	1	300
LFC24CCT3M	LED FLEX	1	300
LFC24CCT5M	LED FLEX	1	300
LFC24CW	LED FLEX	1	299
LFC24CW1M	LED FLEX	1	299
LFC24CW3M	LED FLEX	1	299
LFC24CW5M	LED FLEX	1	299
LFC24DL	LED FLEX	1	299
LFC24DL1M	LED FLEX	1	299
LFC24DL3M	LED FLEX	1	299
LFC24DL5M	LED FLEX	1	299
LFC24HLCW	LED FLEX	1	301
LFC24HLCW1M	LED FLEX	1	301
LFC24HLCW3M	LED FLEX	1	301
LFC24HLCW5M	LED FLEX	1	301
LFC24HLDL	LED FLEX	1	301
LFC24HLDL1M	LED FLEX	1	301
LFC24HLDL3M	LED FLEX	1	301
LFC24HLDL5M	LED FLEX	1	301
LFC24HLWW	LED FLEX	1	301
LFC24HLWW1M	LED FLEX	1	301
LFC24HLWW3M	LED FLEX	1	301

Code	Catalogue Section	Qty	Page
L			
LFC24HLWW5M	LED FLEX	1	301
LFC24RGB	LED FLEX	1	300
LFC24RGB1M	LED FLEX	1	300
LFC24RGB3M	LED FLEX	1	300
LFC24RGB5M	LED FLEX	1	300
LFC24RGBW	LED FLEX	1	300
LFC24RGBW1M	LED FLEX	1	300
LFC24RGBW3M	LED FLEX	1	300
LFC24RGBW5M	LED FLEX	1	300
LFC24WW	LED FLEX	1	299
LFC24WW1M	LED FLEX	1	299
LFC24WW3M	LED FLEX	1	299
LFC24WW5M	LED FLEX	1	299
LFCCAP	LED FLEX	1	303
LFCFIX10	LED FLEX	1	303
LFCFIX12	LED FLEX	1	303
LFCON2FX	LED FLEX	1	302
LFCON2P	LED FLEX	1	302
LFCON2SS	LED FLEX	1	302
LFCON2T	LED FLEX	1	302
LFCON2WS	LED FLEX	1	302
LFCON2X	LED FLEX	1	302
LFCON4FX	LED FLEX	1	302
LFCON5FX	LED FLEX	1	302
LFCONIP2FX	LED FLEX	1	303
LFCONIP2SS	LED FLEX	1	303
LFCONIP2WS	LED FLEX	1	303
LFCONIP4FX	LED FLEX	1	303
LFCONIPG	LED FLEX	1	303
LFCONSS2P	LED FLEX	1	302
LFX512CW	LED FLEX	1	298
LFX512DL	LED FLEX	1	298
LFX512WW	LED FLEX	1	298
LH01	LAMPS & LIGHTING ACCESSORIES	50	451
LH02	LAMPS & LIGHTING ACCESSORIES	50	451
LH03	LAMPS & LIGHTING ACCESSORIES	50	451
LPANKIT	RECESSED, SURFACE, & SUSPENSION LIGHTING	1	396
LPANKIT2	RECESSED, SURFACE, & SUSPENSION LIGHTING	1	396
LPANS	RECESSED, SURFACE, & SUSPENSION LIGHTING	1	396
LSC1	LAMPS & LIGHTING ACCESSORIES	10	451
LUM40	LAMPS & LIGHTING ACCESSORIES	1	227,442
LUM70	LAMPS & LIGHTING ACCESSORIES	1	227,442
LUMI6060PRO	RECESSED, SURFACE, & SUSPENSION LIGHTING	1	396
LUMI6060PROAD	RECESSED, SURFACE, & SUSPENSION LIGHTING	1	396

Code	Catalogue Section	Qty	Page
L			
LUMI6060PRODALI	RECESSED, SURFACE, & SUSPENSION LIGHTING	1	396
LVC1	LAMPS & LIGHTING ACCESSORIES	100	451
LWB165	HIGH BAY / LOW BAY	1	425
LWB90	HIGH BAY / LOW BAY	1	425
LWBEMKIT	HIGH BAY / LOW BAY	1	425
LWBMIC	HIGH BAY / LOW BAY	1	425
LWBMOU	HIGH BAY / LOW BAY	1	425
LWBPIR	HIGH BAY / LOW BAY	1	425
LWR2G	OUTDOOR WALL LIGHTS	1	323
LWR4G	OUTDOOR WALL LIGHTS	1	323
LWS2G	OUTDOOR WALL LIGHTS	1	323
LWS4G	OUTDOOR WALL LIGHTS	1	323
LYN1BK	CEILING & WALL LIGHTS	1	258
LYN1W	CEILING & WALL LIGHTS	1	258
LYN2BK	CEILING & WALL LIGHTS	1	258
LYN2W	CEILING & WALL LIGHTS	1	258
Code	Catalogue Section	Qty	Page
M			
M1100	METAL CLAD	1	146
M1100TB	METAL CLAD	1	154
M1G	METAL CLAD	1	148
M1GTB	METAL CLAD	1	156
M2000	METAL CLAD	1	146
M2000TB	METAL CLAD	1	154
M2G	METAL CLAD	1	148
M3000	METAL CLAD	1	146
M3000TB	METAL CLAD	1	154
M4000	METAL CLAD	1	146
M4000TB	METAL CLAD	1	154
M4G	METAL CLAD	1	148
M6000	METAL CLAD	1	146
M6000F	METAL CLAD	1	146
M6000FTB	METAL CLAD	1	154
M6000N	METAL CLAD	1	146
M6000NF	METAL CLAD	1	146
M6000NFTB	METAL CLAD	1	154
M6000NTB	METAL CLAD	1	154
M6000TB	METAL CLAD	1	154
M6300	METAL CLAD	1	146
M6300F	METAL CLAD	1	146
M6300FTB	METAL CLAD	1	154
M6300N	METAL CLAD	1	146
M6300NF	METAL CLAD	1	146
M6300NFTB	METAL CLAD	1	154

Code	Catalogue Section	Qty	Page
M			
M6300NTB	METAL CLAD	1	154
M6RCD	METAL CLAD	1	146
M7300	METAL CLAD	1	147
M8331N	METAL CLAD	1	147
M8331NTB	METAL CLAD	1	155
M8332N	METAL CLAD	1	147
M8341	METAL CLAD	1	146
M8341L	METAL CLAD	1	146
M8341N	METAL CLAD	1	146
M8341NF	METAL CLAD	1	146
M8341NFTB	METAL CLAD	1	155
M8341NTB	METAL CLAD	1	155
M8341TB	METAL CLAD	1	155
M8500	METAL CLAD	1	147
M8500TB	METAL CLAD	1	156
M8600	METAL CLAD	1	147
M8600TB	METAL CLAD	1	156
M8700	METAL CLAD	1	148
M8700TB	METAL CLAD	1	156
M8900	METAL CLAD	1	148
M8900TB	METAL CLAD	1	156
M9LOCKN	METAL CLAD	1	145
M9RCD	METAL CLAD	1	145
MC6	METAL CLAD	1	147
MC6TB	METAL CLAD	1	155
ML500	BATHROOM	1	282
MLC6045SD	BATHROOM	1	282
MLR6045SD	BATHROOM	1	281
MLRCTM2	BATHROOM	1	281
MODEMKIT2	BATTENS	1	402,410-412,418
MODEMKIT2110	BATTENS	1	417
MODEMKITDA	BATTENS	1	412
MODMWS	BATTENS	1	402,410-412,418
MODMWS110	BATTENS	1	417
MR7000	METAL CLAD	1	145
MR7000N	METAL CLAD	1	145
MR7000NTB	METAL CLAD	1	153
MR7000TB	METAL CLAD	1	153
MR7000U	METAL CLAD	1	145
MR7000UTB	METAL CLAD	1	153
MR8333N	METAL CLAD	1	147
MR8333NTB	METAL CLAD	1	155
MR9000	METAL CLAD	1	145
MR9000N	METAL CLAD	1	145

Code	Catalogue Section	Qty	Page
M			
MR9000NTB	METAL CLAD	1	153
MR9000TB	METAL CLAD	1	153
MR9000U	METAL CLAD	1	145
MR9000UTB	METAL CLAD	1	153
MR9124	METAL CLAD	1	145
MR9940	METAL CLAD	1	145
MR9940TB	METAL CLAD	1	153
MRBLED	RECESSED, SURFACE, & SUSPENSION LIGHTING	1	398
MRJ45	METAL CLAD	1	147
Code	Catalogue Section	Qty	Page
N			
NESGU	FLOODLIGHTS	1	359
NESGUPIR	FLOODLIGHTS	1	359
NET12BK	DATACOMMS	1	163
NET12GY	DATACOMMS	1	163
NET12WBK	DATACOMMS	1	163
NET12WGY	DATACOMMS	1	163
NET12WH	DATACOMMS	1	163
NET12WWH	DATACOMMS	1	163
NET13BK	DATACOMMS	1	163
NET13GY	DATACOMMS	1	163
NET13WH	DATACOMMS	1	163
NET16SBK	DATACOMMS	1	163
NET16SGY	DATACOMMS	1	163
NET16SWH	DATACOMMS	1	163
NET1GWH	MOULDED - SQUARE EDGE	1	14
NET2BK	DATACOMMS	1	163
NET2GWH	MOULDED - SQUARE EDGE	1	14
NET2GY	DATACOMMS	1	163
NET2WBK	DATACOMMS	1	14
NET2WGY	DATACOMMS	1	14
NET2WH	DATACOMMS	1	14
NET4GWH	MOULDED - SQUARE EDGE	1	14
NET5ABK	DATACOMMS	1	163
NET5AGY	DATACOMMS	1	163
NET5AWH	DATACOMMS	1	163
NETBR1G	DATACOMMS	1	166
NETBR1GGY	DATACOMMS	1	166
NETBR1GW	DATACOMMS	1	166
NETBR2G	DATACOMMS	1	166
NETBR2GGY	DATACOMMS	1	166
NETBR2GW	DATACOMMS	1	166
NETBR4G	DATACOMMS	1	166
NETBR4GGY	DATACOMMS	1	166

Code	Catalogue Section	Qty	Page
N			
NETBR4GW	DATACOMMS	1	166
NETBRUSH2	DATACOMMS	1	165
NETBRUSH4	DATACOMMS	1	165
NETBTMBK	DATACOMMS	1	160
NETBTMGY	DATACOMMS	1	160
NETBTMWH	DATACOMMS	1	160
NETBTSBK	DATACOMMS	1	160
NETBTSGY	DATACOMMS	1	160
NETBTSWH	DATACOMMS	1	160
NETC510M	DATACOMMS	1	166
NETC524	DATACOMMS	1	166
NETC61M	DATACOMMS	1	166
NETC624	DATACOMMS	1	166
NETC63M	DATACOMMS	1	166
NETC65M	DATACOMMS	1	166
NETC6ABK	DATACOMMS	1	160
NETC6AGY	DATACOMMS	1	160
NETC6AWH	DATACOMMS	1	160
NETCAT5BK	DATACOMMS	1	160
NETCAT5GY	DATACOMMS	1	160
NETCAT5WH	DATACOMMS	1	160
NETCAT6BK	DATACOMMS	1	160
NETCAT6GY	DATACOMMS	1	160
NETCAT6WH	DATACOMMS	1	160
NETDISATBK	DATACOMMS	1	161
NETDISATGY	DATACOMMS	1	161
NETDISATWH	DATACOMMS	1	161
NETDITVBK	DATACOMMS	1	161
NETDITVGY	DATACOMMS	1	161
NETDITVWH	DATACOMMS	1	161
NETHDMIBK	DATACOMMS	1	162
NETHDMIGY	DATACOMMS	1	162
NETHDMIWH	DATACOMMS	1	162
NETHGY	DATACOMMS	1	162
NETHWH	DATACOMMS	1	162
NETJ6	DATACOMMS	1	166
NETPIRBK	DATACOMMS	1	164
NETPIRGY	DATACOMMS	1	164
NETPIRSBK	DATACOMMS	1	164
NETPIRSGY	DATACOMMS	1	164
NETPIRSWH	DATACOMMS	1	164
NETPIRWH	DATACOMMS	1	164
NETQBK	DATACOMMS	1	160
NETQDBK	DATACOMMS	1	162

Code	Catalogue Section	Qty	Page
N			
NETQDGY	DATACOMMS	1	162
NETQDWH	DATACOMMS	1	162
NETQGY	DATACOMMS	1	160
NETQWH	DATACOMMS	1	160
NETRJ11BK	DATACOMMS	1	160
NETRJ11GY	DATACOMMS	1	160
NETRJ11WH	DATACOMMS	1	160
NETRJC5	DATACOMMS	1	166
NETRJC6	DATACOMMS	1	166
NETRLBK	DATACOMMS	1	165
NETRLGY	DATACOMMS	1	165
NETRLWH	DATACOMMS	1	165
NETSATBK	DATACOMMS	1	161
NETSATGY	DATACOMMS	1	161
NETSATSBK	DATACOMMS	1	161
NETSATSGY	DATACOMMS	1	161
NETSATSWH	DATACOMMS	1	161
NETSATWH	DATACOMMS	1	161
NETTRIBK	DATACOMMS	1	161
NETTRIGY	DATACOMMS	1	161
NETTRIWH	DATACOMMS	1	161
NETTS1BK	DATACOMMS	1	164
NETTS1GY	DATACOMMS	1	164
NETTS1WH	DATACOMMS	1	164
NETTVBK	DATACOMMS	1	161
NETTVGY	DATACOMMS	1	161
NETTVSBK	DATACOMMS	1	161
NETTVSGY	DATACOMMS	1	161
NETTVSWH	DATACOMMS	1	161
NETTVWH	DATACOMMS	1	161
NETUSBCBK	DATACOMMS	1	162
NETUSBCGY	DATACOMMS	1	162
NETUSBCWH	DATACOMMS	1	162
NETUSBPDBK	DATACOMMS	1	162
NETUSBPDGY	DATACOMMS	1	162
NETUSBPDWH	DATACOMMS	1	162
NH019W	OUTDOOR WALL LIGHTS	1	322
NH020W	OUTDOOR WALL LIGHTS	1	322
NSPGU1BC	CEILING & WALL LIGHTS	1	268
NSPGU1W	CEILING & WALL LIGHTS	1	268
NSPGU2BC	CEILING & WALL LIGHTS	1	268
NSPGU3BC	CEILING & WALL LIGHTS	1	269
NSPGU4BC	CEILING & WALL LIGHTS	1	269

Code	Catalogue Section	Qty	Page
O			
OAA1TRW	DOWNLIGHTS	1	232
ODA1FRB	DOWNLIGHTS	1	228
ODA1FRW	DOWNLIGHTS	1	228
ODA1FSB	DOWNLIGHTS	1	228
ODA1FSW	DOWNLIGHTS	1	228
ODA1TRB	DOWNLIGHTS	1	228
ODA1TRW	DOWNLIGHTS	1	228
ODA1TSB	DOWNLIGHTS	1	228
ODA1TSW	DOWNLIGHTS	1	228
OP2	WEATHERPROOF	1	185
OP21	WEATHERPROOF	1	185
OP21T	WEATHERPROOF	1	185
OP2DP	WEATHERPROOF	1	185
OP3	WEATHERPROOF	1	185
OP63N	WEATHERPROOF	1	186
OP663GBK	WEATHERPROOF	1	186
OP665GBK	WEATHERPROOF	1	186
OP6N	WEATHERPROOF	1	186
OP7E	WEATHERPROOF	1	187
OP7N	WEATHERPROOF	1	182
OP94	WEATHERPROOF	1	184
OP9E	WEATHERPROOF	1	187
OP9KW	WEATHERPROOF	1	183,457
OP9N	WEATHERPROOF	1	182
OP9R	WEATHERPROOF	1	183
OP9RCD	WEATHERPROOF	1	184
OPREMOTE	WEATHERPROOF	1	186
ORA1TRB	DOWNLIGHTS	1	232
ORA1TRW	DOWNLIGHTS	1	232
ORA1TSB	DOWNLIGHTS	1	232
ORA1TSW	DOWNLIGHTS	1	232
OS001	SENSORS	1	217
OS0014	SENSORS	1	217
OS0014B	SENSORS	1	217
OS0016	SENSORS	1	214
OS0019	SENSORS	1	214
OS001B	SENSORS	1	217
OS0025B	SENSORS	1	214
OS0025W	SENSORS	1	214
OS0026B	SENSORS	1	215
OS0026W	SENSORS	1	215
OS004	SENSORS	1	217
OS004B	SENSORS	1	217
OS006	SENSORS	1	186,218

Code	Catalogue Section	Qty	Page
O			
OS006B	SENSORS	1	186,218
OS008	SENSORS	1	216
OS021	SENSORS	1	219,419
OS021PIR	SENSORS	1	219,419
OS022	SENSORS	1	218
OSHFREC	SENSORS	1	216
OSPCKIT	SENSORS	1	218
OSPCR	SENSORS	1	218
OSPIRRE	SENSORS	1	219,419
Code	Catalogue Section	Qty	Page
P			
PM12W	MOULDED - CURVED EDGE	1	36
PM1DPW	MOULDED - CURVED EDGE	1	36
PM1G	MOULDED - CURVED EDGE	1	37
PM2000	MOULDED - CURVED EDGE	1	36
PM2G	MOULDED - CURVED EDGE	1	37
PM2W	MOULDED - CURVED EDGE	1	36
PM3000	MOULDED - CURVED EDGE	1	36
PM3W	MOULDED - CURVED EDGE	1	36
PM4000	MOULDED - CURVED EDGE	1	36
PM4G	MOULDED - CURVED EDGE	1	37
PM4W	MOULDED - CURVED EDGE	1	36
PM6300	MOULDED - CURVED EDGE	1	36
PM6300N	MOULDED - CURVED EDGE	1	36
PM6300NF	MOULDED - CURVED EDGE	1	36
PM6RCD	MOULDED - CURVED EDGE	1	35
PM7000	MOULDED - CURVED EDGE	1	35
PM7000N	MOULDED - CURVED EDGE	1	35
PM8300	MOULDED - CURVED EDGE	1	37,195
PM8310N	MOULDED - CURVED EDGE	1	37,195
PM8331N	MOULDED - CURVED EDGE	1	37
PM8333N	MOULDED - CURVED EDGE	1	37
PM8341N	MOULDED - CURVED EDGE	1	37
PM9001	MOULDED - CURVED EDGE	1	35
PM9001N	MOULDED - CURVED EDGE	1	35
PM9002	MOULDED - CURVED EDGE	1	35
PM9RCD	MOULDED - CURVED EDGE	1	35
PMCORDR	MOULDED - CURVED EDGE	1	37,195
PMG1	MOULDED - CURVED EDGE	1	30,35
PMG2	MOULDED - CURVED EDGE	1	30
PMG3	MOULDED - CURVED EDGE	1	30
PMG4	MOULDED - CURVED EDGE	1	30
PMG6	MOULDED - CURVED EDGE	1	30
PMG8	MOULDED - CURVED EDGE	1	30

Code	Catalogue Section	Qty	Page
P			
POTHB1	HIGH BAY / LOW BAY	1	424
POTHB1BRAC	HIGH BAY / LOW BAY	1	424
POTHB1L60	HIGH BAY / LOW BAY	1	424
POTHB2	HIGH BAY / LOW BAY	1	424
POTHB2BRAC	HIGH BAY / LOW BAY	1	424
POTHB2L60	HIGH BAY / LOW BAY	1	424
POTHBDALI	HIGH BAY / LOW BAY	1	424
POTHBMS	HIGH BAY / LOW BAY	1	424
POTHBRC	HIGH BAY / LOW BAY	1	424
PRECW4	RECESSED, SURFACE, & SUSPENSION LIGHTING	1	402
PRECW5	RECESSED, SURFACE, & SUSPENSION LIGHTING	1	402
PWL1	CEILING & WALL LIGHTS	1	272-273
PWL2	CEILING & WALL LIGHTS	1	273
PWL3	CEILING & WALL LIGHTS	1	272
PWL4	CEILING & WALL LIGHTS	1	272
PWL5	CEILING & WALL LIGHTS	1	272
PWL6	CEILING & WALL LIGHTS	1	273
PWL7	CEILING & WALL LIGHTS	1	272
PWL8	CEILING & WALL LIGHTS	1	272
PWRCC	CEILING & WALL LIGHTS	1	273
PWRCR	CEILING & WALL LIGHTS	1	273
Code	Catalogue Section	Qty	Page
R			
RD1B	DOWNLIGHTS	1	224
RD1C	DOWNLIGHTS	1	224
RD1CBR	DOWNLIGHTS	1	224
RD1W	DOWNLIGHTS	1	224
RD2B	DOWNLIGHTS	1	224
RD2C	DOWNLIGHTS	1	224
RD2CBR	DOWNLIGHTS	1	224
RD2W	DOWNLIGHTS	1	224
RDSHC	DOWNLIGHTS	1	224
RDSHCBR	DOWNLIGHTS	1	224
RDSHW	DOWNLIGHTS	1	224
RE6BZAB	DOWNLIGHTS	1	244
RE6BZB	DOWNLIGHTS	1	244
RE6BZBC	DOWNLIGHTS	1	244
RE6BZMB	DOWNLIGHTS	1	244
RE6BZPC	DOWNLIGHTS	1	244
RE6BZW	DOWNLIGHTS	1	244
RE6CTF	DOWNLIGHTS	1	244
RE6CTT	DOWNLIGHTS	1	245
RWL2A	OUTDOOR WALL LIGHTS	1	322
RWL5A	OUTDOOR WALL LIGHTS	1	322

Code	Catalogue Section	Qty	Page
S			
SA1525C	COMMERCIAL DOWNLIGHTS	1	393
SA1525CAD	COMMERCIAL DOWNLIGHTS	1	393
SA1525CDALI	COMMERCIAL DOWNLIGHTS	1	393
SA3040C	COMMERCIAL DOWNLIGHTS	1	393
SA3040CAD	COMMERCIAL DOWNLIGHTS	1	393
SA3040CDALI	COMMERCIAL DOWNLIGHTS	1	393
SA3040RW	COMMERCIAL DOWNLIGHTS	1	393
SA3040RWAD	COMMERCIAL DOWNLIGHTS	1	393
SA3040RWDALI	COMMERCIAL DOWNLIGHTS	1	393
SC15PA	WIRING BASICS	10	451
SC30PA	WIRING BASICS	10	451
SC3PA	WIRING BASICS	10	451
SER1525	COMMERCIAL DOWNLIGHTS	1	391
SER1525AD	COMMERCIAL DOWNLIGHTS	1	391
SER1525DALI	COMMERCIAL DOWNLIGHTS	1	391
SER3040	COMMERCIAL DOWNLIGHTS	1	391
SER3040AD	COMMERCIAL DOWNLIGHTS	1	391
SER3040DALI	COMMERCIAL DOWNLIGHTS	1	391
SER712	COMMERCIAL DOWNLIGHTS	1	391
SER712AD	COMMERCIAL DOWNLIGHTS	1	391
SF0100AB	SCREWLESS	1	123
SF0100AT	SCREWLESS	1	123
SF0100BC	SCREWLESS	1	123
SF0100BN	SCREWLESS	1	123
SF0100MB	SCREWLESS	1	123
SF0100MW	SCREWLESS	1	123
SF0100PB	SCREWLESS	1	123
SF0100PC	SCREWLESS	1	123
SF0100SB	SCREWLESS	1	123
SF0140BC	SCREWLESS	1	123
SF0140BN	SCREWLESS	1	123
SF0140MB	SCREWLESS	1	123
SF0140PC	SCREWLESS	1	123
SF0150AT	SCREWLESS	1	123
SF0150BC	SCREWLESS	1	123
SF0150BN	SCREWLESS	1	123
SF0150MW	SCREWLESS	1	123
SF0150PB	SCREWLESS	1	123
SF0150PC	SCREWLESS	1	123
SF0150SB	SCREWLESS	1	123
SF1000DPAB	SCREWLESS	1	107
SF1000DPAT	SCREWLESS	1	107
SF1000DPBC	SCREWLESS	1	107
SF1000DPMBB	SCREWLESS	1	107
SF1000DPMW	SCREWLESS	1	107
SF1000DPSB	SCREWLESS	1	107
SF1100AB	SCREWLESS	1	108
SF1100AT	SCREWLESS	1	108
SF1100BC	SCREWLESS	1	108
SF1100BN	SCREWLESS	1	108
SF1100MBB	SCREWLESS	1	108
SF1100MW	SCREWLESS	1	108
SF1100PB	SCREWLESS	1	108
SF1100PC	SCREWLESS	1	108
SF1100SB	SCREWLESS	1	108
SF1200AB	SCREWLESS	1	107
SF1200AT	SCREWLESS	1	107
SF1200BC	SCREWLESS	1	107
SF1200BN	SCREWLESS	1	107
SF1200MBB	SCREWLESS	1	107
SF1200MW	SCREWLESS	1	107
SF1200PB	SCREWLESS	1	107
SF1200PC	SCREWLESS	1	107
SF1200SB	SCREWLESS	1	107
SF12TOGAB	SCREWLESS	1	111
SF1DIMAB	SCREWLESS	1	114
SF1DIMAT	SCREWLESS	1	114
SF1DIMBC	SCREWLESS	1	114
SF1DIMBN	SCREWLESS	1	114
SF1DIMMBB	SCREWLESS	1	114
SF1DIMMW	SCREWLESS	1	114
SF1DIMPB	SCREWLESS	1	114
SF1DIMPC	SCREWLESS	1	114
SF1DIMSB	SCREWLESS	1	114
SF1GAT	SCREWLESS	1	126
SF1GBC	SCREWLESS	1	126
SF1GBN	SCREWLESS	1	126
SF1GMB	SCREWLESS	1	126
SF1GMW	SCREWLESS	1	126
SF1GPB	SCREWLESS	1	126
SF1GPC	SCREWLESS	1	126
SF1GSB	SCREWLESS	1	126
SF1TOGAB	SCREWLESS	1	111
SF1TOGBC	SCREWLESS	1	111
SF1TOGPB	SCREWLESS	1	111
SF2000AB	SCREWLESS	1	107
SF2000AT	SCREWLESS	1	107
SF2000BC	SCREWLESS	1	107

Code	Catalogue Section	Qty	Page
S			
SF2000BN	SCREWLESS	1	107
SF2000MBB	SCREWLESS	1	107
SF2000MW	SCREWLESS	1	107
SF2000PB	SCREWLESS	1	107
SF2000PC	SCREWLESS	1	107
SF2000SB	SCREWLESS	1	107
SF2191AB	SCREWLESS	1	112
SF2191AT	SCREWLESS	1	112
SF2191BC	SCREWLESS	1	112
SF2191BN	SCREWLESS	1	112
SF2191MBB	SCREWLESS	1	112
SF2191MW	SCREWLESS	1	112
SF2191PB	SCREWLESS	1	112
SF2191PC	SCREWLESS	1	112
SF2191SB	SCREWLESS	1	112
SF2192AB	SCREWLESS	1	112
SF2192AT	SCREWLESS	1	112
SF2192BC	SCREWLESS	1	112
SF2192BN	SCREWLESS	1	112
SF2192MBB	SCREWLESS	1	112
SF2192MW	SCREWLESS	1	112
SF2192PB	SCREWLESS	1	112
SF2192PC	SCREWLESS	1	112
SF2192SB	SCREWLESS	1	112
SF2193AB	SCREWLESS	1	113
SF2193AT	SCREWLESS	1	113
SF2193BC	SCREWLESS	1	113
SF2193BN	SCREWLESS	1	113
SF2193MBB	SCREWLESS	1	113
SF2193MW	SCREWLESS	1	113
SF2193PB	SCREWLESS	1	113
SF2193PC	SCREWLESS	1	113
SF2193SB	SCREWLESS	1	113
SF2194AB	SCREWLESS	1	113
SF2194AT	SCREWLESS	1	113
SF2194BC	SCREWLESS	1	113
SF2194BN	SCREWLESS	1	113
SF2194MBB	SCREWLESS	1	113
SF2194MW	SCREWLESS	1	113
SF2194PB	SCREWLESS	1	113
SF2194PC	SCREWLESS	1	113
SF2194SB	SCREWLESS	1	113
SF2GAB	SCREWLESS	1	126
SF2GAT	SCREWLESS	1	126

Code	Catalogue Section	Qty	Page
S			
SF2GBC	SCREWLESS	1	126
SF2GBN	SCREWLESS	1	126
SF2GMB	SCREWLESS	1	126
SF2GMW	SCREWLESS	1	126
SF2GPB	SCREWLESS	1	126
SF2GPC	SCREWLESS	1	126
SF2GSB	SCREWLESS	1	126
SF2TOGAB	SCREWLESS	1	111
SF2TOGBC	SCREWLESS	1	111
SF2TOGPB	SCREWLESS	1	111
SF3000AB	SCREWLESS	1	109
SF3000AT	SCREWLESS	1	109
SF3000BC	SCREWLESS	1	109
SF3000BN	SCREWLESS	1	109
SF3000MBB	SCREWLESS	1	109
SF3000MW	SCREWLESS	1	109
SF3000PB	SCREWLESS	1	109
SF3000PC	SCREWLESS	1	109
SF3000SB	SCREWLESS	1	109
SF3TOGAB	SCREWLESS	1	111
SF4000AB	SCREWLESS	1	109
SF4000AT	SCREWLESS	1	109
SF4000BC	SCREWLESS	1	109
SF4000BN	SCREWLESS	1	109
SF4000MBB	SCREWLESS	1	109
SF4000MW	SCREWLESS	1	109
SF4000PB	SCREWLESS	1	109
SF4000PC	SCREWLESS	1	109
SF4000SB	SCREWLESS	1	109
SF4100AB	SCREWLESS	1	110
SF4100AT	SCREWLESS	1	110
SF4100BC	SCREWLESS	1	110
SF4100BN	SCREWLESS	1	110
SF4100MBB	SCREWLESS	1	110
SF4100MW	SCREWLESS	1	110
SF4100PB	SCREWLESS	1	110
SF4100PC	SCREWLESS	1	110
SF4100SB	SCREWLESS	1	110
SF4200AB	SCREWLESS	1	110
SF4200BC	SCREWLESS	1	110
SF4200BN	SCREWLESS	1	110
SF4200MBB	SCREWLESS	1	110
SF4200MW	SCREWLESS	1	110
SF4200PB	SCREWLESS	1	110

Code	Catalogue Section	Qty	Page
S			
SF4200PC	SCREWLESS	1	110
SF4200SB	SCREWLESS	1	110
SF4GAB	SCREWLESS	1	127
SF4GAT	SCREWLESS	1	127
SF4GBC	SCREWLESS	1	127
SF4GBN	SCREWLESS	1	127
SF4GMB	SCREWLESS	1	127
SF4GMW	SCREWLESS	1	127
SF4GPB	SCREWLESS	1	127
SF4GPC	SCREWLESS	1	127
SF4GSB	SCREWLESS	1	127
SF4T0GAB	SCREWLESS	1	111
SF5AAB	SCREWLESS	1	105
SF5AAT	SCREWLESS	1	105
SF5ABC	SCREWLESS	1	105
SF5ABCG	SCREWLESS	1	105
SF5ABCW	SCREWLESS	1	105
SF5ABN	SCREWLESS	1	105
SF5AMB	SCREWLESS	1	105
SF5AMW	SCREWLESS	1	105
SF5ASB	SCREWLESS	1	105
SF6000AB	SCREWLESS	1	115
SF6000AT	SCREWLESS	1	115
SF6000BC	SCREWLESS	1	115
SF6000BN	SCREWLESS	1	115
SF6000MBB	SCREWLESS	1	115
SF6000MW	SCREWLESS	1	115
SF6000PB	SCREWLESS	1	115
SF6000PC	SCREWLESS	1	115
SF6000SB	SCREWLESS	1	115
SF6300AB	SCREWLESS	1	115
SF6300AT	SCREWLESS	1	115
SF6300BC	SCREWLESS	1	115
SF6300BN	SCREWLESS	1	115
SF6300FAB	SCREWLESS	1	116
SF6300FAT	SCREWLESS	1	116
SF6300FBC	SCREWLESS	1	116
SF6300FBN	SCREWLESS	1	116
SF6300FMBB	SCREWLESS	1	116
SF6300FMW	SCREWLESS	1	116
SF6300FPC	SCREWLESS	1	116
SF6300FSB	SCREWLESS	1	116
SF6300MBB	SCREWLESS	1	115
SF6300MW	SCREWLESS	1	115

Code	Catalogue Section	Qty	Page
S			
SF6300NAB	SCREWLESS	1	116
SF6300NAT	SCREWLESS	1	116
SF6300NBC	SCREWLESS	1	116
SF6300NBN	SCREWLESS	1	116
SF6300NMBB	SCREWLESS	1	116
SF6300NMW	SCREWLESS	1	116
SF6300NPB	SCREWLESS	1	116
SF6300NPC	SCREWLESS	1	116
SF6300NSB	SCREWLESS	1	116
SF6300PB	SCREWLESS	1	115
SF6300PC	SCREWLESS	1	115
SF6300SB	SCREWLESS	1	115
SF63WAB	SCREWLESS	1	103
SF63WAT	SCREWLESS	1	103
SF63WBCG	SCREWLESS	1	103
SF63WMB	SCREWLESS	1	103
SF63WMW	SCREWLESS	1	103
SF6GAT	SCREWLESS	1	127
SF6GBC	SCREWLESS	1	127
SF6GBN	SCREWLESS	1	127
SF6GMB	SCREWLESS	1	127
SF6GMW	SCREWLESS	1	127
SF6GPB	SCREWLESS	1	127
SF6GPC	SCREWLESS	1	127
SF6GSB	SCREWLESS	1	127
SF7300BC	SCREWLESS	1	124
SF7300BN	SCREWLESS	1	124
SF7300MB	SCREWLESS	1	124
SF7300PC	SCREWLESS	1	124
SF7400MB	SCREWLESS	1	124
SF7400PC	SCREWLESS	1	124
SF81MNAB	SCREWLESS	1	122
SF81MNAT	SCREWLESS	1	122
SF81MNBC	SCREWLESS	1	122
SF81MNBN	SCREWLESS	1	122
SF81MNMBB	SCREWLESS	1	122
SF81MNMW	SCREWLESS	1	122
SF81MNPB	SCREWLESS	1	122
SF81MNPC	SCREWLESS	1	122
SF81MNSB	SCREWLESS	1	122
SF82MNAB	SCREWLESS	1	122
SF82MNAT	SCREWLESS	1	122
SF82MNBC	SCREWLESS	1	122
SF82MNBN	SCREWLESS	1	122

Code	Catalogue Section	Qty	Page
S			
SF82MNMBB	SCREWLESS	1	122
SF82MNMW	SCREWLESS	1	122
SF82MNPB	SCREWLESS	1	122
SF82MNPC	SCREWLESS	1	122
SF82MNSB	SCREWLESS	1	122
SF8341AB	SCREWLESS	1	120
SF8341AT	SCREWLESS	1	120
SF8341BC	SCREWLESS	1	120
SF8341BN	SCREWLESS	1	120
SF8341MBB	SCREWLESS	1	120
SF8341MW	SCREWLESS	1	120
SF8341NAB	SCREWLESS	1	120
SF8341NAT	SCREWLESS	1	120
SF8341NBC	SCREWLESS	1	120
SF8341NBN	SCREWLESS	1	120
SF8341NMBB	SCREWLESS	1	120
SF8341NMW	SCREWLESS	1	120
SF8341NPB	SCREWLESS	1	120
SF8341NPC	SCREWLESS	1	120
SF8341NSB	SCREWLESS	1	120
SF8341PB	SCREWLESS	1	120
SF8341PC	SCREWLESS	1	120
SF8341SB	SCREWLESS	1	120
SF8342AB	SCREWLESS	1	120
SF8342AT	SCREWLESS	1	120
SF8342BC	SCREWLESS	1	120
SF8342MB	SCREWLESS	1	120
SF8342MW	SCREWLESS	1	120
SF8342SB	SCREWLESS	1	120
SF8350AB	SCREWLESS	1	125
SF8350AT	SCREWLESS	1	125
SF8350BC	SCREWLESS	1	125
SF8350BN	SCREWLESS	1	125
SF8350MB	SCREWLESS	1	125
SF8350MW	SCREWLESS	1	125
SF8350PB	SCREWLESS	1	125
SF8350PC	SCREWLESS	1	125
SF8350SB	SCREWLESS	1	125
SF8360AB	SCREWLESS	1	125
SF8360AT	SCREWLESS	1	125
SF8360BC	SCREWLESS	1	125
SF8360BN	SCREWLESS	1	125
SF8360MB	SCREWLESS	1	125
SF8360MW	SCREWLESS	1	125

Code	Catalogue Section	Qty	Page
S			
SF8360PB	SCREWLESS	1	125
SF8360PC	SCREWLESS	1	125
SF8360SB	SCREWLESS	1	125
SF8900AB	SCREWLESS	1	118
SF8900AT	SCREWLESS	1	118
SF8900BC	SCREWLESS	1	118
SF8900BCG	SCREWLESS	1	118
SF8900BCW	SCREWLESS	1	118
SF8900BN	SCREWLESS	1	118
SF8900MB	SCREWLESS	1	118
SF8900MW	SCREWLESS	1	118
SF8900PB	SCREWLESS	1	118
SF8900PBW	SCREWLESS	1	118
SF8900PC	SCREWLESS	1	118
SF8900PCG	SCREWLESS	1	118
SF8900PCW	SCREWLESS	1	118
SF8900SB	SCREWLESS	1	118
SF8909AB	SCREWLESS	1	117
SF8909AT	SCREWLESS	1	117
SF8909BC	SCREWLESS	1	117
SF8909BCG	SCREWLESS	1	117
SF8909BCW	SCREWLESS	1	117
SF8909BN	SCREWLESS	1	117
SF8909MB	SCREWLESS	1	117
SF8909MW	SCREWLESS	1	117
SF8909PC	SCREWLESS	1	117
SF8909PCG	SCREWLESS	1	117
SF8909PCW	SCREWLESS	1	117
SF8909SB	SCREWLESS	1	117
SFC6AB	SCREWLESS	1	124
SFC6AT	SCREWLESS	1	124
SFC6BC	SCREWLESS	1	124
SFC6BN	SCREWLESS	1	124
SFC6MB	SCREWLESS	1	124
SFC6MW	SCREWLESS	1	124
SFC6SB	SCREWLESS	1	124
SFCARDAB	SCREWLESS	1	119
SFCARDAT	SCREWLESS	1	119
SFCARDBC	SCREWLESS	1	119
SFCARDBN	SCREWLESS	1	119
SFCARDMB	SCREWLESS	1	119
SFCARDMW	SCREWLESS	1	119
SFCARDPC	SCREWLESS	1	119
SFCARDSB	SCREWLESS	1	119

Code	Catalogue Section	Qty	Page
S			
SFPLAB	SCREWLESS	1	271
SFPLBB	SCREWLESS	1	271
SFPLBC	CEILING & WALL LIGHTS	1	271
SFPLMB	CEILING & WALL LIGHTS	1	271
SFPLMW	CEILING & WALL LIGHTS	1	271
SFPLPB	CEILING & WALL LIGHTS	1	271
SFR192LAB	SCREWLESS	1	134
SFR192LAT	SCREWLESS	1	134
SFR192LBC	SCREWLESS	1	134
SFR192LBCG	SCREWLESS	1	134
SFR192LBCW	SCREWLESS	1	134
SFR192LMBB	SCREWLESS	1	134
SFR192LMW	SCREWLESS	1	134
SFR192LSB	SCREWLESS	1	134
SFR192RAB	SCREWLESS	1	132
SFR192RAT	SCREWLESS	1	132
SFR192RBC	SCREWLESS	1	132
SFR192RBCG	SCREWLESS	1	132
SFR192RBCW	SCREWLESS	1	132
SFR192RMBB	SCREWLESS	1	132
SFR192RMW	SCREWLESS	1	132
SFR192RSB	SCREWLESS	1	132
SFR194AB	SCREWLESS	1	130
SFR194AT	SCREWLESS	1	130
SFR194BC	SCREWLESS	1	130
SFR194BCG	SCREWLESS	1	130
SFR194BCW	SCREWLESS	1	130
SFR194MBB	SCREWLESS	1	130
SFR194MW	SCREWLESS	1	130
SFR194SB	SCREWLESS	1	130
SFR298AB	SCREWLESS	1	128
SFR298AT	SCREWLESS	1	128
SFR298BC	SCREWLESS	1	128
SFR298BCG	SCREWLESS	1	128
SFR298BCW	SCREWLESS	1	128
SFR298MBB	SCREWLESS	1	128
SFR298MW	SCREWLESS	1	128
SFR298SB	SCREWLESS	1	128
SFR7000AB	SCREWLESS	1	105
SFR7000AT	SCREWLESS	1	105
SFR7000BC	SCREWLESS	1	105
SFR7000BCG	SCREWLESS	1	105
SFR7000BCW	SCREWLESS	1	105
SFR7000BN	SCREWLESS	1	105

Code	Catalogue Section	Qty	Page
S			
SFR7000MBB	SCREWLESS	1	105
SFR7000MW	SCREWLESS	1	105
SFR7000PB	SCREWLESS	1	105
SFR7000PBW	SCREWLESS	1	105
SFR7000PC	SCREWLESS	1	105
SFR7000PCG	SCREWLESS	1	105
SFR7000PCW	SCREWLESS	1	105
SFR7000SB	SCREWLESS	1	105
SFR7000UAB	SCREWLESS	1	104
SFR7000UAT	SCREWLESS	1	104
SFR7000UBC	SCREWLESS	1	104
SFR7000UBCG	SCREWLESS	1	104
SFR7000UBCW	SCREWLESS	1	104
SFR7000UMB	SCREWLESS	1	104
SFR7000UMW	SCREWLESS	1	104
SFR7000USB	SCREWLESS	1	104
SFR83MNAB	SCREWLESS	1	121
SFR83MNAT	SCREWLESS	1	121
SFR83MNBC	SCREWLESS	1	121
SFR83MNBCG	SCREWLESS	1	121
SFR83MNBCW	SCREWLESS	1	121
SFR83MNBN	SCREWLESS	1	121
SFR83MNMBB	SCREWLESS	1	121
SFR83MNMW	SCREWLESS	1	121
SFR83MNPB	SCREWLESS	1	121
SFR83MNPBW	SCREWLESS	1	121
SFR83MNPC	SCREWLESS	1	121
SFR83MNPCG	SCREWLESS	1	121
SFR83MNPCW	SCREWLESS	1	121
SFR83MNSB	SCREWLESS	1	121
SFR9000AB	SCREWLESS	1	100
SFR9000AT	SCREWLESS	1	100
SFR9000BC	SCREWLESS	1	100
SFR9000BCG	SCREWLESS	1	100
SFR9000BCW	SCREWLESS	1	100
SFR9000BN	SCREWLESS	1	100
SFR9000MBB	SCREWLESS	1	100
SFR9000MW	SCREWLESS	1	100
SFR9000PB	SCREWLESS	1	100
SFR9000PBW	SCREWLESS	1	100
SFR9000PC	SCREWLESS	1	100
SFR9000PCG	SCREWLESS	1	100
SFR9000PCW	SCREWLESS	1	100
SFR9000SB	SCREWLESS	1	100

Code	Catalogue Section	Qty	Page
S			
SFR9001AB	SCREWLESS	1	102
SFR9001BC	SCREWLESS	1	102
SFR9001BCW	SCREWLESS	1	102
SFR9001MBB	SCREWLESS	1	102
SFR9001MW	SCREWLESS	1	102
SFR9919AB	SCREWLESS	1	103
SFR9919AT	SCREWLESS	1	103
SFR9919BC	SCREWLESS	1	103
SFR9919BCG	SCREWLESS	1	103
SFR9919BCW	SCREWLESS	1	103
SFR9919MBB	SCREWLESS	1	103
SFR9919MW	SCREWLESS	1	103
SFR9919SB	SCREWLESS	1	103
SFR992LAT	SCREWLESS	1	135
SFR992LBC	SCREWLESS	1	135
SFR992LBCG	SCREWLESS	1	135
SFR992LMBB	SCREWLESS	1	135
SFR992LMW	SCREWLESS	1	135
SFR992LSB	SCREWLESS	1	135
SFR992RAT	SCREWLESS	1	133
SFR992RBC	SCREWLESS	1	133
SFR992RBCG	SCREWLESS	1	133
SFR992RMBB	SCREWLESS	1	133
SFR992RMW	SCREWLESS	1	133
SFR992RSB	SCREWLESS	1	133
SFR9940AB	SCREWLESS	1	101
SFR9940AT	SCREWLESS	1	101
SFR9940BC	SCREWLESS	1	101
SFR9940BCG	SCREWLESS	1	101
SFR9940BCW	SCREWLESS	1	101
SFR9940BN	SCREWLESS	1	101
SFR9940MBB	SCREWLESS	1	101
SFR9940MW	SCREWLESS	1	101
SFR9940PB	SCREWLESS	1	101
SFR9940PBW	SCREWLESS	1	101
SFR9940PC	SCREWLESS	1	101
SFR9940PCG	SCREWLESS	1	101
SFR9940PCW	SCREWLESS	1	101
SFR9940SB	SCREWLESS	1	101
SFR9941AB	SCREWLESS	1	102
SFR9941BC	SCREWLESS	1	102
SFR9941BCW	SCREWLESS	1	102
SFR9941MBB	SCREWLESS	1	102
SFR9941MW	SCREWLESS	1	102

Code	Catalogue Section	Qty	Page
S			
SFR9945AB	SCREWLESS	1	99
SFR9945AT	SCREWLESS	1	99
SFR9945BC	SCREWLESS	1	99
SFR9945BCG	SCREWLESS	1	99
SFR9945BCW	SCREWLESS	1	99
SFR9945MBB	SCREWLESS	1	99
SFR9945MW	SCREWLESS	1	99
SFR9945SB	SCREWLESS	1	99
SFR994AT	SCREWLESS	1	131
SFR994BC	SCREWLESS	1	131
SFR994BCG	SCREWLESS	1	131
SFR994BCW	SCREWLESS	1	131
SFR994MBB	SCREWLESS	1	131
SFR994MW	SCREWLESS	1	131
SFR994SB	SCREWLESS	1	131
SFR9965AB	SCREWLESS	1	98
SFR9965AT	SCREWLESS	1	98
SFR9965BC	SCREWLESS	1	98
SFR9965BCG	SCREWLESS	1	98
SFR9965BCW	SCREWLESS	1	98
SFR9965MBB	SCREWLESS	1	98
SFR9965MW	SCREWLESS	1	98
SFR9965SB	SCREWLESS	1	98
SFR998AT	SCREWLESS	1	129
SFR998BC	SCREWLESS	1	129
SFR998BCG	SCREWLESS	1	129
SFR998BCW	SCREWLESS	1	129
SFR998MBB	SCREWLESS	1	129
SFR998SB	SCREWLESS	1	129
SFR9LOCKAB	SCREWLESS	1	106
SFR9LOCKAT	SCREWLESS	1	106
SFR9LOCKBCW	SCREWLESS	1	106
SFR9LOCKMB	SCREWLESS	1	106
SFR9LOCKMW	SCREWLESS	1	106
SFR9LOCKSB	SCREWLESS	1	106
SFR9NLAB	SCREWLESS	1	104
SFR9NLAT	SCREWLESS	1	104
SFR9NLBCG	SCREWLESS	1	104
SFR9NLMBB	SCREWLESS	1	104
SFR9NLMW	SCREWLESS	1	104
SFRJ45AB	SCREWLESS	1	124
SFRJ45AT	SCREWLESS	1	124
SFRJ45BC	SCREWLESS	1	124
SFRJ45BN	SCREWLESS	1	124

Code	Catalogue Section	Qty	Page
S			
SFRJ45MB	SCREWLESS	1	124
SFRJ45MW	SCREWLESS	1	124
SFRJ45PB	SCREWLESS	1	124
SFRJ45SB	SCREWLESS	1	124
SFRLAT	SCREWLESS	1	119
SFRLBC	SCREWLESS	1	119
SFRLMB	SCREWLESS	1	119
SFRLMW	SCREWLESS	1	119
SFTS1AT	SCREWLESS	1	108
SFTS1BC	SCREWLESS	1	108
SFTS1BN	SCREWLESS	1	108
SFTS1MB	SCREWLESS	1	108
SFTS1MW	SCREWLESS	1	108
SFTS1PC	SCREWLESS	1	108
SFTS1SB	SCREWLESS	1	108
SHE1B	BULKHEADS & WALL PACKS	1	374
SHE1BEM	BULKHEADS & WALL PACKS	1	374
SHE1BEMP	BULKHEADS & WALL PACKS	1	374
SHE1BEMS	BULKHEADS & WALL PACKS	1	374
SHE1BP	BULKHEADS & WALL PACKS	1	374
SHE1BS	BULKHEADS & WALL PACKS	1	374
SHE1G	BULKHEADS & WALL PACKS	1	374
SHE1GEM	BULKHEADS & WALL PACKS	1	374
SHE1GEMP	BULKHEADS & WALL PACKS	1	374
SHE1GEMS	BULKHEADS & WALL PACKS	1	374
SHE1GP	BULKHEADS & WALL PACKS	1	374
SHE1GS	BULKHEADS & WALL PACKS	1	374
SHE2B	BULKHEADS & WALL PACKS	1	375
SHE2BEM	BULKHEADS & WALL PACKS	1	375
SHE2BEMP	BULKHEADS & WALL PACKS	1	375
SHE2BEMS	BULKHEADS & WALL PACKS	1	375
SHE2BP	BULKHEADS & WALL PACKS	1	375
SHE2BS	BULKHEADS & WALL PACKS	1	375
SHE2G	BULKHEADS & WALL PACKS	1	375
SHE2GEM	BULKHEADS & WALL PACKS	1	375
SHE2GEMP	BULKHEADS & WALL PACKS	1	375
SHE2GEMS	BULKHEADS & WALL PACKS	1	375
SHE2GP	BULKHEADS & WALL PACKS	1	375
SHE2GS	BULKHEADS & WALL PACKS	1	375
SK0011	SPECIALIST SOCKETS	1	139
SK0016	SPECIALIST SOCKETS	1	140
SK006	SPECIALIST SOCKETS	1	139
SK9909BC	SPECIALIST SOCKETS	1	138
SK9909BN	SPECIALIST SOCKETS	1	138
SK9909PC	SPECIALIST SOCKETS	1	138
SKR008	SPECIALIST SOCKETS	1	141
SKR2	SPECIALIST SOCKETS	1	141
SKR3	SPECIALIST SOCKETS	1	140
SKR8L	SPECIALIST SOCKETS	1	141,293
SKR9	SPECIALIST SOCKETS	1	141
SKR94L	SPECIALIST SOCKETS	1	141,293
SL20CCTB	FLOODLIGHTS	1	356
SL30CCTW	FLOODLIGHTS	1	356
SLIGHT2	BATHROOM	1	280
SN0100	MOULDED - SQUARE EDGE	10	14
SN0140	MOULDED - SQUARE EDGE	10	14
SN1000	MOULDED - SQUARE EDGE	10	12
SN1000DPK	MOULDED - SQUARE EDGE	1	12
SN1100	MOULDED - SQUARE EDGE	10	11
SN1200	MOULDED - SQUARE EDGE	10	12
SN127	MOULDED - SQUARE EDGE	10	12
SN127P	MOULDED - SQUARE EDGE	10	15
SN127R	MOULDED - SQUARE EDGE	1	12
SN1300	MOULDED - SQUARE EDGE	10	15
SN1381	WIRING BASICS	20	201
SN1382	WIRING BASICS	20	201
SN1383	WIRING BASICS	20	201
SN1383BK	WIRING BASICS	20	201
SN1383QB	WIRING BASICS	20	201
SN1383QW	WIRING BASICS	20	201
SN1383RB	WIRING BASICS	20	201
SN1383RW	WIRING BASICS	20	201
SN13AFUSE	WIRING BASICS	10	200
SN1400	MOULDED - SQUARE EDGE	10	15
SN1400P	MOULDED - SQUARE EDGE	10	15,192
SN1500	MOULDED - SQUARE EDGE	5	15
SN1500P	MOULDED - SQUARE EDGE	10	15,192
SN1510	MOULDED - SQUARE EDGE	5	15
SN1600	MOULDED - SQUARE EDGE	5	15
SN1610	MOULDED - SQUARE EDGE	10	15
SN1700	MOULDED - SQUARE EDGE	10	15
SN1800	MOULDED - SQUARE EDGE	5	15
SN1DIM	MOULDED - SQUARE EDGE	10	12
SN2000	MOULDED - SQUARE EDGE	10	12
SN2000K	MOULDED - SQUARE EDGE	1	12
SN2100	MOULDED - SQUARE EDGE	1	12
SN2161	MOULDED - SQUARE EDGE	5	13
SN2162	MOULDED - SQUARE EDGE	5	13

Code	Catalogue Section	Qty	Page
S			
SN2191	MOULDED - SQUARE EDGE	1	12
SN2192	MOULDED - SQUARE EDGE	1	12
SN2DIM	MOULDED - SQUARE EDGE	10	12
SN3000	MOULDED - SQUARE EDGE	10	12
SN3AFUSE	WIRING BASICS	10	200
SN3DIM	MOULDED - SQUARE EDGE	1	12
SN3P	LAMPS & LIGHTING ACCESSORIES	20	198,448
SN4000	MOULDED - SQUARE EDGE	10	12
SN400M	MOULDED - SQUARE EDGE	1	12,23,50,67,84,114
SN4100	MOULDED - SQUARE EDGE	5	12
SN4200	MOULDED - SQUARE EDGE	5	12
SN4DIM	MOULDED - SQUARE EDGE	1	12
SN4P	LAMPS & LIGHTING ACCESSORIES	20	198,448
SN5AFUSE	WIRING BASICS	10	200
SN5U	MOULDED - SQUARE EDGE	10	10
SN6000	MOULDED - SQUARE EDGE	10	13
SN6000-3A	MOULDED - SQUARE EDGE	10	13
SN6000N	MOULDED - SQUARE EDGE	10	13
SN6300	MOULDED - SQUARE EDGE	10	13
SN6300N	MOULDED - SQUARE EDGE	10	13
SN7000	MOULDED - SQUARE EDGE	10	10
SN7000S	MOULDED - SQUARE EDGE	10	10
SN7000U	MOULDED - SQUARE EDGE	10	10
SN7300	MOULDED - SQUARE EDGE	10	14
SN8200	WIRING BASICS	10	198
SN8210	WIRING BASICS	1	198
SN8220	WIRING BASICS	10	198
SN8230	WIRING BASICS	10	198
SN8250	WIRING BASICS	20	198
SN8260	WIRING BASICS	10	198
SN8260P3	WIRING BASICS	1	198
SN8260P4	WIRING BASICS	1	198
SN8270	WIRING BASICS	10	198
SN8280	WIRING BASICS	10	198
SN8290	WIRING BASICS	5	195
SN8300	WIRING BASICS	5	195
SN8310N	WIRING BASICS	1	195
SN8311N	WIRING BASICS	1	195
SN8331	MOULDED - SQUARE EDGE	10	13
SN8331N	MOULDED - SQUARE EDGE	10	13
SN8331NW	MOULDED - SQUARE EDGE	10	13
SN8331W	MOULDED - SQUARE EDGE	10	13
SN8332	MOULDED - SQUARE EDGE	5	14
SN8332N	MOULDED - SQUARE EDGE	5	14
SN8332NW	MOULDED - SQUARE EDGE	5	14
SN8332W	MOULDED - SQUARE EDGE	5	14
SN8333	MOULDED - SQUARE EDGE	5	14
SN8333N	MOULDED - SQUARE EDGE	5	14
SN8333NW	MOULDED - SQUARE EDGE	5	14
SN8333W	MOULDED - SQUARE EDGE	5	14
SN8335D	WIRING BASICS	5	192
SN8340	MOULDED - SQUARE EDGE	5	13
SN8341	MOULDED - SQUARE EDGE	10	13
SN8341N	MOULDED - SQUARE EDGE	10	13
SN8342	MOULDED - SQUARE EDGE	10	13
SN8345NF	MOULDED - SQUARE EDGE	1	13
SN8350	MOULDED - SQUARE EDGE	10	14
SN8360	MOULDED - SQUARE EDGE	10	14
SN8370	WIRING BASICS	10	192
SN8375	WIRING BASICS	10	192
SN8380	WIRING BASICS	10	192
SN8380D	WIRING BASICS	10	192
SN8381	WIRING BASICS	10	192
SN8382	WIRING BASICS	10	192
SN8400	WIRING BASICS	20	200
SN8400B	WIRING BASICS	20	200
SN8410	WIRING BASICS	20	200
SN8410B	WIRING BASICS	20	200
SN8420	WIRING BASICS	10	200
SN8420B	WIRING BASICS	10	200
SN8430	WIRING BASICS	10	200
SN8430B	WIRING BASICS	10	200
SN8460	WIRING BASICS	10	200
SN8460B	WIRING BASICS	10	200
SN8470	WIRING BASICS	5	200
SN8470B	WIRING BASICS	5	200
SN8900N	MOULDED - SQUARE EDGE	1	11
SN8909	MOULDED - SQUARE EDGE	1	11
SN9000	MOULDED - SQUARE EDGE	5	10
SN9000S	MOULDED - SQUARE EDGE	5	10
SN9000U	MOULDED - SQUARE EDGE	5	10
SN9001	MOULDED - SQUARE EDGE	1	10
SN9002	MOULDED - SQUARE EDGE	1	9
SN9003	MOULDED - SQUARE EDGE	1	9
SN9919D	MOULDED - SQUARE EDGE	1	10
SN9930	MOULDED - SQUARE EDGE	1	9
SN9931D	MOULDED - SQUARE EDGE	5	9
SN9KW	SMART HOME	1	10,456

Code	Catalogue Section	Qty	Page
S			
SNEB1	WIRING BASICS	10	200
SNEB2	WIRING BASICS	5	200
SNEBBK	WIRING BASICS	10	200
SNEBBL	WIRING BASICS	10	200
SNEBBR	WIRING BASICS	10	200
SNEBGR	WIRING BASICS	10	200
SNEBWH	WIRING BASICS	10	200
SNMIXEDFUSE	WIRING BASICS	10	200
SPIKE4BL	SPIKE LIGHTS	1	339
SPIKE4PC	SPIKE LIGHTS	1	339
SPIKEGUBK	SPIKE LIGHTS	1	336
SPIKEXT1	SPIKE LIGHTS	1	338
SPKEVEMKIT	DOWNLIGHTS	1	239
SPKEVF	DOWNLIGHTS	1	238
SPKEVFBZAB	DOWNLIGHTS	1	238
SPKEVFBZB	DOWNLIGHTS	1	238
SPKEVFBZBC	DOWNLIGHTS	1	238
SPKEVFBZMB	DOWNLIGHTS	1	238
SPKEVFBZPC	DOWNLIGHTS	1	238
SPKEVFBZW	DOWNLIGHTS	1	238
SPKEVFKRGBW	DOWNLIGHTS	1	241,458
SPKEVFPIR	DOWNLIGHTS	1	239
SPKEVFS10	DOWNLIGHTS	1	239
SPKEVTAB	DOWNLIGHTS	1	240
SPKEVTB	DOWNLIGHTS	1	240
SPKEVTBC	DOWNLIGHTS	1	240
SPKEVTMB	DOWNLIGHTS	1	240
SPKEVTPC	DOWNLIGHTS	1	240
SPKEVTW	DOWNLIGHTS	1	240
ST6ABK	WIRING BASICS	10	199
ST6AWH	WIRING BASICS	10	199
SUR5LED	RECESSED, SURFACE, & SUSPENSION LIGHTING	1	399
SUR5LEDBK	RECESSED, SURFACE, & SUSPENSION LIGHTING	1	399
SUR5LEDEM	RECESSED, SURFACE, & SUSPENSION LIGHTING	1	399
SUR5LEDEMBK	RECESSED, SURFACE, & SUSPENSION LIGHTING	1	399
SUR5LEDEMG	RECESSED, SURFACE, & SUSPENSION LIGHTING	1	399
SUR5LEDG	RECESSED, SURFACE, & SUSPENSION LIGHTING	1	399
SUR5LEDI	RECESSED, SURFACE, & SUSPENSION LIGHTING	1	400
SUR5LEDIEM	RECESSED, SURFACE, & SUSPENSION LIGHTING	1	400
SUR5LEDIEMG	RECESSED, SURFACE, & SUSPENSION LIGHTING	1	400
SUR5LEDIG	RECESSED, SURFACE, & SUSPENSION LIGHTING	1	400
SUR5SL	RECESSED, SURFACE, & SUSPENSION LIGHTING	1	399
SUR5SLBK	RECESSED, SURFACE, & SUSPENSION LIGHTING	1	399
SUR5SLEM	RECESSED, SURFACE, & SUSPENSION LIGHTING	1	399
SUR5SLEMBK	RECESSED, SURFACE, & SUSPENSION LIGHTING	1	399
SUR5SLEMG	RECESSED, SURFACE, & SUSPENSION LIGHTING	1	399
SUR5SLG	RECESSED, SURFACE, & SUSPENSION LIGHTING	1	399
Code	Catalogue Section	Qty	Page
T			
T02	LAMPS & LIGHTING ACCESSORIES	1	448
T8LB14	COMMERCIAL BATTENS	4	407
T8LB15	COMMERCIAL BATTENS	4	407
T8LB16	COMMERCIAL BATTENS	4	407
T8LB24	COMMERCIAL BATTENS	4	407
T8LB25	COMMERCIAL BATTENS	4	407
T8LB26	COMMERCIAL BATTENS	4	407
T8LED6	COMMERCIAL BATTENS	1	406,443
T8LED6D	COMMERCIAL BATTENS	1	406,443
T8LEDP18CW	COMMERCIAL BATTENS	4	406,443
T8LEDP18DL	COMMERCIAL BATTENS	4	406,443
T8LEDP24CW	COMMERCIAL BATTENS	4	406,443
T8LEDP24DL	COMMERCIAL BATTENS	4	406,443
T8LEDP9CW	COMMERCIAL BATTENS	4	406,443
T8LEDP9DL	COMMERCIAL BATTENS	4	406,443
TE1	WIRING BASICS	1	202
TE3	WIRING BASICS	1	202
TE4B	WIRING BASICS	1	202
TNXOBEZBK	BULKHEADS & WALL PACKS	1	373
TNXOBEZW	BULKHEADS & WALL PACKS	1	373
TNXOCBK	BULKHEADS & WALL PACKS	1	372
TNXOCW	BULKHEADS & WALL PACKS	1	372
TNXPROCBK	BULKHEADS & WALL PACKS	1	372
TNXPROCEBK	BULKHEADS & WALL PACKS	1	372
TNXPROCEG	BULKHEADS & WALL PACKS	1	372
TNXPROCG	BULKHEADS & WALL PACKS	1	372
TNXQBEZBK	BULKHEADS & WALL PACKS	1	373
TNXQBEZW	BULKHEADS & WALL PACKS	1	373
TNXQCBK	BULKHEADS & WALL PACKS	1	372
TNXQCW	BULKHEADS & WALL PACKS	1	372
TNXT	BULKHEADS & WALL PACKS	1	373
TNXTEM	BULKHEADS & WALL PACKS	1	373
TNXTMW	BULKHEADS & WALL PACKS	1	373
TNXTMWEM	BULKHEADS & WALL PACKS	1	373
TNXTMWST	BULKHEADS & WALL PACKS	1	373
TNXTP	BULKHEADS & WALL PACKS	1	373
TNXTPEM	BULKHEADS & WALL PACKS	1	373
TNXTST	BULKHEADS & WALL PACKS	1	373
TORODO	OUTDOOR WALL LIGHTS	1	319

Code	Catalogue Section	Qty	Page
T			
TOROUP	OUTDOOR WALL LIGHTS	1	319
TPOV60B	BULKHEADS & WALL PACKS	1	326,377
TRIBCTBC	UNDER CABINET LIGHTING	1	291
TRK1MABK	CEILING & WALL LIGHTS	1	260
TRK1MAS	CEILING & WALL LIGHTS	1	260
TRK1MAW	CEILING & WALL LIGHTS	1	260
TRK2MABK	CEILING & WALL LIGHTS	1	260
TRK2MAS	CEILING & WALL LIGHTS	1	260
TRK2MAW	CEILING & WALL LIGHTS	1	260
TRK3MABK	CEILING & WALL LIGHTS	1	260
TRK3MAS	CEILING & WALL LIGHTS	1	260
TRK3MAW	CEILING & WALL LIGHTS	1	260
TRK8270BC	CEILING & WALL LIGHTS	1	264
TRK8270BK	CEILING & WALL LIGHTS	1	264
TRK8270W	CEILING & WALL LIGHTS	1	264
TRK8271BC	CEILING & WALL LIGHTS	1	264
TRK8271BK	CEILING & WALL LIGHTS	1	264
TRK8271W	CEILING & WALL LIGHTS	1	264
TRKAD1BK	CEILING & WALL LIGHTS	1	260
TRKAD1S	CEILING & WALL LIGHTS	1	260
TRKAD1W	CEILING & WALL LIGHTS	1	260
TRKC1BK	CEILING & WALL LIGHTS	1	260
TRKC1S	CEILING & WALL LIGHTS	1	260
TRKC1W	CEILING & WALL LIGHTS	1	260
TRKDE1BK	CEILING & WALL LIGHTS	1	260
TRKDE1S	CEILING & WALL LIGHTS	1	260
TRKDE1W	CEILING & WALL LIGHTS	1	260
TRKFC1BK	CEILING & WALL LIGHTS	1	260
TRKFC1S	CEILING & WALL LIGHTS	1	260
TRKFC1W	CEILING & WALL LIGHTS	1	260
TRKFCBK	CEILING & WALL LIGHTS	1	260
TRKFCS	CEILING & WALL LIGHTS	1	260
TRKIT4ABC	CEILING & WALL LIGHTS	1	265
TRKIT4ABK	CEILING & WALL LIGHTS	1	265
TRKIT4AW	CEILING & WALL LIGHTS	1	265
TRKIT4BC	CEILING & WALL LIGHTS	1	265
TRKIT4BK	CEILING & WALL LIGHTS	1	265
TRKIT8ABC	CEILING & WALL LIGHTS	1	265
TRKIT8ABK	CEILING & WALL LIGHTS	1	265
TRKIT8AW	CEILING & WALL LIGHTS	1	265
TRKLC1BK	CEILING & WALL LIGHTS	1	260
TRKLC1S	CEILING & WALL LIGHTS	1	260
TRKLC1W	CEILING & WALL LIGHTS	1	260
TRKPF1BK	CEILING & WALL LIGHTS	1	260
TRKPF1S	CEILING & WALL LIGHTS	1	260
TRKPF1W	CEILING & WALL LIGHTS	1	260
TRKRA1BK	CEILING & WALL LIGHTS	1	260
TRKRA1S	CEILING & WALL LIGHTS	1	260
TRKRA1W	CEILING & WALL LIGHTS	1	260
TRKSP1ABC	CEILING & WALL LIGHTS	1	261
TRKSP1ABK	CEILING & WALL LIGHTS	1	261
TRKSP1AW	CEILING & WALL LIGHTS	1	261
TRKSP2ABC	CEILING & WALL LIGHTS	1	261
TRKSP2ABK	CEILING & WALL LIGHTS	1	261
TRKSP2AW	CEILING & WALL LIGHTS	1	261
TRKSP3ABC	CEILING & WALL LIGHTS	1	261
TRKSP3ABK	CEILING & WALL LIGHTS	1	261
TRKSP3AW	CEILING & WALL LIGHTS	1	261
TRKSP4ABC	CEILING & WALL LIGHTS	1	262
TRKSP4ABK	CEILING & WALL LIGHTS	1	262
TRKSP4AW	CEILING & WALL LIGHTS	1	262
TRKSP5ABC	CEILING & WALL LIGHTS	1	262
TRKSP5ABK	CEILING & WALL LIGHTS	1	262
TRKSP5AW	CEILING & WALL LIGHTS	1	262
TRKSP8ABC	CEILING & WALL LIGHTS	1	263
TRKSP8ABK	CEILING & WALL LIGHTS	1	263
TRKSP8AW	CEILING & WALL LIGHTS	1	263
TRKSP9ABC	CEILING & WALL LIGHTS	1	263
TRKSP9ABK	CEILING & WALL LIGHTS	1	263
TRKSP9AW	CEILING & WALL LIGHTS	1	263
TRKSUS	CEILING & WALL LIGHTS	1	255
TRKT1BK	CEILING & WALL LIGHTS	1	260
TRKT1S	CEILING & WALL LIGHTS	1	260
TRKT1W	CEILING & WALL LIGHTS	1	260
TRKX1BK	CEILING & WALL LIGHTS	1	260
TRKX1S	CEILING & WALL LIGHTS	1	260
TRKX1W	CEILING & WALL LIGHTS	1	260

Code	Catalogue Section	Qty	Page
U			
UC1000	UNDER CABINET LIGHTING	1	289
UC250	UNDER CABINET LIGHTING	1	289
UC500	UNDER CABINET LIGHTING	1	289
UCLCT13	UNDER CABINET LIGHTING	1	288
UCLCT18	UNDER CABINET LIGHTING	1	288
UCLCT4	UNDER CABINET LIGHTING	1	288
UCLCT9	UNDER CABINET LIGHTING	1	288
UCLED13CW	UNDER CABINET LIGHTING	1	289
UCLED13WW	UNDER CABINET LIGHTING	1	289

Code	Catalogue Section	Qty	Page
U			
UCLED18CW	UNDER CABINET LIGHTING	1	289
UCLED18WW	UNDER CABINET LIGHTING	1	289
UCLED22CW	UNDER CABINET LIGHTING	1	289
UCLED22WW	UNDER CABINET LIGHTING	1	289
UCLED4CW	UNDER CABINET LIGHTING	1	289
UCLED4WW	UNDER CABINET LIGHTING	1	289
UCLED7CW	UNDER CABINET LIGHTING	1	289
UCLED7WW	UNDER CABINET LIGHTING	1	289
UCLED9CW	UNDER CABINET LIGHTING	1	289
UCLED9WW	UNDER CABINET LIGHTING	1	289
UNDK3BCCW	UNDER CABINET LIGHTING	1	292
UNDK3WCW	UNDER CABINET LIGHTING	1	292
UNDK3WWW	UNDER CABINET LIGHTING	1	292
UNDKCON	UNDER CABINET LIGHTING	1	292
UNDKIT3BCCW	UNDER CABINET LIGHTING	1	292
UNDKIT3BCWW	UNDER CABINET LIGHTING	1	292
UNDKIT3WCW	UNDER CABINET LIGHTING	1	292
UNDKIT3WWW	UNDER CABINET LIGHTING	1	292
Code	Catalogue Section	Qty	Page
V			
VEXA5	RECESSED, SURFACE, & SUSPENSION LIGHTING	1	401
VEXA5EM	RECESSED, SURFACE, & SUSPENSION LIGHTING	1	401
VFCFBC	DOWNLIGHTS	1	246
VFCFC	DOWNLIGHTS	1	246
VFCFIPBC	DOWNLIGHTS	1	247
VFCFIPC	DOWNLIGHTS	1	247
VFCFIPW	DOWNLIGHTS	1	247
VFCFTBC	DOWNLIGHTS	1	247
VFCFTC	DOWNLIGHTS	1	247
VFCFTW	DOWNLIGHTS	1	247
VFCFW	DOWNLIGHTS	1	246
VFR200I	MOULDED - SQUARE EDGE	1	12,23,50,67,84,114
VIRE2	NON-CORROSIVE	1	420
VIRE4	NON-CORROSIVE	1	420
VIRE5	NON-CORROSIVE	1	420
VVA4BK	RECESSED, SURFACE, & SUSPENSION LIGHTING	1	403
VVA4W	RECESSED, SURFACE, & SUSPENSION LIGHTING	1	403
VVA5BK	RECESSED, SURFACE, & SUSPENSION LIGHTING	1	403
VVA5W	RECESSED, SURFACE, & SUSPENSION LIGHTING	1	403
VVAEMKIT	RECESSED, SURFACE, & SUSPENSION LIGHTING	1	403
Code	Catalogue Section	Qty	Page
W			
WAD12AA	OUTDOOR WALL LIGHTS	1	324
WAD12ABK	OUTDOOR WALL LIGHTS	1	324
WAD12AA	OUTDOOR WALL LIGHTS	1	324
WALL1L	OUTDOOR WALL LIGHTS	1	312
WALL1LBK	OUTDOOR WALL LIGHTS	1	312
WALL1LC	OUTDOOR WALL LIGHTS	1	312
WALL2	OUTDOOR WALL LIGHTS	1	315
WALL2L	OUTDOOR WALL LIGHTS	1	313
WALL2LBK	OUTDOOR WALL LIGHTS	1	313
WALL2LC	OUTDOOR WALL LIGHTS	1	313
WALL3	OUTDOOR WALL LIGHTS	1	315
WALL3L	OUTDOOR WALL LIGHTS	1	313
WALL3LBK	OUTDOOR WALL LIGHTS	1	313
WALL3LC	OUTDOOR WALL LIGHTS	1	313
WALL4LSS	OUTDOOR WALL LIGHTS	1	314
WALL5LSS	OUTDOOR WALL LIGHTS	1	314
WGULED	GROUNDLIGHTS & DECK LIGHTING	1	344
WP21CCT	BULKHEADS & WALL PACKS	1	327,378
WPASCWA	BULKHEADS & WALL PACKS	1	328,379
WPCWA	BULKHEADS & WALL PACKS	1	327,378
WPCWAEM	BULKHEADS & WALL PACKS	1	327,378
WSGULED	GROUNDLIGHTS & DECK LIGHTING	1	344

NOTES

NOTES

NOTES

ABOUT US

Founded in 1998, Knightsbridge has grown into one of the UK's most trusted names in lighting and electrical wiring accessories. We offer a wide, competitively priced range of products - from switches and sockets to fire-rated downlights and commercial lighting solutions - designed to meet the practical needs of installers, contractors, and specifiers.

What sets us apart is our approach to customer service.
At Knightsbridge, it's more than a department - it's a mindset. We aim to make life easier for the electrical trade through reliable next-day delivery across mainland UK, strong stock availability, and a product range that keeps growing in both depth and variety.

Our goal is to be a partner that the trade can rely on, providing quality, specification-ready products that help make installations safe, efficient, and hassle-free.

Whether you're already working with us or discovering Knightsbridge for the first time, we're confident you'll see why our customers keep coming back.

ESTABLISHED IN 1998

3000+ PRODUCTS IN STOCK

£12M INVENTORY - READY TO SUPPLY

UK-WIDE WHOLESALE COVERAGE WITH SPECIFICATION TEAM

BACKED BY A £250M GROUP OPERATING ACROSS 13 COUNTRIES

COMMITTED TO A BRIGHTER FUTURE

OFFICE HOURS:

Mon-Thu: 8am to 5.30pm
Fri: 8am to 5pm
Closed on weekends

Tel: 01582 88 77 60
Enquiries: sales@mlaccessories.co.uk
Orders: orders@mlaccessories.co.uk
www.mlaccessories.co.uk

“committed to
a brighter future”

01582 887760

www.mlaccessories.co.uk



FSC
www.fsc.org
MIX
Paper | Supporting responsible forestry
FSC® C006518