



INSTALLATION & MAINTENANCE MANUAL

SKR8L / SKR94L

GENERAL INSTRUCTIONS

These instructions should be read carefully and retained after installation by the end user for future reference and maintenance.

**These instructions should be used to aid installation of the following product:
SKR8L / SKR94L**

SAFETY

- These products must be installed in accordance with the latest edition of the IEE Wiring Regulations (BS7671) and current Building Regulations. If in any doubt, consult a qualified electrician
- Please isolate mains prior to installation or maintenance
- Check the total load on the circuit (including when these products are fitted) does not exceed the rating of the circuit cable, fuse or circuit breaker
- Please note the IP (Ingress Protection) rating of this product when deciding the location for installation
- Do not overload this accessory or subject it to conditions outside its rating
- These products are for indoor use only
- These products are Class I and must be earthed
- These products are IP20 rated

INSTALLATION

- Provide power to the required point of installation (refer to BS7671 for correct cabling methods)
- Locate a suitable place to mount the product
- Mark the location of the fixing holes and drill the holes ensuring not to infringe with any gas/water pipes or electrical cables
- Connect to the mains supply ensuring the correct polarity is observed (see Fig. 1): L – Live (brown), E – Earth (green/yellow), N – Neutral (blue)

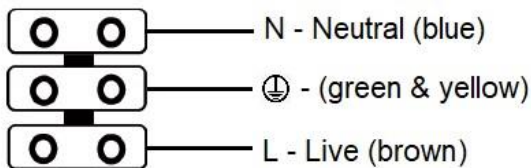


Fig. 1

- Check all electrical connections are secure with all exposed copper within the terminal and no loose strands of cable
- Secure the fitting to the mounting surface with the screws already provided in holes and cap covers over the screws (see Fig. 2)


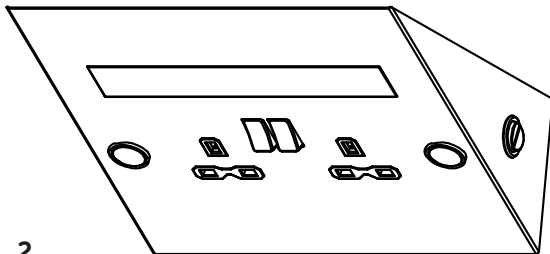


Fig. 2

- To operate the strip light, there is a switch on the right side of the fitting
- Switch on and check for correct operation

WARNING

These products must be disconnected from the circuit if subjected to any high voltage or insulation resistance testing. Irreparable damage will occur if this instruction is not followed.



USB or Bluetooth products, dimmers, shaver sockets and products with LED or neon indicators must be disconnected from the circuit if subjected to any high voltage or insulation resistance testing. Irreparable damage will occur if this instruction is not followed.

Please note this kind of damage will void the warranty.

Please note that we do not recommend our 13A sockets be used for Electric Vehicle (EV) charging for prolonged periods.

GENERAL

These products contains a light source of energy efficiency class E to Regulation (EU) No. 2019/2015 and (UK) 2021 No. 1095.

These products contains a non-replaceable LED light source and a control gear which can be replaced by a professional.



Clean with a soft dry cloth only, do not use aggressive cleaning products or solvents which may damage the product.

These products are non-dimmable.

These products should be dismantled for disposal when it reaches the end of its life. Please see website for dismantling instructions.

These products should be recycled in the correct manner when it reaches the end of its life. Check local authorities for where facilities exist.

WARRANTY

These products have a warranty of 2 years from date of purchase. Failure to install this product in accordance with the current edition of the IEE Wiring Regulations (BS7671), improper use, or removal of the batch code will invalidate the warranty. If this product should fail within its warranty period, it should be returned to the place of purchase for a free of charge replacement. ML Accessories does not accept responsibility for any installation costs associated with the replacement product. Your statutory rights are not affected. ML Accessories reserve the right to alter product specification without prior notice.

SUPPLIED BY:

(UK) MANUFACTURER

ML ACCESSORIES LTD, UNIT E CHILTERN PARK,
BOSCOMBE ROAD, DUNSTABLE LU5 4LT,
WWW.MLACCESSORIES.CO.UK

(EU) AUTHORISED REPRESENTATIVE

SLV LIGHTING GROUP,
DAIMLERSTRASSE 21-23,
52531 ÜBACH-PALENBERG, GERMANY
EMAIL: EPREL@GROUP.SLV.COM

MADE IN CHINA

230V
50Hz



IP20



-10~
40°C
TA



ML
ACCESSORIES LTD



UK
CA



11