



INSTALLATION & MAINTENANCE MANUAL

SPKEVFPIR

GENERAL INSTRUCTIONS

These instructions should be read carefully and retained after installation by the end user for future reference and maintenance.

**These instructions should be used to aid installation of the following product:
SPKEVFPIR**

SAFETY

- This product must be installed in accordance with the latest edition of the IEE Wiring Regulations (BS7671) and current Building Regulations. If in any doubt, consult a qualified electrician
- Please isolate mains prior to installation or maintenance
- Check the total load on the circuit (including when this luminaire is fitted) does not exceed the rating of the circuit cable, fuse or circuit breaker
- Please note the IP (Ingress Protection) rating of this product when deciding the location for installation
- If used under insulation, the insulation should be laid unbroken over the luminaire (not packed around it). Only mineral wool style insulation may be used
- Do not overload this accessory or subject it to conditions outside its rating
- This product is for indoor use only
- This product is Class II double insulated
- This product is IP65 rated (IP20 from above)

INSTALLATION

- Provide power to the required point of installation
- Cut a suitable hole in the mounting surface as per the cut-out details (see Fig. 1) ensuring not to infringe with any joists, gas/water pipes or electrical cables




Fig. 1

- Open the terminal cover by squeezing the two lugs and push up (see Fig. 2)




Fig. 2

- Ensuring correct polarity is observed, carefully wire as shown in Fig. 3

Note: The earth terminal is non-functional and only provided for convenience

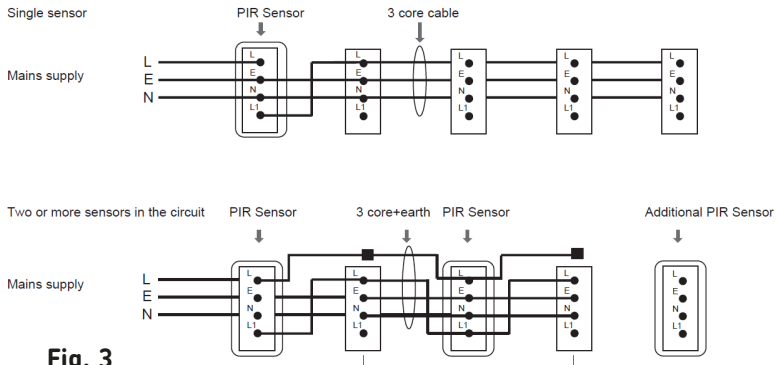


Fig. 3

- Close the terminal cover
- Select the required colour temperature and sensor settings via the four-position switches which are accessed beneath the magnetic bezel
- The additional terminal (L1) is available to enable the sensor to power on additional uminaires. A max. 200W LED load can be controlled by the sensor


1. Time Setting

10s-1min-5min-10min





2. Sensitivity setting

1m-2m-3m-4m



3. Lux setting

10-100-300-500lux



4. Light Sensor 5. PIR Sensor 6. CCT Setting Switch

- Pressing the wall switch twice in succession will keep light on for 8 hours, after 8 hours the settings will automatically revert

Fig. 4

- Lift both spring clips on the sides of the fitting and push into the ceiling (see Fig. 4)

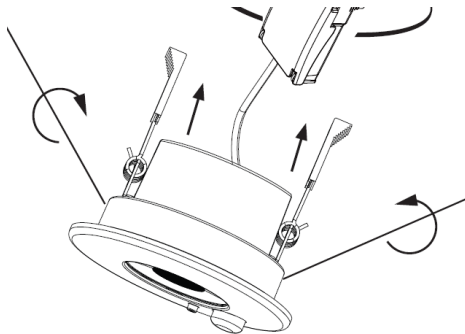


Fig. 4

- Switch on and check for correct operation

WARNING

This product must be disconnected from the circuit if subjected to any high voltage or insulation resistance testing. Irreparable damage will occur if this instruction is not followed.

GENERAL

This product contains a light source of energy efficiency class E to Regulation (EU) No. 2019/2015 and (UK) 2021 No. 1095.

This product contains a non-replaceable light source / a non-replaceable LED light source and a non-replaceable control gear



Clean with a soft dry cloth only, do not use aggressive cleaning products or solvents which may damage the product.

This product is non-dimmable.

This product should be dismantled for disposal when it reaches the end of its life. Please see website for dismantling instructions.

This product should be recycled in the correct manner when it reaches the end of its life. Check local authorities for where facilities exist.

luminaire should be destroyed

WARRANTY

This product has a warranty of 7 years from date of purchase. Failure to install this product in accordance with the current edition of the IEE Wiring Regulations (BS7671), improper use, or removal of the batch code will invalidate the warranty. If this product should fail within its warranty period, it should be returned to the place of purchase for a free of charge replacement. ML Accessories does not accept responsibility for any installation costs associated with the replacement product. Your statutory rights are not affected. ML Accessories reserve the right to alter product specification without prior notice.

SUPPLIED BY:

(UK) MANUFACTURER

ML ACCESSORIES LTD, UNIT E CHILTERN PARK,
BOSCOMBE ROAD, DUNSTABLE LU5 4LT,
WWW.MLACCESSORIES.CO.UK

(EU) AUTHORISED REPRESENTATIVE

SLV LIGHTING GROUP,
DAIMLERSTRASSE 21-23,
52531 ÜBACH-PALENBERG, GERMANY
EMAIL: EPREL@GROUP.SLV.COM

MADE IN CHINA



ML
ACCESSORIES LTD



**UK
CA**



55

JBDEC25_V1