



INSTALLATION & MAINTENANCE MANUAL

NH0183BD / NH0184SQ



GENERAL INSTRUCTIONS

These instructions should be read carefully and retained after installation by the end user for future reference and maintenance.

These instructions should be used to aid installation of the following products:

NH0183BD / NH0184SQ

SAFETY

- This product must be installed in accordance with the latest edition of the IEE Wiring Regulations (BS7671) and current Building Regulations. If in any doubt, consult a qualified electrician
- Please isolate mains prior to installation or maintenance
- Check the total load on the circuit (including when this luminaire is fitted) does not exceed the rating of the circuit cable, fuse or circuit breaker
- Please note the IP (Ingress Protection) rating of this luminaire when deciding the location for installation
- This product is for indoor use only
- This product is Class I and must be earthed
- This product series is IP20 rated

INSTALLATION

- Provide power to the required point of installation
- NH0183BD: using a 7mm spanner, remove the two nuts securing the baseplate to the luminaire
- NH0184SQ: remove the two screws either side of the baseplate
- Using the baseplate as a template, mark the location of the fixing holes and drill the holes ensuring not to infringe with any gas/water pipes or electrical cables
- Fix the baseplate to a suitable solid surface using the screws provided
- Connect the luminaire to the mains supply ensuring the correct polarity is observed (see Fig. 1):
L - Live (brown), E - Earth (green/yellow), N - Neutral (blue)

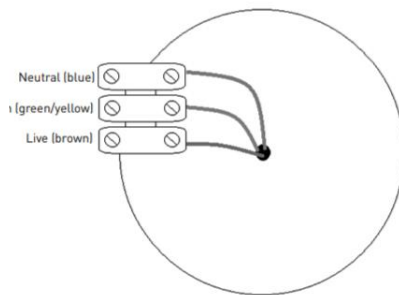


Fig. 1

- Fit two suitable GU10 lamps
- Switch on and check for correct operation

GENERAL

Clean with a soft dry cloth only, do not use aggressive cleaning products or solvents which may damage the product.

This product is dimmable dependent on lamp type, please check compatibility before installation.

This product should be recycled in the correct manner when it reaches the end of its life. Check local authorities for where facilities exist.



WARRANTY

This product has a warranty of 1 year from date of purchase. Failure to install this product in accordance with the current edition of the IEE Wiring Regulations (BS7671), improper use, or removal of the batch code will invalidate the warranty. If this product should fail within its warranty period, it should be returned to the place of purchase for a free of charge replacement. ML Accessories does not accept responsibility for any installation costs associated with the replacement product. Your statutory rights are not affected. ML Accessories reserve the right to alter product specification without prior notice.





INTERNATIONAL
CONTACT DETAILS



230V
50Hz

IP20



ML
ACCESSORIES LTD



UK
CA
CE



02

ML Accessories Limited LU5 4LT
www.mlaccessories.co.uk

AKOCT21_V2

