



INSTALLATION & MAINTENANCE MANUAL

**EXDF**

## GENERAL INSTRUCTIONS

**These instructions should be read carefully and retained after installation by the end user for future reference and maintenance.**

**These instructions should be used to aid installation of the following product:  
EXDF**

## SAFETY

- This product is intended for normal domestic/household use only
- Never install the unit where it could be subject to:
  - heat sources such as radiators, cookers, or stoves
  - direct sunlight
  - mechanical vibration or shock
  - excessive dust
  - lack of ventilation, such as inside a cabinet or bookcase
  - immersion in liquid or exposure to splashing
  - objects which may be pulled into the airstream such as curtains
- This product should not be left running unattended
- Avoid contact with moving parts. Do not insert any body parts or objects through the grill when the fan is operating
- Do not cover the grill or operate in proximity of curtains, drapes, etc


- This product should not be operated if it has been dropped, damaged or shows signs of malfunction
- This product must be switched off and unplugged before assembling or disassembling
- This product must be used on an even and stable surface to avoid overturning
- Please note the IP (Ingress Protection) rating of this product when deciding the location for installation
- This product is for indoor use only
- This product is Class II double insulated
- This product is IP20 rated

## **PRODUCT ASSEMBLY**


Note – Please note that this product is not designed to be used by persons (including children) with reduced physical, sensory, or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction

- Provide power to the required point of installation (a 13A socket is required per unit)

1. Front grille
2. Blade cap
3. Blade
4. Plastic mounting nut
5. Rear grille
6. Motor shaft
7. Oscillation control
8. Motor housing
9. Fan housing pedestal
10. Speed control settings
11. Base cover
12. Retaining screw
13. Power cord
14. Base

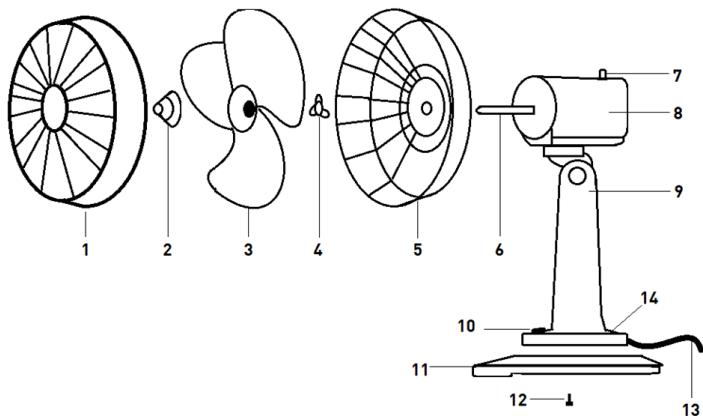

- Place the base onto a flat even surface
- Fix the base cover (11) to the base (14) by clipping it into place and fix it using the retaining screw (12), the retaining screw is taped on the back of the base cover (11). Do not overtighten the screw, (see Fig. 1)



**Fig. 1**

- Remove the blade cap (2) and plastic mounting nut (4) from the motor shaft (6)
- Place the rear grille (5) on the motor shaft (6) ensuring that the lugs from the motor housing fit into the slots of the grille (if this is done correctly, the carrying handle should be at the top) and fix in place with the plastic mounting nut (4) (see Fig. 2)



**Fig. 2**



Locking nut

- Insert the blade (3) on the motor shaft (6) and secure in place with blade cap (2) by turning anti-clockwise (see Fig. 3)



**Fig. 3**

- Secure the front grille (1) by fastening the clips and fitting the screw on the bottom (see Fig. 4)



**Fig. 4**

## WARNING

This product must be disconnected from the circuit if subjected to any high voltage or insulation resistance testing. Irreparable damage will occur if this instruction is not followed.

## GENERAL

Clean with a soft dry cloth only, do not use aggressive cleaning products or solvents that may damage the product.

This product should be recycled in the correct manner when it reaches the end of its life. Check local authorities for where facilities exist.

## WARRANTY

This product has a warranty of 1 year from the date of purchase. Failure to install this product in accordance with the current edition of the IEE Wiring Regulations (BS7671), improper use, or removal of the batch code will invalidate the warranty. If this product should fail within its warranty period, it should be returned to the place of purchase for a free of charge replacement. ML Accessories does not accept responsibility for any installation costs associated with the replacement product. Your statutory rights are not affected. ML Accessories reserve the right to alter product specification without prior notice.

**SUPPLIED BY:**

**(UK) MANUFACTURER**

**ML ACCESSORIES LTD, UNIT E CHILTERN PARK,  
BOSCOMBE ROAD, DUNSTABLE LU5 4LT,  
WWW.MLACCESSORIES.CO.UK**

**(EU) AUTHORISED REPRESENTATIVE**

**SLV LIGHTING GROUP,  
DAIMLERSTRASSE 21-23,  
52531 ÜBACH-PALENBERG, GERMANY  
EMAIL: EPREL@GROUP.SLV.COM**

MADE IN CHINA

**230V  
50Hz**

**IP20**



**40W**

**ML**  
ACCESSORIES LTD



**UK  
CA CE**



**106**

AVOCT25\_V2